

CATALOGO
PRODOTTI ITALIA





L'azienda produttrice è inserita nella tradizione industriale italiana da quarant'anni e riconosciuta per l'alta qualità e il senso estetico.

La progettazione e l'intero ciclo produttivo avvengono interamente in Italia.

Ogni prodotto parte da uno studio della luce e del suo impiego, per arrivare ad ottimizzare al meglio le performance tecniche e l'efficienza luminosa.

Grande attenzione nell'utilizzo di LED dei migliori marchi e nella scelta del miglior alluminio e acciaio inox rigorosamente AISI 316L.

La lavorazione della materia prima, la progettazione tecnica, la produzione meccanica ed elettronica e l'intero processo di verniciatura, sono interamente realizzati con meticolosità e precisione.



















































Prima di essere messo sul mercato, ogni prodotto viene testato e sottoposto a rigorose valutazioni affinché la sorgente luminosa possa lavorare nelle migliori condizioni possibili e raggiungere l'eccellenza in termini di affidabilità, funzionalità e sicurezza.

L'attenzione alla qualità dei prodotti permette di mantenere inalterati l'aspetto e le loro proprietà illuminotecniche nel tempo.

Made in Italy



Technical
details

| | | | | | |
|---|----------------------------------|---|---|---|--|
|  | S= Very Narrow Beam |  | Ceiling, Wall, Bottom Up Track |  | Conform To European Union Norms |
|  | N= Narrow Beam |  | Ceiling Recessed |  | Energy Label |
|  | M= Medium Beam |  | Ceiling, Wall Recessed |  | Weight gr. |
|  | W= Wide Beam |  | Ceiling, Wall, Floor Recessed |  | Flame Resistant |
|  | X= Very Wide Beam |  | Surface Floor Fixing |  | Water Resistant |
|  | T= Transparent Glass No optics |  | Zoom |  | UV Resistant |
|  | D= Diffused Glass No optics |  | Different Optics Available |  | Solvent Resistant |
|  | E= Elliptic Beam |  | Adjustable Beam |  | Walk - Over |
|  | R= Diffused 360° |  | Antiglare System |  | Drive - Over |
|  | A2= Wall Washer Beam - Ceiling |  | Dimmer |  | RAL on Request |
|  | A2= Wall Washer Beam - Floor |  | Round Hole Dimension ∅ XX mm |  | Maximum Depth of Immersion - 3mt. |
|  | L= Linear Beam |  | Square Hole Dimension XX mm |  | Protection Against Solid Bodies with diameter larger than 12 mm No Protection Against Water |
|  | A= Asymmetric Beam |  | Magnetic Application |  | Protection Against Solid Bodies with diameter larger than 1 mm No Protection Against Water |
|  | Ceiling Surface |  | Tear Resistant System |  | Total Protection Against Dust and Water Jet |
|  | Ceiling, Wall Surface |  | Class 1 Fitted With Earth Protection |  | Total Protection Against Dust and Temporary Immersion |
|  | Ceiling, Wall, Bottom Up Surface |  | Class 2 No Connection To Electrical Earth |  | Total Protection Against Dust and Permanent Immersion |
|  | Ceiling, Wall Track |  | Class 3 Low Voltage System | | |



8

Recessed
Appliques
Paletti
Linear lights

Pag. 12
Pag. 22
Pag. 26
Pag. 40



JEWELLERY & MUSEUM

46

Static recessed
Backward optic recessed
Trimless recessed
Adjustable recessed
Ceiling and wall surface
Track lights
Linear lights

Pag. 51
Pag. 58
Pag. 62
Pag. 72
Pag. 80
Pag. 90
Pag. 96



INDOOR

102

Spotlights
Inox spotlights
Architectural lights
Floor recessed
Grazing lights
Ceiling recessed
Wall recessed
Linear lights

Pag. 108
Pag. 120
Pag. 130
Pag. 134
Pag. 160
Pag. 166
Pag. 180
Pag. 188



OUTDOOR

194

Garden lights

Pag. 197



GARDEN

234

Adjustable spotlights
Static spotlights
Recessed spotlights

Pag. 238
Pag. 238
Pag. 246



UNDERWATER



Jewellery & Museum





Recessed
pag. 13



Recessed
pag. 14



Recessed
pag. 14



Recessed
pag. 15



Recessed
pag. 15



Recessed
pag. 16



Recessed
pag. 16



Recessed
pag. 17



Recessed
pag. 18



Recessed
pag. 19



Recessed
pag. 20



Applique
pag. 23



Applique
pag. 24



Applique
pag. 25



Paletti
pag. 27



Paletti
pag. 28



Paletti
pag. 29



Paletti
pag. 30



Paletti
pag. 31



Paletti
pag. 32



Paletti
pag. 33



Paletti
pag. 34



Paletti
pag. 35



Paletti
pag. 36



Paletti
pag. 38-39



Linear Light
pag. 41



Linear Light
pag. 42





Linear Light
pag. 43



Linear Light
pag. 44

Recessed

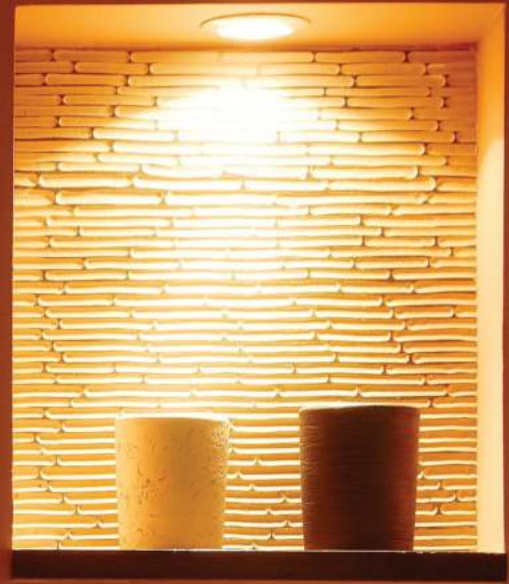


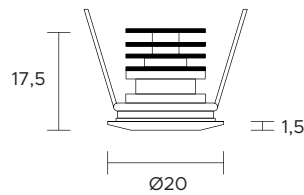



Ø 17mm





| | | | | | | | | | | | | | | | | |
|-------------------------------|--|-----|---------|-------|---|---|--|--|--|--|--|-----|-----|-----|---------|-------|
| POWER SUPPLY | max 1W - max 350mA | | | | | | | | | | | | | | | |
| CODE | AV02160GN | | | | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber | | | | | | | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>M</td> <td>W</td> <td>X</td> <td>E</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>20°</td> <td>35°</td> <td>50°</td> <td>20°x45°</td> <td>Diff.</td> </tr> </table> | M | W | X | E | D | | | | | | 20° | 35° | 50° | 20°x45° | Diff. |
| M | W | X | E | D | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| 20° | 35° | 50° | 20°x45° | Diff. | | | | | | | | | | | | |
| FINISHES | W - White G - Grey B - Black | | | | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 110lm (3000°K, 350mA) | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 100lm (3000°K, 350mA, 50°) | | | | | | | | | | | | | | | |
| LED NUMBER | 1 power LED | | | | | | | | | | | | | | | |
| MATERIAL | body in anodized aluminium, flange in anodized or painted aluminium | | | | | | | | | | | | | | | |
| DRIVER | not included. | | | | | | | | | | | | | | | |
| POWER CABLE | includes 0,5 mt FEP 2 x 0,35 cable | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | |
| MOUNTING | recessed (ceiling, wall, bottom up) | | | | | | | | | | | | | | | |
| NOTES | other RAL on request | | | | | | | | | | | | | | | |

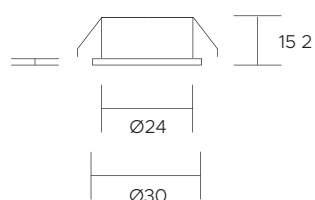

| | | | | | | | | | | | | | | | | |
|-------------------------------|--|-----|-----|---------|---|---|--|--|--|--|--|-----|-----|-----|-----|---------|
| POWER SUPPLY | max 1W - max 350mA | | | | | | | | | | | | | | | |
| CODE | AV02164GN | | | | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber | | | | | | | | | | | | | | | |
| OPTICS | <table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>30°x65°</td> </tr> </table> | N | M | W | X | E | | | | | | 10° | 25° | 40° | 60° | 30°x65° |
| N | M | W | X | E | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | 30°x65° | | | | | | | | | | | | |
| FINISHES | W - White G - Grey B - Black | | | | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 110lm (3000°K, 350mA) | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 110lm (3000°K, 350mA, 40°) | | | | | | | | | | | | | | | |
| LED NUMBER | 1 power LED | | | | | | | | | | | | | | | |
| MATERIAL | body in anodized aluminium, flange in anodized or painted aluminium | | | | | | | | | | | | | | | |
| DRIVER | not included, | | | | | | | | | | | | | | | |
| POWER CABLE | includes 0,5 mt FEP 2 x 0,35 cable | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | |
| MOUNTING | recessed (ceiling, wall, bottom up) | | | | | | | | | | | | | | | |
| NOTES | other RAL on request | | | | | | | | | | | | | | | |



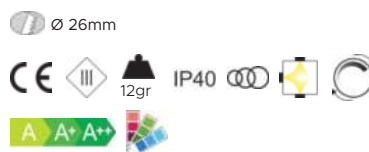
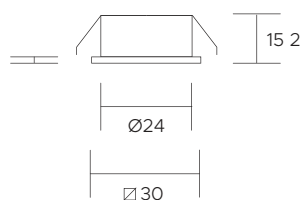


| | | | | | | | | | | | | | | | | |
|-------------------------------|--|-----|-----|---------|---|---|--|--|--|--|--|-----|-----|-----|-----|---------|
| POWER SUPPLY | max 1W - max 350mA | | | | | | | | | | | | | | | |
| CODE | AV02165GN | | | | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber | | | | | | | | | | | | | | | |
| OPTICS | <table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>30°x65°</td> </tr> </table> | N | M | W | X | E | | | | | | 10° | 25° | 40° | 60° | 30°x65° |
| N | M | W | X | E | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | 30°x65° | | | | | | | | | | | | |
| FINISHES | W - White G - Grey B - Black | | | | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 110lm (3000°K, 350mA) | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 110lm (3000°K, 350mA, 40°) | | | | | | | | | | | | | | | |
| LED NUMBER | 1 power LED | | | | | | | | | | | | | | | |
| MATERIAL | body in anodized aluminium, flange in anodized or painted aluminium | | | | | | | | | | | | | | | |
| DRIVER | not included, | | | | | | | | | | | | | | | |
| POWER CABLE | includes 0,5 mt FEP 2 x 0,35 cable | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | |
| MOUNTING | recessed (ceiling, wall, bottom up) | | | | | | | | | | | | | | | |
| NOTES | other RAL on request | | | | | | | | | | | | | | | |

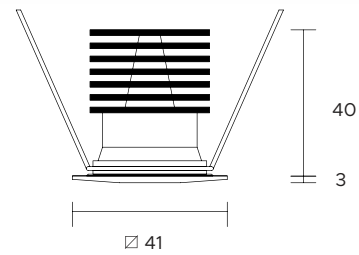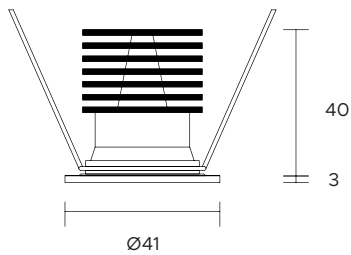


| | | | | | | | | | | | | | |
|-------------------------------|--|-----|---------|---|---|--|--|--|--|-----|-----|-----|---------|
| POWER SUPPLY | max 3W - max 350mA | | | | | | | | | | | | |
| CODE | AV02168GN | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber | | | | | | | | | | | | |
| OPTICS | <table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>30°</td> <td>40°x17°</td> </tr> </table> | N | M | W | E | | | | | 15° | 25° | 30° | 40°x17° |
| N | M | W | E | | | | | | | | | | |
| | | | | | | | | | | | | | |
| 15° | 25° | 30° | 40°x17° | | | | | | | | | | |
| FINISHES | W - White G - Grey B - Black | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 330lm (3000°K, 350mA) | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 250lm (3000°K, 350mA, 30°) | | | | | | | | | | | | |
| LED NUMBER | 3 power LEDs | | | | | | | | | | | | |
| MATERIAL | body in anodized aluminium, flange in anodized or painted aluminium | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | |
| POWER CABLE | includes 0,5 mt FEP 2 x 0,35 cable | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | |
| MOUNTING | recessed (ceiling, wall, bottom up) | | | | | | | | | | | | |
| NOTES | other RAL on request | | | | | | | | | | | | |

| | | | | | | | | | | | | | |
|-------------------------------|--|-----|---------|---|---|--|--|--|--|-----|-----|-----|---------|
| POWER SUPPLY | max 3W - max 350mA | | | | | | | | | | | | |
| CODE | AV02169GN | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber | | | | | | | | | | | | |
| OPTICS | <table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>30°</td> <td>40°x17°</td> </tr> </table> | N | M | W | E | | | | | 15° | 25° | 30° | 40°x17° |
| N | M | W | E | | | | | | | | | | |
| | | | | | | | | | | | | | |
| 15° | 25° | 30° | 40°x17° | | | | | | | | | | |
| FINISHES | W - White G - Grey B - Black | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 330lm (3000°K, 350mA) | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 250lm (3000°K, 350mA, 30°) | | | | | | | | | | | | |
| LED NUMBER | 3 power LEDs | | | | | | | | | | | | |
| MATERIAL | body in anodized aluminium, flange in anodized or painted aluminium | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | |
| POWER CABLE | includes 0,5 mt FEP 2 x 0,35 cable | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | |
| MOUNTING | recessed (ceiling, wall, bottom up) | | | | | | | | | | | | |
| NOTES | other RAL on request | | | | | | | | | | | | |

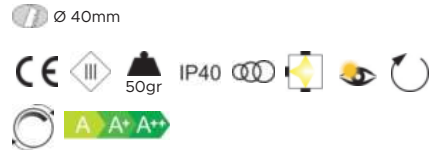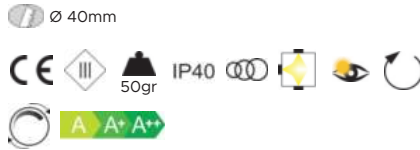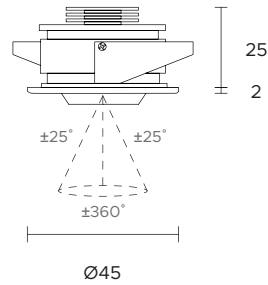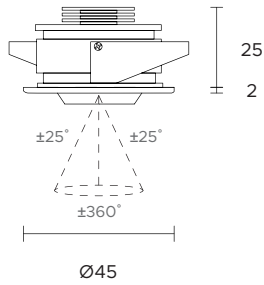

| | | | | | | | | | | | |
|-------------------------------|---|-----|-----|---------|---|---|-----|-----|-----|-----|---------|
| POWER SUPPLY | max 3W - max 700mA | | | | | | | | | | |
| CODE | AV02089GN | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber | | | | | | | | | | |
| OPTICS | <table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>30°x65°</td> </tr> </table> | N | M | W | X | E | 10° | 25° | 40° | 60° | 30°x65° |
| N | M | W | X | E | | | | | | | |
| 10° | 25° | 40° | 60° | 30°x65° | | | | | | | |
| FINISHES | G - Grey B - Black | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 190lm (3000°K, 700mA) | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 175lm (3000°K, 700mA, 40°) | | | | | | | | | | |
| LED NUMBER | 1 power LED | | | | | | | | | | |
| MATERIAL | body and flange in anodized aluminium | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | |
| POWER CABLE | includes 0,5 mt FEP 2 x 0,35 cable | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | |
| MOUNTING | recessed (ceiling, wall, bottom up) | | | | | | | | | | |
| NOTES | other finishes on request | | | | | | | | | | |


| | | | | | | | | | |
|-------------------------------|---|-----|---------|---|---|-----|-----|-----|---------|
| POWER SUPPLY | max 3W - max 350mA | | | | | | | | |
| CODE | AV02090GN | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber | | | | | | | | |
| OPTICS | <table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>E</td> </tr> <tr> <td>10°</td> <td>25°</td> <td>30°</td> <td>40°x17°</td> </tr> </table> | N | M | W | E | 10° | 25° | 30° | 40°x17° |
| N | M | W | E | | | | | | |
| 10° | 25° | 30° | 40°x17° | | | | | | |
| FINISHES | G - Grey B - Black | | | | | | | | |
| LUMEN OUTPUT SOURCE | 330lm (3000°K, 350mA) | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 250lm (3000°K, 350mA, 30°) | | | | | | | | |
| LED NUMBER | 3 power LEDs | | | | | | | | |
| MATERIAL | body and flange in anodized aluminium | | | | | | | | |
| DRIVER | not included | | | | | | | | |
| POWER CABLE | includes 0,5 mt FEP 2 x 0,35 cable | | | | | | | | |
| WIRING | in series | | | | | | | | |
| MOUNTING | recessed (ceiling, wall, bottom up) | | | | | | | | |
| NOTES | other finishes on request | | | | | | | | |

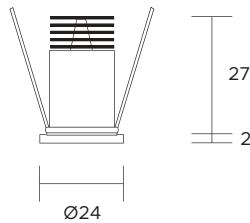

Ø 17mm




| | |
|-------------------------------|---|
| POWER SUPPLY | max 1W - max 350mA |
| CODE | AV02073GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber |
| OPTICS | M W X E 20° 35° 50° 20°x45° |
| FINISHES | W - White G - Grey B - Black |
| LUMEN OUTPUT SOURCE | 110lm (3000°K, 350mA) |
| DELIVERED LUMEN OUTPUT | 100lm (3000°K, 350mA, 50°) |
| LED NUMBER | 1 power LED |
| MATERIAL | body in anodized aluminium, flange in painted aluminium |
| DRIVER | not included |
| POWER CABLE | includes 0,5 mt FEP 2 x 0,35 cable |
| WIRING | in series |
| MOUNTING | recessed (ceiling, wall) |
| NOTES | other RAL on request |

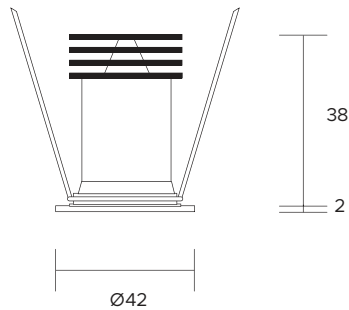

Ø 37mm






| | |
|-------------------------------|---|
| POWER SUPPLY | max 3W - max 700mA |
| CODE | AV02074GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber |
| OPTICS | N 10° M 25° W 40° X 60° E 30°x65° |
| FINISHES | W - White G - Grey B - Black |
| LUMEN OUTPUT SOURCE | 190lm (3000°K, 700mA) |
| DELIVERED LUMEN OUTPUT | 175lm (3000°K, 700mA, 40°) |
| LED NUMBER | 1 power LED |
| MATERIAL | body in anodized aluminium, flange in painted aluminium |
| DRIVER | not included |
| POWER CABLE | includes 0,5 mt FEP 2 x 0,35 cable |
| WIRING | in series |
| MOUNTING | recessed (ceiling, wall) |
| NOTES | other RAL on request |

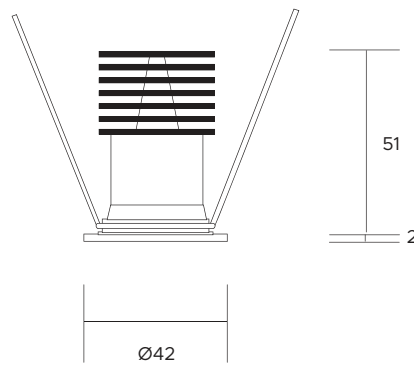

Ø 37mm



| POWER SUPPLY | max 3W - max 350mA | | | | | | | | | | | | |
|-------------------------------|---|-----|----------|---|---|--|--|--|--|-----|-----|-----|----------|
| CODE | AV02075GN | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber | | | | | | | | | | | | |
| OPTICS | <table border="1"> <thead> <tr> <th>N</th> <th>M</th> <th>W</th> <th>E</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>30°</td> <td>40° x17°</td> </tr> </tbody> </table> | N | M | W | E | | | | | 15° | 25° | 30° | 40° x17° |
| N | M | W | E | | | | | | | | | | |
| | | | | | | | | | | | | | |
| 15° | 25° | 30° | 40° x17° | | | | | | | | | | |
| FINISHES | W - White G - Grey B - Black | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 330lm (3000°K, 350mA) | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 250lm (3000°K, 350mA, 30°) | | | | | | | | | | | | |
| LED NUMBER | 3 power LEDs | | | | | | | | | | | | |
| MATERIAL | body in anodized aluminium, flange in painted aluminium | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | |
| POWER CABLE | includes 0,5 mt FEP 2 x 0,35 cable | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | |
| MOUNTING | recessed (ceiling, wall) | | | | | | | | | | | | |
| NOTES | other RAL on request | | | | | | | | | | | | |

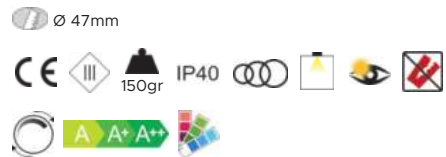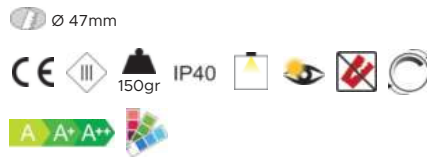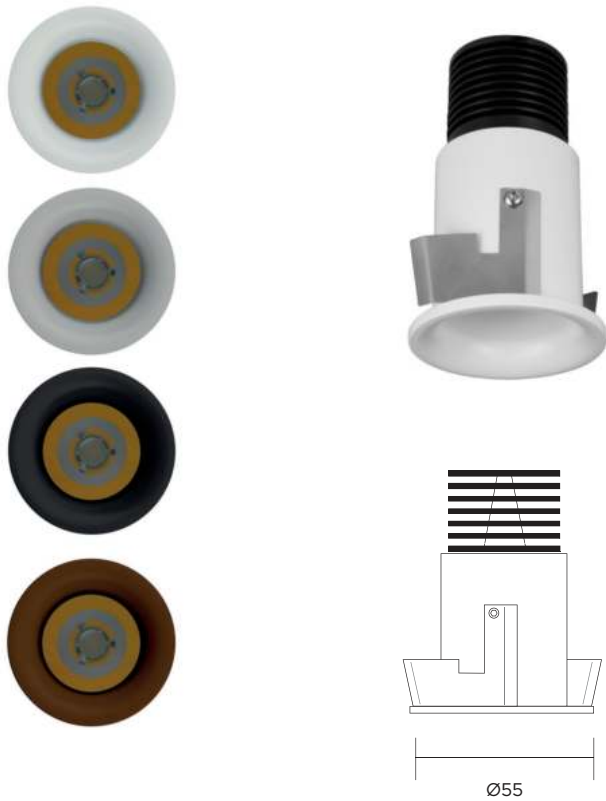


| | |
|------------------------------|--|
| POWER SUPPLY | max 3W - max 700mA |
| CODE | AV02076GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K |
| OPTICS | S |
| FINISHES | W - White G - Grey B - Black K - Corten |
| LUMEN OUTPUT SOURCE | 190lm (3000°K, 700mA) |
| DELIVERD LUMEN OUTPUT | 130lm (3000°K, 700mA, 3°) |
| LED NUMBER | 1 power LED |
| MATERIAL | body in anodized aluminium, flange in painted aluminium |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Liyy 2 x 0,50 cable |
| WIRING | in series |
| MOUNTING | recessed (ceiling) |
| NOTES | other RAL on request |

| | |
|------------------------------|--|
| POWER SUPPLY | max 6W - max 700mA |
| CODE | AV02311GN |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K |
| OPTICS | N M W |
| FINISHES | W - White G - Grey B - Black K - Corten |
| LUMEN OUTPUT SOURCE | 800lm (3000°K, 700mA) |
| DELIVERD LUMEN OUTPUT | 430lm (3000°K, 700mA, 25°) |
| LED NUMBER | 1 power LED multichip |
| MATERIAL | body in anodized aluminium, flange in painted aluminium |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Liyy 2 x 0,50 cable |
| WIRING | in series |
| MOUNTING | recessed (ceiling) |
| NOTES | other RAL on request |




Appliques




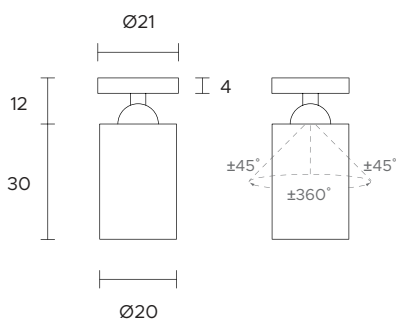

| | | | | | | | | | | | | | | | | |
|-------------------------------|--|-----|-----|---------|---|---|--|--|--|--|--|-----|-----|-----|-----|---------|
| POWER SUPPLY | max 2W - max 500mA | | | | | | | | | | | | | | | |
| CODES | AV02186GN, AV02183GN, AV02187GN, AV02188GN | | | | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber | | | | | | | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>25°x45°</td> </tr> </table> | N | M | W | X | E | | | | | | 15° | 25° | 40° | 60° | 25°x45° |
| N | M | W | X | E | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| 15° | 25° | 40° | 60° | 25°x45° | | | | | | | | | | | | |
| FINISHES | G - Grey B - Black | | | | | | | | | | | | | | | |
| FIXING OPTIONS | 1 - Applique 2 - Springs 3 - Ring Nut 4 - Magnetic | | | | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 150lm (3000°K, 500mA) | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 145lm (3000°K, 500mA, 40°) | | | | | | | | | | | | | | | |
| LED NUMBER | 1 power LED | | | | | | | | | | | | | | | |
| MATERIAL | body and flange in anodized aluminium | | | | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | | | | |
| POWER CABLE | includes 0,5 mt FEP 2 x 0,35 cable | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | |
| MOUNTING | recessed or surface (ceiling, wall, bottom up) | | | | | | | | | | | | | | | |
| NOTES | other finishes on request | | | | | | | | | | | | | | | |

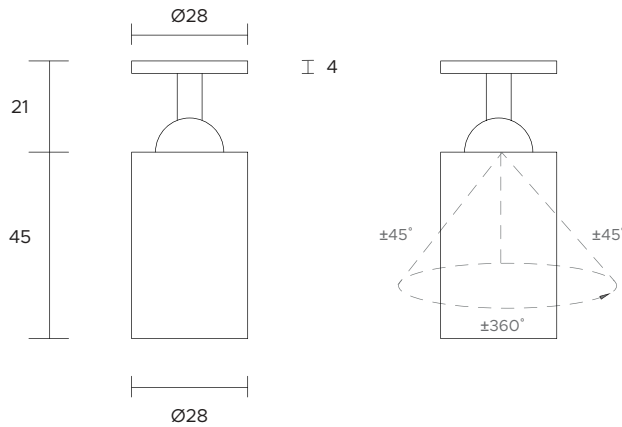

| | | | | | | | | | | | | | |
|-------------------------------|--|-----|---------|---|---|--|--|--|--|-----|-----|-----|---------|
| POWER SUPPLY CODES | max 3W - max 350mA AV02315GN, AV02181GN, AV02316GN, AV02317GN | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber | | | | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>30°</td> <td>40°x17°</td> </tr> </table> | N | M | W | E | | | | | 15° | 25° | 30° | 40°x17° |
| N | M | W | E | | | | | | | | | | |
| | | | | | | | | | | | | | |
| 15° | 25° | 30° | 40°x17° | | | | | | | | | | |
| FINISHES | G B Grey - Black | | | | | | | | | | | | |
| FIXING OPTIONS | 1 - Applique 2 - Springs 3 - Ring Nut 4 -Magnetic | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 330lm (3000°K, 350mA) | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 250lm (3000°K, 350mA, 30°) | | | | | | | | | | | | |
| LED NUMBER | 3 power LEDs | | | | | | | | | | | | |
| MATERIAL | body and flange in anodized aluminium | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | |
| POWER CABLE | includes 0,5 mt FEP cable 2 x 0,35 | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | |
| MOUNTING | recessed or surface (ceiling, wall, bottom up) | | | | | | | | | | | | |
| NOTES | other finishes on request | | | | | | | | | | | | |

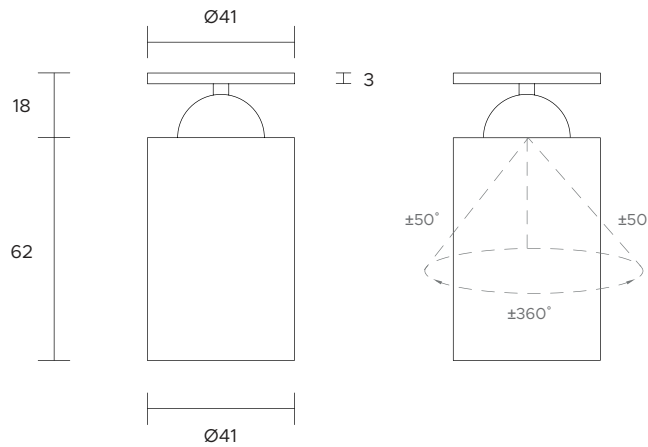

1 - Applique
AV02192GN 3W
AV02318GN 6W





2 - Springs
AV02185GN 3W
AV02314GN 6W



3 - Ring Nut
AV02185GN 3W
AV02319GN 6W



4 - Magnetic
AV02185GN 3W
AV02320GN 6W




| | |
|-------------------------------|--|
| POWER SUPPLY CODES | max 3W - max 700mA AV02192GN, AV02185GN, AV02185GN, AV02185GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K |
| OPTICS | S 3° |
| FINISHES | G - Grey B - Black |
| FIXING OPTIONS | 1 - Applique 2 - Springs 3 - Ring Nut 4 - Magnetic |
| LUMEN OUTPUT SOURCE | 190lm (3000°K, 700mA) |
| DELIVERED LUMEN OUTPUT | 130lm (3000°K, 700mA, 3°) |
| LED NUMBER | 1 power LED |
| MATERIAL | body and flange in anodized aluminium |
| DRIVER | not included |
| POWER CABLE | includes 0,5 mt FEP 2 x 0,35 cable |
| WIRING | in series |
| MOUNTING | recessed or surface (ceiling, wall, bottom up) |
| NOTES | other finishes on request |

| | |
|-------------------------------|--|
| POWER SUPPLY CODES | max 6W - max 700mA AV02318GN, AV02314GN, AV02319GN, AV02320GN |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K |
| OPTICS | N M W 15° 25° 40° |
| FINISHES | G - Grey B - Black |
| FIXING OPTIONS | 1 - Applique 2 - Springs 3 - Ring Nut 4 - Magnetic |
| LUMEN OUTPUT SOURCE | 800lm (3000°K, 700mA) |
| DELIVERED LUMEN OUTPUT | 430lm (3000°K, 700mA, 25°) |
| LED NUMBER | 1 power LED multichip |
| MATERIAL | body and flange in anodized aluminium |
| DRIVER | not included |
| POWER CABLE | includes 0,5 mt FEP 2 x 0,35 cable |
| WIRING | in series |
| MOUNTING | recessed or surface (ceiling, wall, bottom up) |
| NOTES | other finishes on request |




Paletti

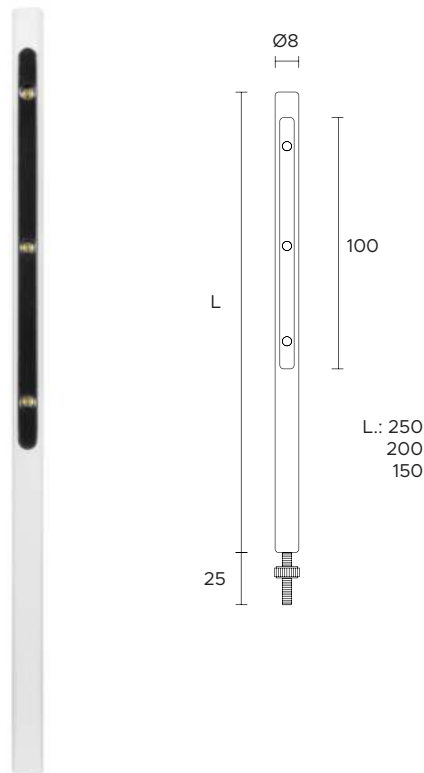

Ø 5mm




| | |
|-------------------------------|---|
| POWER SUPPLY | max 3W - max 350mA |
| CODES | AVO2207GN, AVO2208GN, AVO2209GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber |
| OPTICS | E 90°x120° |
| FINISHES | W - White G - Grey B - Black |
| STEM LENGHT | 1 - 150mm Code: AVO2207GN 2 - 200mm Code: AVO2208GN 3 - 250mm Code: AVO2209GN |
| LUMEN OUTPUT SOURCE | 330lm (3000°K, 350mA) |
| DELIVERED LUMEN OUTPUT | 180lm (3000°K, 350mA, 90°x120°) |
| LED NUMBER | 3 power LEDs |
| MATERIAL | body in anodized or painted aluminium |
| DRIVER | not included |
| POWER CABLE | includes 0,5 mt FEP 2 x 0,35 cable |
| WIRING | in series |
| MOUNTING | surface (ceiling, wall, bottom up) |
| ACCESSORIES | Fixing washer Ø15x2,5 |
| NOTES | other RAL on request |

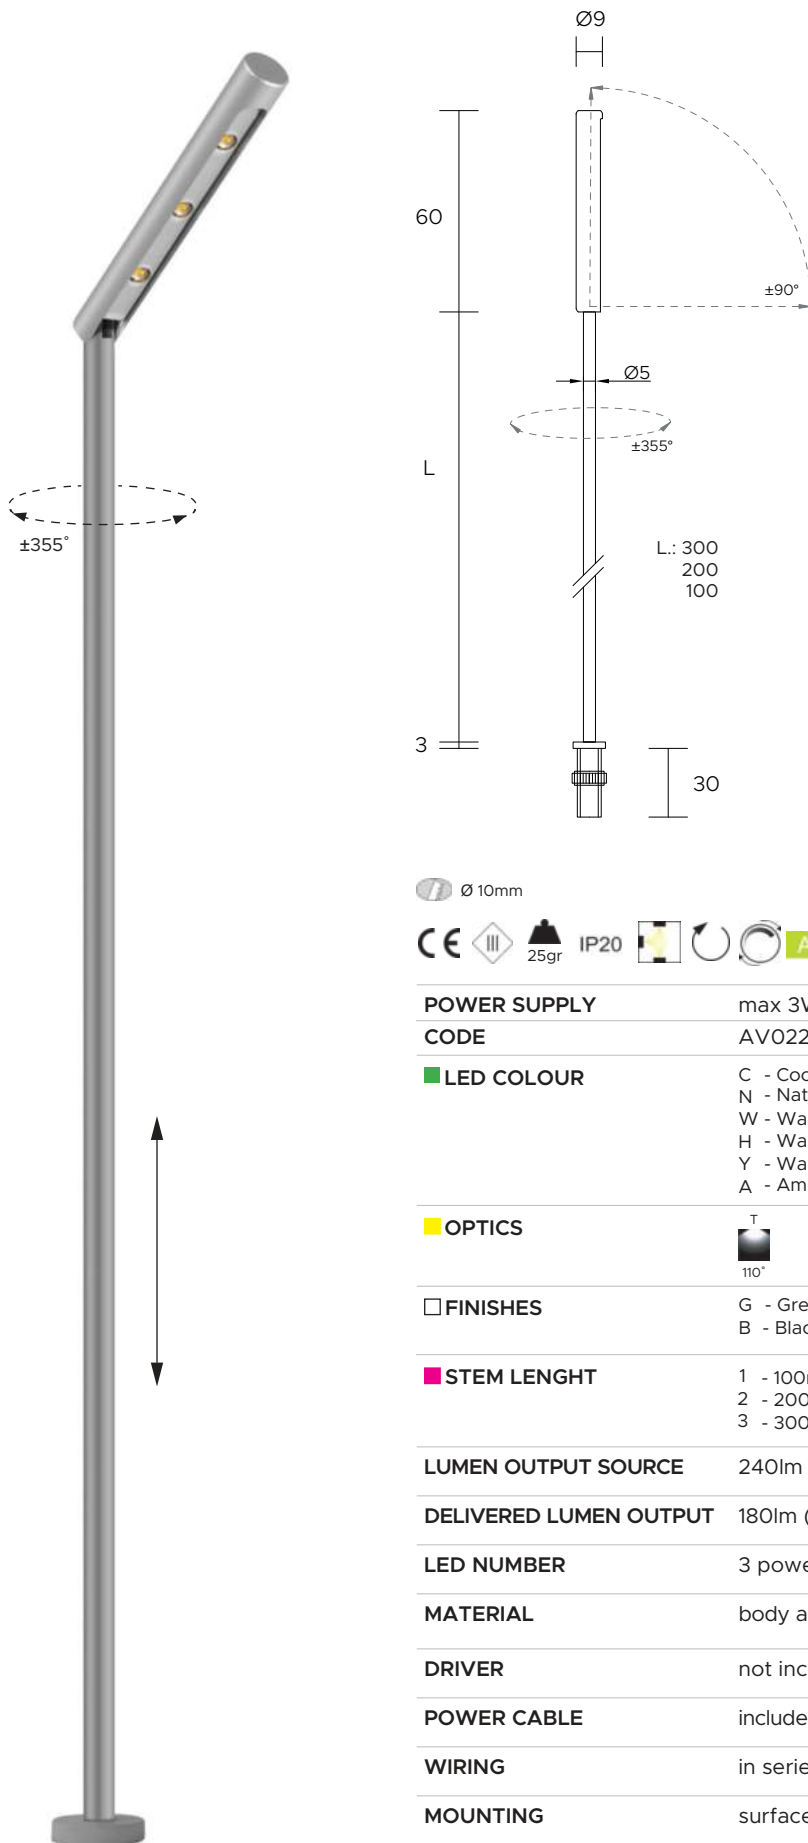

Ø 10mm





| | |
|-------------------------------|---|
| POWER SUPPLY | max 3W - max 250mA |
| CODE | AV02215GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber |
| OPTICS | T 110° |
| FINISHES | G - Grey B - Black |
| STEM LENGHT | 1 - 100mm 2 - 200mm 3 - 300mm |
| LUMEN OUTPUT SOURCE | 240lm (3000°K, 250mA) |
| DELIVERED LUMEN OUTPUT | 180lm (3000°K, 250mA, 110°) |
| LED NUMBER | 3 power LEDs |
| MATERIAL | body and stem in anodized aluminium |
| DRIVER | not included |
| POWER CABLE | includes 0,5 mt FEP 2 x 0,35 cable |
| WIRING | in series |
| MOUNTING | surface (ceiling, wall, bottom up) |
| NOTES | other finishes on request |

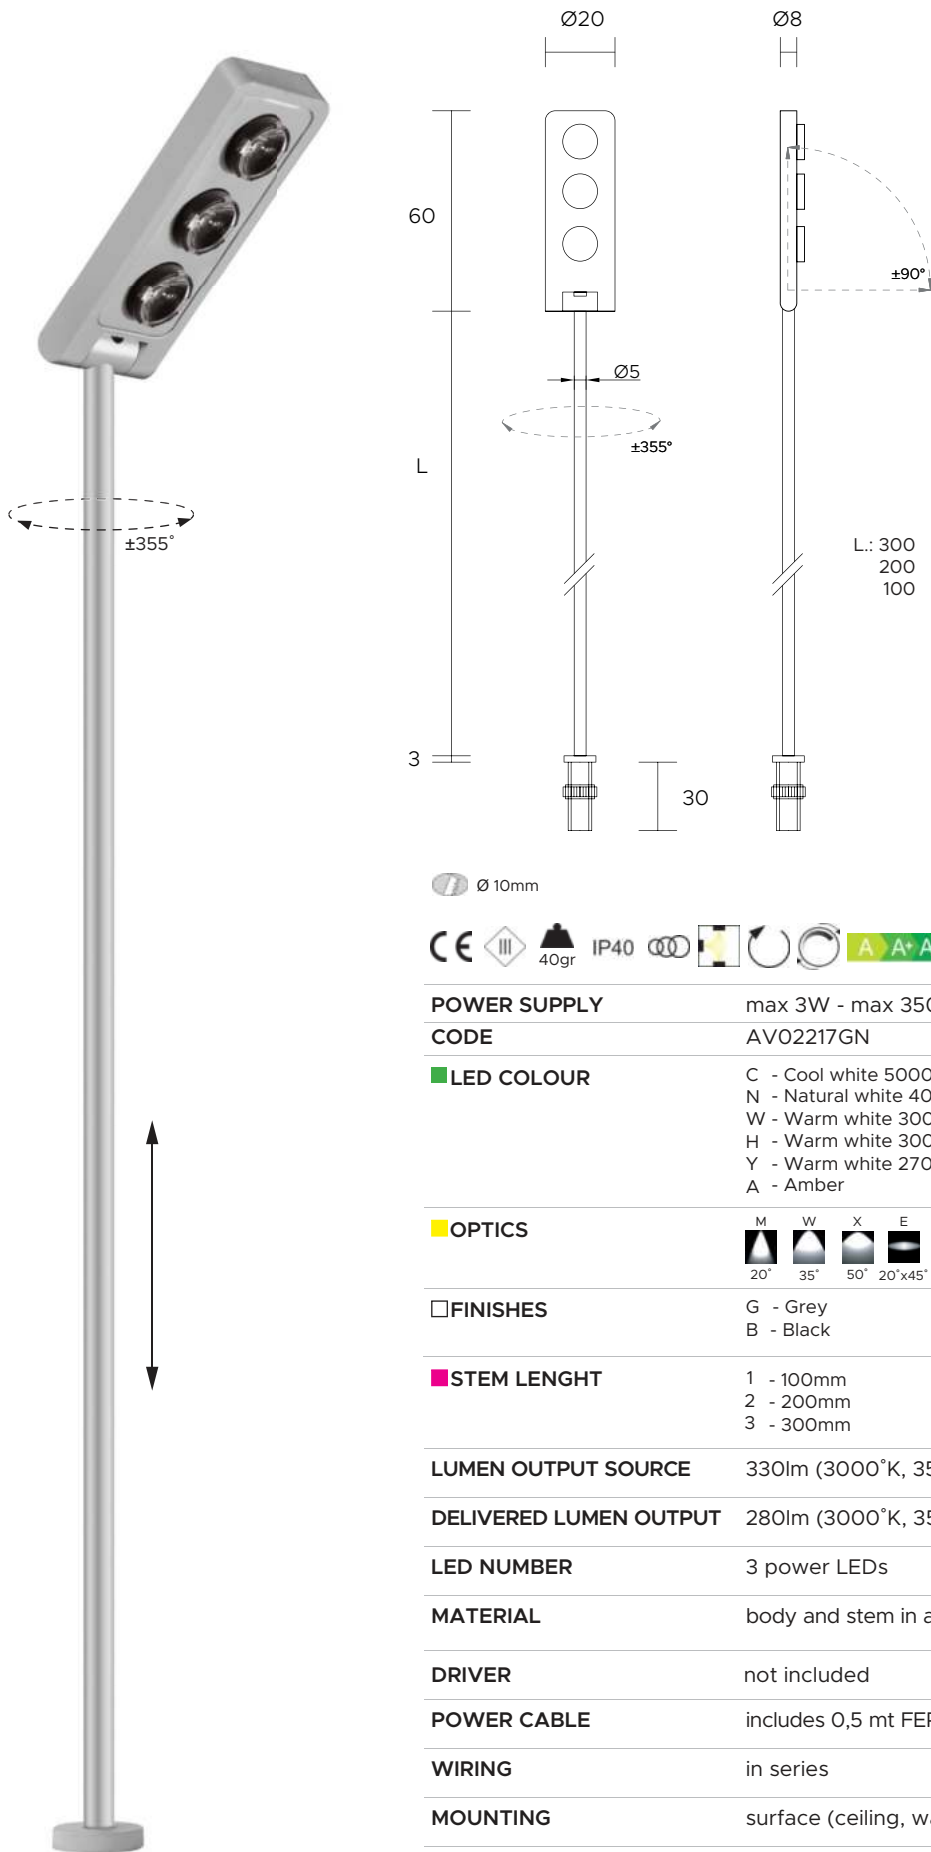



Ø 10mm



| | |
|-------------------------------|---|
| POWER SUPPLY | max 3W - max 350mA |
| CODE | AV02217GN |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber |
| OPTICS | M 20° W 35° X 50° E 20°x45° |
| FINISHES | G - Grey B - Black |
| STEM LENGHT | 1 - 100mm 2 - 200mm 3 - 300mm |
| LUMEN OUTPUT SOURCE | 330lm (3000°K, 350mA) |
| DELIVERED LUMEN OUTPUT | 280lm (3000°K, 350mA, 50°) |
| LED NUMBER | 3 power LEDs |
| MATERIAL | body and stem in anodized aluminium |
| DRIVER | not included |
| POWER CABLE | includes 0,5 mt FEP 2 x 0,35 cable |
| WIRING | in series |
| MOUNTING | surface (ceiling, wall, bottom up) |
| NOTES | other finishes on request |

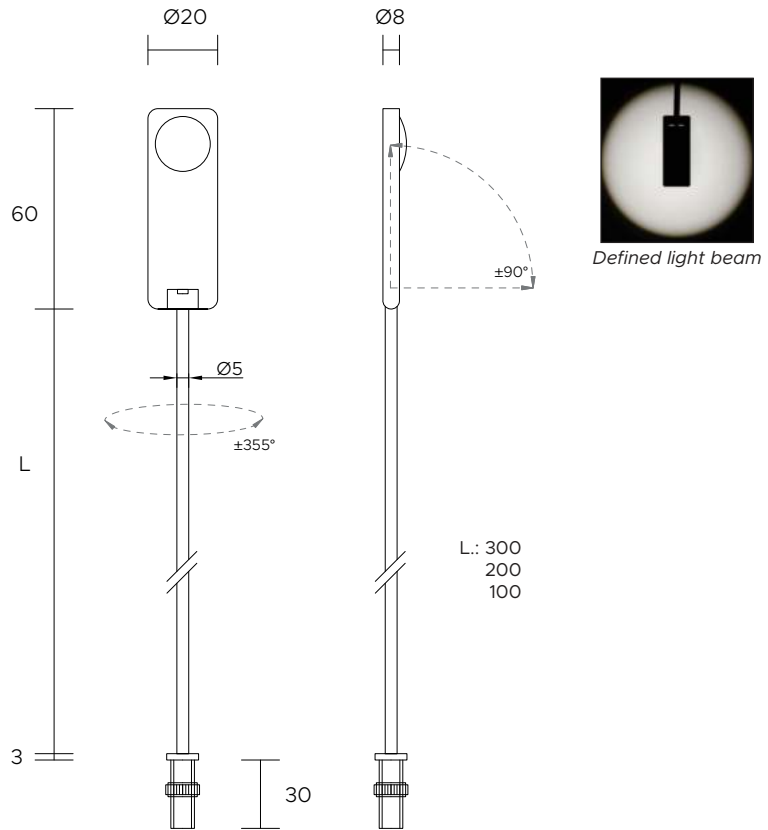


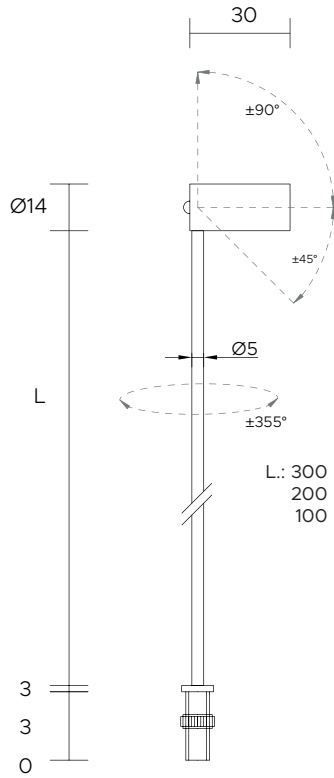
| | |
|-------------------------------|--|
| POWER SUPPLY | max 4W - max 350mA |
| CODE | AV02219GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K |
| OPTICS | X  70° |
| FINISHES | G - Grey B - Black |
| STEM LENGHT | 1 - 100mm 2 - 200mm 3 - 300mm |
| LUMEN OUTPUT SOURCE | 400lm (3000°K, 350mA) |
| DELIVERED LUMEN OUTPUT | 300lm (3000°K, 350mA, 70°) |
| LED NUMBER | 1 power LED multichip |
| MATERIAL | body and stem in anodized aluminium |
| DRIVER | not included |
| POWER CABLE | includes 0,5 mt FEP 2 x 0,35 cable |
| WIRING | in series |
| MOUNTING | surface (ceiling, wall, bottom up) |
| NOTES | other finishes on request |

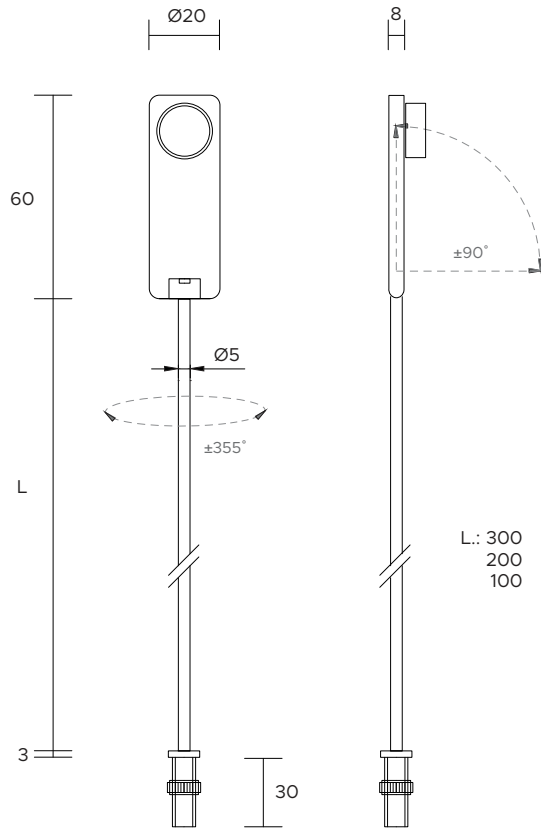

Ø 10mm




| | |
|-------------------------------|--|
| POWER SUPPLY | max 4W - max 350mA |
| CODE | AV02277GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CR190 Y - Warm white 2700°K |
| OPTICS | X  60° |
| FINISHES | G - Grey B - Black |
| STEM LENGHT | 1 - 100mm 2 - 200mm 3 - 300mm |
| LUMEN OUTPUT SOURCE | 400lm (3000°K, 350mA) |
| DELIVERED LUMEN OUTPUT | 220lm (3000°K, 350mA, 60°) |
| LED NUMBER | 1 power LED multichip |
| MATERIAL | body and stem in anodized aluminium |
| DRIVER | not included |
| POWER CABLE | includes 0,5 mt FEP 2 x 0,35 cable |
| WIRING | in series |
| MOUNTING | surface (ceiling, wall, bottom up) |
| NOTES | other finishes on request |



Ø 10mm




| | |
|-------------------------------|---|
| POWER SUPPLY | max 2W - max 500mA |
| CODE | AV02220GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber |
| OPTICS | M 20° W 35° X 50° E 20°x45° |
| FINISHES | G - Grey B - Black |
| STEM LENGHT | 1 - 100mm 2 - 200mm 3 - 300mm |
| LUMEN OUTPUT SOURCE | 150lm (3000°K, 500mA) |
| DELIVERED LUMEN OUTPUT | 140lm (3000°K, 500mA, 50°) |
| LED NUMBER | 1 power LED |
| MATERIAL | body and stem in anodized aluminium |
| DRIVER | not included |
| POWER CABLE | includes 0,5 mt FEP 2 x 0,35 cable |
| WIRING | in series |
| MOUNTING | surface (ceiling, wall, bottom up) |
| NOTES | other finishes on request |

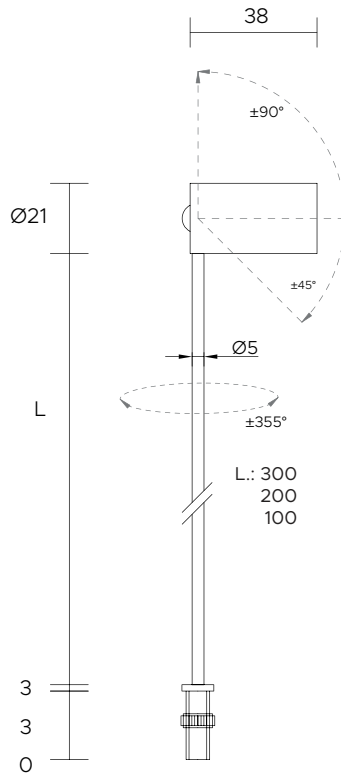

Ø 10mm




| | | | | | | | | | | | | | | | | |
|-------------------------------|--|-----|-----|---------|---|---|--|--|--|--|--|-----|-----|-----|-----|---------|
| POWER SUPPLY | max 2W - max 500mA | | | | | | | | | | | | | | | |
| CODE | AV02221GN | | | | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber | | | | | | | | | | | | | | | |
| OPTICS | <table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>25°x45°</td> </tr> </table> | N | M | W | X | E | | | | | | 15° | 25° | 40° | 60° | 25°x45° |
| N | M | W | X | E | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| 15° | 25° | 40° | 60° | 25°x45° | | | | | | | | | | | | |
| FINISHES | G - Grey B - Black | | | | | | | | | | | | | | | |
| STEM LENGHT | 1 - 100mm 2 - 200mm 3 - 300mm | | | | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 150lm (3000°K, 500mA) | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 145lm (3000°K, 500mA, 40°) | | | | | | | | | | | | | | | |
| LED NUMBER | 1 power LED | | | | | | | | | | | | | | | |
| MATERIAL | body and stem in anodized aluminium | | | | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | | | | |
| POWER CABLE | includes 0,5 mt FEP 2 x 0,35 cable | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | |
| MOUNTING | surface (ceiling, wall, bottom up) | | | | | | | | | | | | | | | |
| NOTES | other finishes on request | | | | | | | | | | | | | | | |

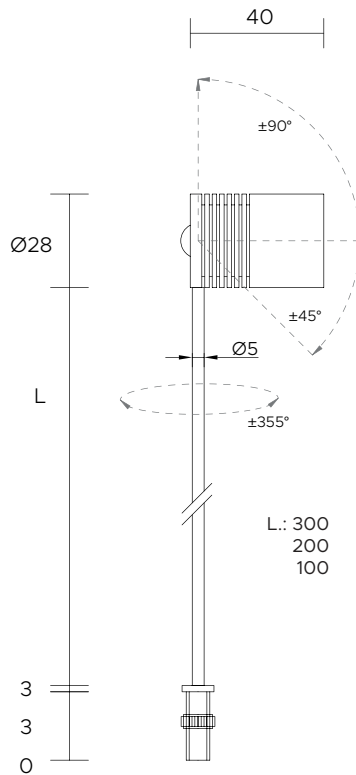

Ø 10mm



| | | | | | | | | | | | | | |
|-------------------------------|--|-----|---------|---|---|--|--|--|--|-----|-----|-----|---------|
| POWER SUPPLY | max 3W - max 350mA | | | | | | | | | | | | |
| CODE | AV02222GN | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber | | | | | | | | | | | | |
| OPTICS | <table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>30°</td> <td>40°x17°</td> </tr> </table> | N | M | W | E | | | | | 15° | 25° | 30° | 40°x17° |
| N | M | W | E | | | | | | | | | | |
| | | | | | | | | | | | | | |
| 15° | 25° | 30° | 40°x17° | | | | | | | | | | |
| FINISHES | G - Grey B - Black | | | | | | | | | | | | |
| STEM LENGHT | 1 - 100mm 2 - 200mm 3 - 300mm | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 330lm (3000°K, 350mA) | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 250lm (3000°K, 350mA, 30°) | | | | | | | | | | | | |
| LED NUMBER | 3 power LEDs | | | | | | | | | | | | |
| MATERIAL | body and stem in anodized aluminium | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | |
| POWER CABLE | includes 0,5 mt FEP 2 x 0,35 cable | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | |
| MOUNTING | surface (ceiling, wall, bottom up) | | | | | | | | | | | | |
| NOTES | other finishes on request | | | | | | | | | | | | |

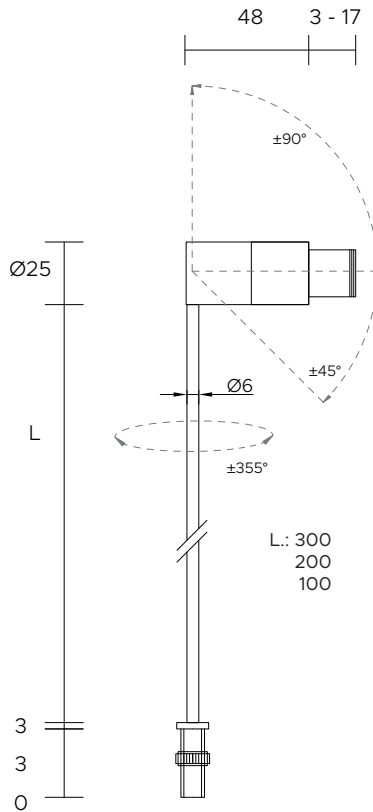


Joy Zoom optic is focusable from 8° to 45°

Ø 12mm



| | |
|-------------------------------|--|
| POWER SUPPLY | max 4W - max 350mA |
| CODE | AV02223GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K |
| OPTICS | 8° > 45° |
| FINISHES | B - Black |
| STEM LENGHT | 1 - 100mm 2 - 200mm 3 - 300mm |
| LUMEN OUTPUT SOURCE | 400lm (3000°K, 350mA) |
| DELIVERED LUMEN OUTPUT | 300lm (3000°K, 350mA) |
| LED NUMBER | 1 power LED multichip |
| MATERIAL | body and stem in anodized aluminium |
| DRIVER | not included |
| POWER CABLE | includes 0,5 mt FEP 2 x 0,35 cable |
| WIRING | in series |
| MOUNTING | surface (ceiling, wall, bottom up) |
| NOTES | other finishes on request |

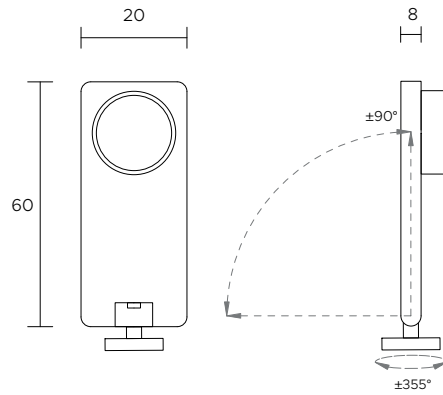


Ø 10mm



| | |
|-------------------------------|--|
| POWER SUPPLY | max 4W - max 350mA |
| CODE | AV02278GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K |
| OPTICS | x 60° |
| FINISHES | G - Grey B - Black |
| LUMEN OUTPUT SOURCE | 400lm (3000°K, 350mA) |
| DELIVERED LUMEN OUTPUT | 220lm (3000°K, 350mA, 60°) |
| LED NUMBER | 1 power LED multichip |
| MATERIAL | body in anodized aluminium |
| DRIVER | not included |
| POWER CABLE | includes 0,5 mt FEP 2 x 0,35 cable |
| WIRING | in series |
| MOUNTING | surface (ceiling, wall, bottom up) |
| NOTES | other finishes on request |




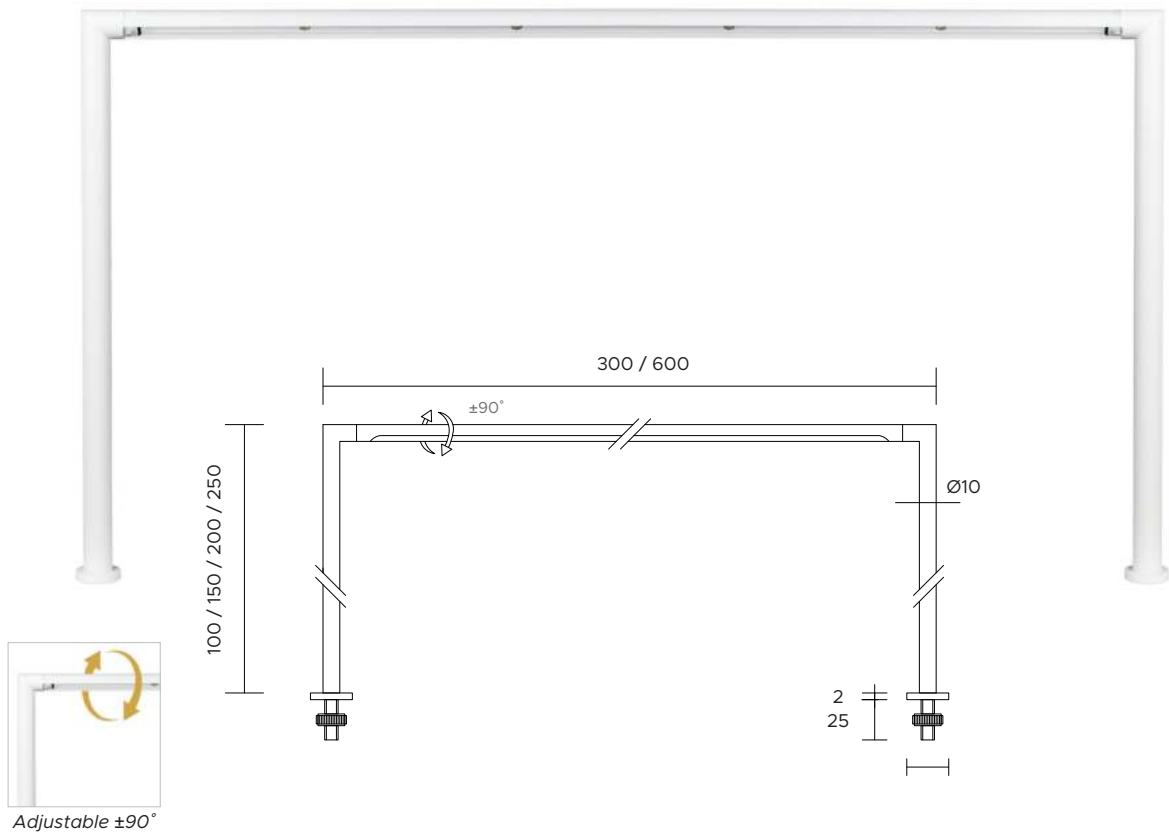


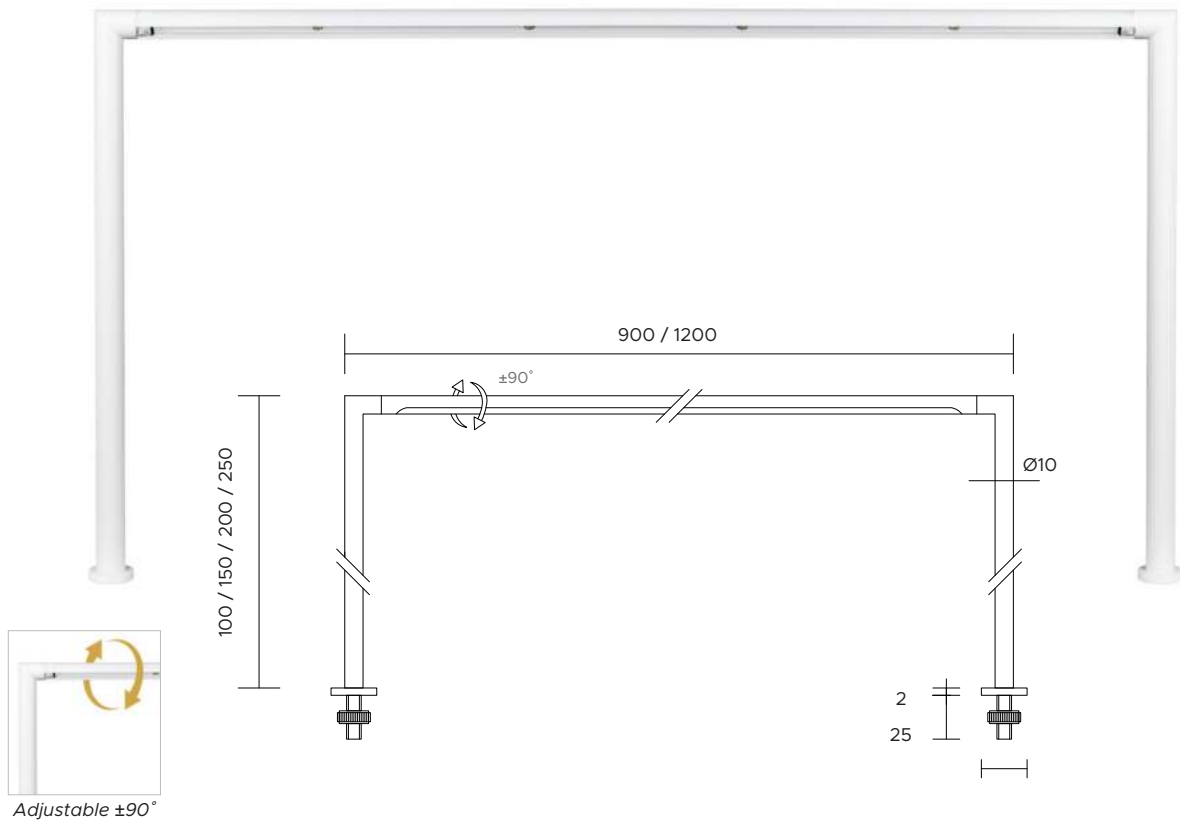
Adjustable $\pm 90^\circ$

Ø 9mm



| | |
|-------------------------------|--|
| POWER SUPPLY | max 4W - max 350mA |
| CODE | AV02232GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K |
| OPTICS |  110° |
| FINISHES | w - White G - Grey B - Black |
| STEM LENGHT | 1 - 100mm 2 - 150mm 3 - 200mm 4 - 250mm |
| LUMEN OUTPUT SOURCE | 440lm (3000°K, 350mA) |
| DELIVERED LUMEN OUTPUT | 410lm (3000°K, 350mA, 110°) |
| LED NUMBER | 4 power LEDs |
| MATERIAL | body in painted aluminium |
| DRIVER | not included |
| POWER CABLE | includes 0,5 mt FEP 2 x 0,35 cable |
| WIRING | in series |
| MOUNTING | surface (floor fixing) |
| NOTES | other RAL on request, customizable sizes on request |

| |
|--|
| max 8W - max 350mA |
| AV02291GN |
| C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K |
|  110° |
| w - White G - Grey B - Black |
| 1 - 100mm 2 - 150mm 3 - 200mm 4 - 250mm |
| 880lm (3000°K, 350mA) |
| 820lm (3000°K, 350mA, 110°) |
| 8 power LEDs |
| body in painted aluminium |
| not included |
| includes 0,5 mt FEP 2 x 0,35 cable |
| in series |
| surface (floor fixing) |
| other RAL on request, customizable sizes on request |




Adjustable $\pm 90^\circ$

Ø9 mm




| | |
|-------------------------------|--|
| POWER SUPPLY | max 12W - max 350mA |
| CODE | AV02321GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K |
| OPTICS | 110° |
| FINISHES | w - White G - Grey B - Black |
| STEM LENGTH | 1 - 100mm 2 - 150mm 3 - 200mm 4 - 250mm |
| LUMEN OUTPUT SOURCE | 1320lm (3000°K, 350mA) |
| DELIVERED LUMEN OUTPUT | 1230lm (3000°K, 350mA, 110°) |
| LED NUMBER | 12 power LEDs |
| MATERIAL | body in painted aluminium |
| DRIVER | not included |
| POWER CABLE | includes 0,5 mt FEP 2 x 0,35 cable |
| WIRING | in series |
| MOUNTING | surface (floor fixing) |
| NOTES | other RAL on request, customizable sizes on request |

| | |
|-------------------------------|--|
| POWER SUPPLY | max 16W - max 350mA |
| CODE | AV02322GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K |
| OPTICS | 110° |
| FINISHES | w - White G - Grey B - Black |
| STEM LENGTH | 1 - 100mm 2 - 150mm 3 - 200mm 4 - 250mm |
| LUMEN OUTPUT SOURCE | 1760lm (3000°K, 350mA) |
| DELIVERED LUMEN OUTPUT | 1640lm (3000°K, 350mA, 110°) |
| LED NUMBER | 16 power LEDs |
| MATERIAL | body in painted aluminium |
| DRIVER | not included |
| POWER CABLE | includes 0,5 mt FEP 2 x 0,35 cable |
| WIRING | in series |
| MOUNTING | surface (floor fixing) |
| NOTES | other RAL on request, customizable sizes on request |



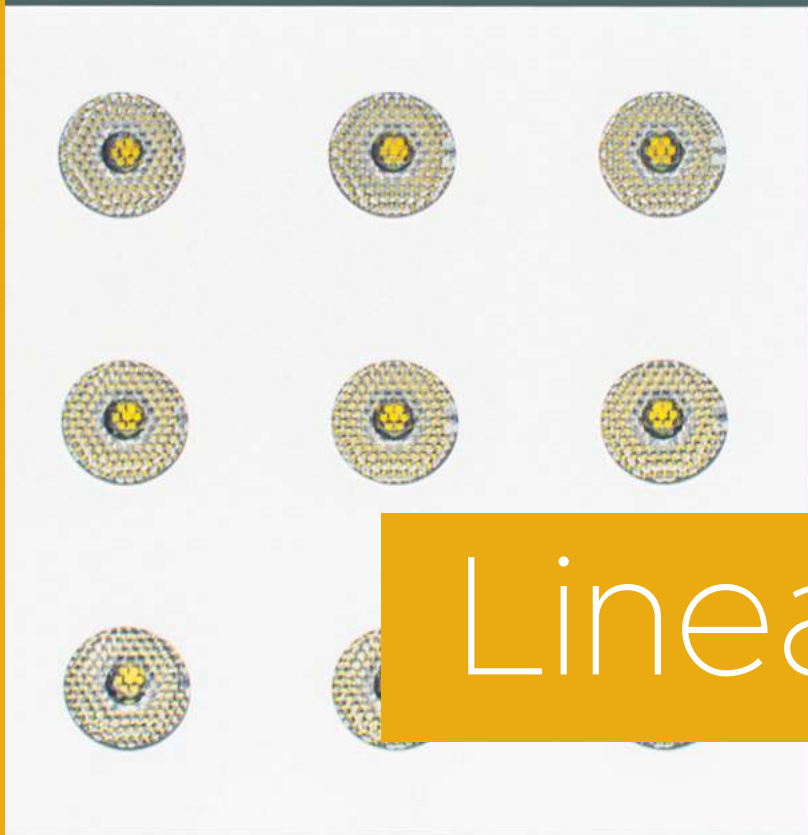


Linear lights

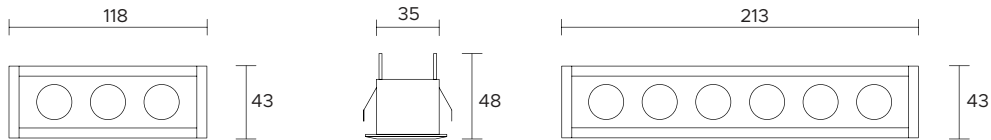

| | | | | | | | | | | | | | | | | |
|-------------------------------|--|-----|-----|---------|---|---|--|--|--|--|--|-----|-----|-----|-----|---------|
| POWER SUPPLY | max 6W - max 500mA | | | | | | | | | | | | | | | |
| CODE | AV02248GN | | | | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber | | | | | | | | | | | | | | | |
| FINISHES | W - White G - Grey B - Black | | | | | | | | | | | | | | | |
| OPTICS | <table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>30°x65°</td> </tr> </table> | N | M | W | X | E | | | | | | 10° | 25° | 40° | 60° | 30°x65° |
| N | M | W | X | E | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | 30°x65° | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 450lm (3000°K, 500mA) | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 420lm (3000°K, 500mA, 40°) | | | | | | | | | | | | | | | |
| LED NUMBER | 3 power LEDs | | | | | | | | | | | | | | | |
| MATERIAL | anodized or painted aluminium | | | | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | | | | |
| POWER CABLE | includes 0,5 mt Liyy 2 x 0,50 cable | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | |
| MOUNTING | recessed (ceiling, wall) | | | | | | | | | | | | | | | |
| NOTES | other RAL on request | | | | | | | | | | | | | | | |

| | | | | | | | | | | | | | | | | |
|-------------------------------|--|-----|-----|---------|---|---|--|--|--|--|--|-----|-----|-----|-----|---------|
| POWER SUPPLY | max 12W - max 500mA | | | | | | | | | | | | | | | |
| CODE | AV02249GN | | | | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber | | | | | | | | | | | | | | | |
| FINISHES | W - White G - Grey B - Black | | | | | | | | | | | | | | | |
| OPTICS | <table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>30°x65°</td> </tr> </table> | N | M | W | X | E | | | | | | 10° | 25° | 40° | 60° | 30°x65° |
| N | M | W | X | E | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | 30°x65° | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 900lm (3000°K, 500mA) | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 860lm (3000°K, 500mA, 40°) | | | | | | | | | | | | | | | |
| LED NUMBER | 6 power LEDs | | | | | | | | | | | | | | | |
| MATERIAL | anodized or painted aluminium | | | | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | | | | |
| POWER CABLE | includes 0,5 mt Liyy 2 x 0,50 cable | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | |
| MOUNTING | recessed (ceiling, wall) | | | | | | | | | | | | | | | |
| NOTES | other RAL on request | | | | | | | | | | | | | | | |

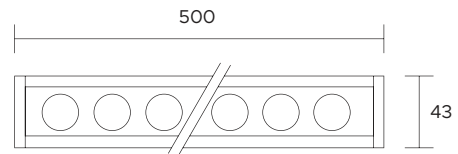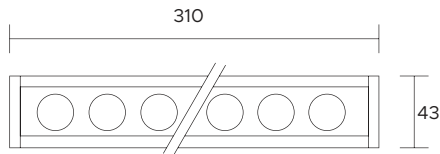

36x304 mm




| | | | | | | | | | | | | | | | | |
|-------------------------------|--|-----|-----|---------|---|---|--|--|--|--|--|-----|-----|-----|-----|---------|
| POWER SUPPLY | max 18W - max 500mA | | | | | | | | | | | | | | | |
| CODE | AV02250GN | | | | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber | | | | | | | | | | | | | | | |
| FINISHES | W - White G - Grey B - Black | | | | | | | | | | | | | | | |
| OPTICS | <table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>30°x65°</td> </tr> </table> | N | M | W | X | E | | | | | | 10° | 25° | 40° | 60° | 30°x65° |
| N | M | W | X | E | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | 30°x65° | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 1350lm (3000°K, 500mA) | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 1300lm (3000°K, 500mA, 40°) | | | | | | | | | | | | | | | |
| LED NUMBER | 9 power LEDs | | | | | | | | | | | | | | | |
| MATERIAL | anodized or painted aluminium | | | | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | | | | |
| POWER CABLE | includes 0,5 mt Liyy 2 x 0,50 cable | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | |
| MOUNTING | recessed (ceiling, wall) | | | | | | | | | | | | | | | |
| NOTES | other RAL on request | | | | | | | | | | | | | | | |

36x494 mm




| | | | | | | | | | | | | | | | | |
|-------------------------------|--|-----|-----|---------|---|---|--|--|--|--|--|-----|-----|-----|-----|---------|
| POWER SUPPLY | max 30W - max 500mA | | | | | | | | | | | | | | | |
| CODE | AV02251GN | | | | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber | | | | | | | | | | | | | | | |
| FINISHES | W - White G - Grey B - Black | | | | | | | | | | | | | | | |
| OPTICS | <table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>30°x65°</td> </tr> </table> | N | M | W | X | E | | | | | | 10° | 25° | 40° | 60° | 30°x65° |
| N | M | W | X | E | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | 30°x65° | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 2250lm (3000°K, 500mA) | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 1720lm (3000°K, 500mA, 40°) | | | | | | | | | | | | | | | |
| LED NUMBER | 15 power LEDs | | | | | | | | | | | | | | | |
| MATERIAL | anodized or painted aluminium | | | | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | | | | |
| POWER CABLE | includes 0,5 mt Liyy 2 x 0,50 cable | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | |
| MOUNTING | recessed (ceiling, wall) | | | | | | | | | | | | | | | |
| NOTES | other RAL on request | | | | | | | | | | | | | | | |

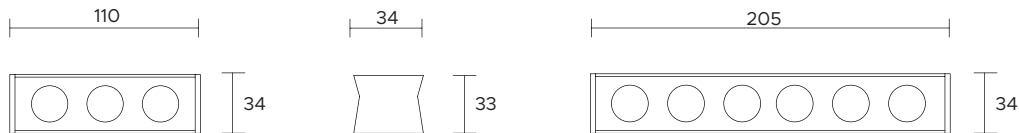

| | | | | | | | | | | | | | | | | |
|-------------------------------|--|-----|-----|---------|---|---|--|--|--|--|--|-----|-----|-----|-----|---------|
| POWER SUPPLY | max 3W - max 350mA | | | | | | | | | | | | | | | |
| CODE | AVO2254GN | | | | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber | | | | | | | | | | | | | | | |
| FINISHES | W - White G - Grey B - Black | | | | | | | | | | | | | | | |
| OPTICS | <table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>30°x65°</td> </tr> </table> | N | M | W | X | E | | | | | | 10° | 25° | 40° | 60° | 30°x65° |
| N | M | W | X | E | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | 30°x65° | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 330lm (3000°K, 350mA) | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 320lm (3000°K, 350mA, 40°) | | | | | | | | | | | | | | | |
| LED NUMBER | 3 power LEDs | | | | | | | | | | | | | | | |
| MATERIAL | anodized or painted aluminium | | | | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | | | | |
| POWER CABLE | includes 0,5 mt Liyy 2 x 0,50 cable | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | |
| MOUNTING | surface (ceiling, wall) | | | | | | | | | | | | | | | |
| NOTES | other RAL on request | | | | | | | | | | | | | | | |

| | | | | | | | | | | | | | | | | |
|-------------------------------|--|-----|-----|---------|---|---|--|--|--|--|--|-----|-----|-----|-----|---------|
| POWER SUPPLY | max 6W - max 350mA | | | | | | | | | | | | | | | |
| CODE | AVO2255GN | | | | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber | | | | | | | | | | | | | | | |
| FINISHES | W - White G - Grey B - Black | | | | | | | | | | | | | | | |
| OPTICS | <table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>30°x65°</td> </tr> </table> | N | M | W | X | E | | | | | | 10° | 25° | 40° | 60° | 30°x65° |
| N | M | W | X | E | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | 30°x65° | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 660lm (3000°K, 350mA) | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 640lm (3000°K, 350mA, 40°) | | | | | | | | | | | | | | | |
| LED NUMBER | 6 power LEDs | | | | | | | | | | | | | | | |
| MATERIAL | anodized or painted aluminium | | | | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | | | | |
| POWER CABLE | includes 0,5 mt Liyy 2 x 0,50 cable | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | |
| MOUNTING | surface (ceiling, wall) | | | | | | | | | | | | | | | |
| NOTES | other RAL on request | | | | | | | | | | | | | | | |

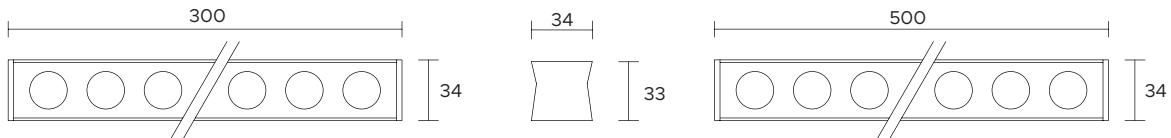

| | | | | | | | | | | | | | | | | |
|-------------------------------|--|-----|-----|---------|---|---|--|--|--|--|--|-----|-----|-----|-----|---------|
| POWER SUPPLY | max 9W - max 350mA | | | | | | | | | | | | | | | |
| CODE | AV02256GN | | | | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber | | | | | | | | | | | | | | | |
| FINISHES | W - White G - Grey B - Black | | | | | | | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>30°x65°</td> </tr> </table> | N | M | W | X | E | | | | | | 10° | 25° | 40° | 60° | 30°x65° |
| N | M | W | X | E | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | 30°x65° | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 990lm (3000°K, 350mA) | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 960lm (3000°K, 350mA, 40°) | | | | | | | | | | | | | | | |
| LED NUMBER | 9 power LEDs | | | | | | | | | | | | | | | |
| MATERIAL | anodized or painted aluminium | | | | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | | | | |
| POWER CABLE | includes 0,5 mt Liyy 2 x 0,50 cable | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | |
| MOUNTING | surface (ceiling, wall) | | | | | | | | | | | | | | | |
| NOTES | other RAL on request | | | | | | | | | | | | | | | |

| | | | | | | | | | | | | | | | | |
|-------------------------------|--|-----|-----|---------|---|---|--|--|--|--|--|-----|-----|-----|-----|---------|
| POWER SUPPLY | max 15W - max 350mA | | | | | | | | | | | | | | | |
| CODE | AV02257GN | | | | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber | | | | | | | | | | | | | | | |
| FINISHES | W - White G - Grey B - Black | | | | | | | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>30°x65°</td> </tr> </table> | N | M | W | X | E | | | | | | 10° | 25° | 40° | 60° | 30°x65° |
| N | M | W | X | E | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | 30°x65° | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 1650lm (3000°K, 350mA) | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 1600lm (3000°K, 350mA, 40°) | | | | | | | | | | | | | | | |
| LED NUMBER | 15 power LEDs | | | | | | | | | | | | | | | |
| MATERIAL | anodized or painted aluminium | | | | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | | | | |
| POWER CABLE | includes 0,5 mt Liyy 2 x 0,50 cable | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | |
| MOUNTING | surface (ceiling, wall) | | | | | | | | | | | | | | | |
| NOTES | other RAL on request | | | | | | | | | | | | | | | |





Indoor





Static Recessed
pag. 51



Static Recessed
pag. 52



Static Recessed
pag. 53



Static Recessed
pag. 54



Static Recessed
pag. 55



Static Recessed
pag. 56



Backward Optic Recessed
pag. 59



Backward Optic Recessed
pag. 60



Trimless Recessed
pag. 63



Trimless Recessed
pag. 64



Trimless Recessed
pag. 65



Trimless Recessed
pag. 66




Trimless Recessed
pag. 67



Trimless Recessed
pag. 68



Trimless Recessed
pag. 69



Trimless Recessed Accessories
pag. 70



Adjustable Recessed
pag. 73



Adjustable Recessed
pag. 74



Adjustable Recessed
pag. 75



Adjustable Recessed
pag. 76



Wall Recessed
pag. 78



Ceiling and Wall
Surface
pag. 81



Ceiling and Wall
Surface
pag. 81



Ceiling and Wall
Surface
pag. 82



Ceiling and Wall Surface
pag. 83



Ceiling and Wall Surface
pag. 83



Ceiling and Wall Surface
pag. 84



Ceiling and Wall Surface
pag. 85



Ceiling and Wall Surface
pag. 86



Ceiling and Wall Surface
pag. 87



Ceiling and Wall Surface
pag. 88



Track Lights
pag. 91



Track Lights
pag. 92



Track Lights
pag. 93



Track Lights
pag. 94



Track Lights
pag. 95



Linear Lights
pag. 97



Linear Lights
pag. 98




Linear Lights
pag. 99



Linear Lights
pag. 100

Static Recessed

Indoor - Static recessed

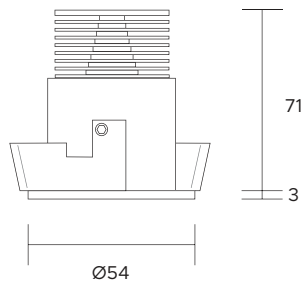

Tear-resistant system





1 - Honeycomb louver

Ø 48mm



| | |
|-------------------------------|--|
| POWER SUPPLY | max 9W - max 500mA |
| CODE | AV02001GN |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K |
| OPTICS | M W X 24° 36° 60° |
| FINISHES | W - White G - Grey B - Black K - Corten |
| FILTERS | 1 - Honeycomb louver |
| LUMEN OUTPUT SOURCE | 1200lm (3000°K, 500mA) |
| DELIVERED LUMEN OUTPUT | 1080lm (3000°K, 500mA, 36°) |
| LED NUMBER | 1 power LED multichip |
| MATERIAL | body in anodized aluminium, flange in painted aluminium |
| DRIVER | not included |
| POWER CABLE | includes 0,5 mt FEP 2 x 0,35 cable |
| WIRING | in series |
| MOUNTING | recessed (ceiling) |
| NOTES | other RAL on request |

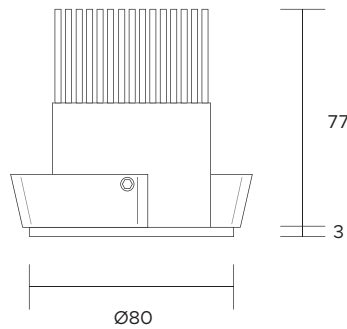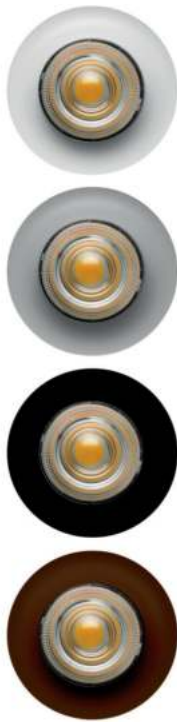


1 - Honeycomb louver

Ø 72mm



| | | | | | | | | | | |
|-------------------------------|--|-----|---|---|--|--|--|-----|-----|-----|
| POWER SUPPLY | max 12W - max 350mA | | | | | | | | | |
| CODE | AV02002GN | | | | | | | | | |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> </tr> </table> | N | M | W | | | | 15° | 25° | 40° |
| N | M | W | | | | | | | | |
| | | | | | | | | | | |
| 15° | 25° | 40° | | | | | | | | |
| FINISHES | W - White G - Grey B - Black K - Corten | | | | | | | | | |
| FILTERS | 1 - Honeycomb louver | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 1730lm (3000°K, 350mA) | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 1480lm (3000°K, 350mA, 40°) | | | | | | | | | |
| LED NUMBER | 1 power LED multichip | | | | | | | | | |
| MATERIAL | body in anodized aluminium, flange in painted aluminium | | | | | | | | | |
| DRIVER | not included | | | | | | | | | |
| POWER CABLE | includes 0,5 mt Liyy 2 x 0,50 cable | | | | | | | | | |
| WIRING | in series | | | | | | | | | |
| MOUNTING | recessed (ceiling) | | | | | | | | | |
| NOTES | other RAL on request | | | | | | | | | |

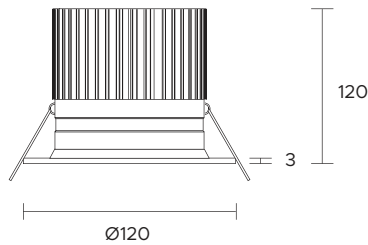

Ø 105mm




| | |
|-------------------------------|--|
| POWER SUPPLY | max 18W - max 500mA |
| CODE | AV02003GN |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K |
| OPTICS | N 18° M 30° W 55° X 70° |
| FINISHES | W - White G - Grey B - Black |
| LUMEN OUTPUT SOURCE | 2550lm (3000°K, 500mA) |
| DELIVERED LUMEN OUTPUT | 2470lm (3000°K, 500mA, 55°) |
| LED NUMBER | 1 power LED multichip |
| MATERIAL | body in anodized aluminium, flange in painted aluminium |
| DRIVER | not included |
| POWER CABLE | includes 0,5 mt Liyy 2 x 0,50 cable |
| WIRING | in series |
| MOUNTING | recessed (ceiling) |
| NOTES | other RAL on request |

Ø 105 mm






| | |
|-------------------------------|--|
| POWER SUPPLY | max 24W - max 700mA |
| CODE | AV02004GN |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K |
| OPTICS | N 18° M 30° W 55° X 70° |
| FINISHES | W - White G - Grey B - Black |
| LUMEN OUTPUT SOURCE | 3500lm (3000°K, 700mA) |
| DELIVERED LUMEN OUTPUT | 3320lm (3000°K, 700mA, 55°) |
| LED NUMBER | 1 power LED multichip |
| MATERIAL | body in anodized aluminium, flange in painted aluminium |
| DRIVER | not included |
| POWER CABLE | includes 0,5 mt Liyy 2 x 0,50 cable |
| WIRING | in series |
| MOUNTING | recessed (ceiling) |
| NOTES | other RAL on request |

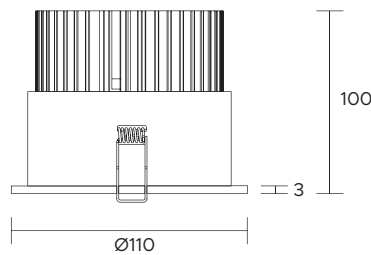

Ø 100mm




| | |
|-------------------------------|--|
| POWER SUPPLY | max 18W - max 500mA |
| CODE | AV02018GN |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K |
| OPTICS | N 10° |
| FINISHES | W - White G - Grey B - Black |
| LUMEN OUTPUT SOURCE | 2550lm (3000°K, 500mA) |
| DELIVERED LUMEN OUTPUT | 1800lm (3000°K, 500mA, 10°) |
| LED NUMBER | 1 power LED multichip |
| MATERIAL | body in anodized aluminium, flange in painted aluminium |
| DRIVER | not included |
| POWER CABLE | includes 0,5 mt 2 x 0,50 cable |
| WIRING | in series |
| MOUNTING | recessed (ceiling) |
| NOTES | other RAL on request |

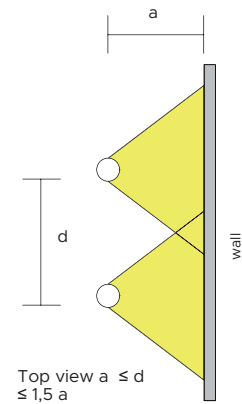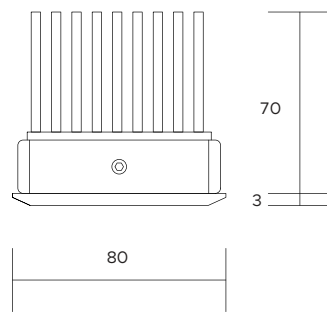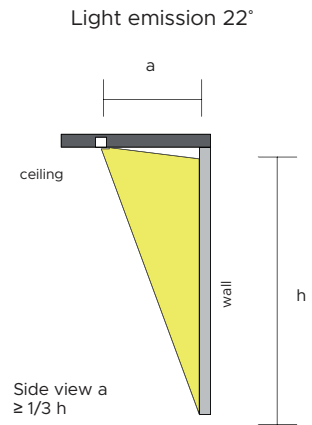

foro Ø72



| | |
|-------------------------------|--|
| POWER SUPPLY CODE | max 12W - max 350mA AV02323GN |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K |
| OPTICS | A2 Wall Washer |
| FINISHES | W - White G - Grey B - Black K - Corten |
| LUMEN OUTPUT SOURCE | 1730lm (3000°K, 350mA) |
| DELIVERED LUMEN OUTPUT | 1640lm (3000°K, 350mA, Asymmetric) |
| LED NUMBER | 1 power LED multichip |
| MATERIAL | body in anodized aluminium, flange in painted aluminium |
| DRIVER | not included |
| POWER CABLE | includes 0,5 mt FEP 2 x 0,35 cable |
| WIRING | in series |
| MOUNTING | recessed (ceiling) |
| NOTES | other RAL on request |

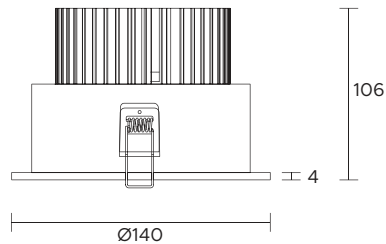

Ø 130mm



| | |
|-------------------------------|--|
| POWER SUPPLY | max 24W - max 700mA |
| CODE | AVO2020GN |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K |
| OPTICS | A2 Wall Washer |
| FINISHES | W - White G - Grey B - Black |
| LUMEN OUTPUT SOURCE | 3500lm (3000°K, 700mA) |
| DELIVERED LUMEN OUTPUT | 2370lm (3000°K, 700mA, Asymmetric) |
| LED NUMBER | 1 power LED multichip |
| MATERIAL | body in anodized aluminium, flange in painted aluminium |
| DRIVER | not included |
| POWER CABLE | includes 0,5 mt Liyy 2 x 0,50 cable |
| WIRING | in series |
| MOUNTING | recessed (ceiling, wall) |
| NOTES | other RAL on request |




Indoor - Static recessed

Backward Optic Recessed



Indoor - Backward optic recessed


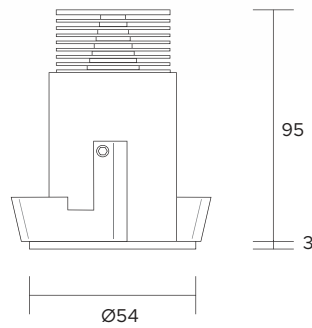


Tear-resistant system

Ø 48mm



| | |
|-------------------------------|--|
| POWER SUPPLY | max 9W - max 500mA |
| CODE | AV02077GN |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K |
| OPTICS | M 24° W 36° X 60° |
| FINISHES | W - White G - Grey B - Black K - Corten |
| LUMEN OUTPUT SOURCE | 1200lm (3000°K, 500mA) |
| DELIVERED LUMEN OUTPUT | 1080lm (3000°K, 500mA, 36°) |
| LED NUMBER | 1 power LED multichip |
| MATERIAL | body in anodized aluminium, flange in painted aluminium |
| DRIVER | not included |
| POWER CABLE | includes 0,5 mt FEP 2 x 0,35 cable |
| WIRING | in series |
| MOUNTING | recessed (ceiling) |
| NOTES | other RAL on request |

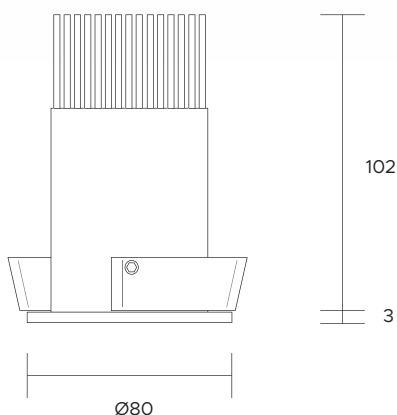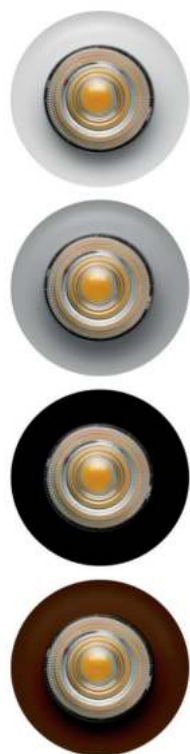

Ø 72mm



| | | | | | | | |
|-------------------------------|--|-----|---|---|-----|-----|-----|
| POWER SUPPLY | max 12W - max 350mA | | | | | | |
| CODE | AV02078GN | | | | | | |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K | | | | | | |
| OPTICS | <table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> </tr> </table> | N | M | W | 15° | 25° | 40° |
| N | M | W | | | | | |
| 15° | 25° | 40° | | | | | |
| FINISHES | W - White G - Grey B - Black K - Corten | | | | | | |
| LUMEN OUTPUT SOURCE | 1730lm (3000°K, 350mA) | | | | | | |
| DELIVERED LUMEN OUTPUT | 1480lm (3000°K, 350mA, 40°) | | | | | | |
| LED NUMBER | 1 power LED multichip | | | | | | |
| MATERIAL | body in anodized aluminium, flange in painted aluminium | | | | | | |
| DRIVER | not included | | | | | | |
| POWER CABLE | includes 0,5 mt Liyy 2 x 0,50 cable | | | | | | |
| WIRING | in series | | | | | | |
| MOUNTING | recessed (ceiling) | | | | | | |
| NOTES | other RAL on request | | | | | | |




Indoor - Backward optic recessed

Trimless Recessed

Indoor - Trimless recessed






Ø30 mm




| | | | | | | | | | | |
|-------------------------------|--|-----|---|---|--|--|--|-----|-----|-----|
| POWER SUPPLY | max 1W - max 350mA | | | | | | | | | |
| CODE | AV02272GN | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>20°</td> <td>35°</td> <td>50°</td> </tr> </table> | N | M | W | | | | 20° | 35° | 50° |
| N | M | W | | | | | | | | |
| | | | | | | | | | | |
| 20° | 35° | 50° | | | | | | | | |
| FINISHES | W - White G - Grey B - Black | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 110lm (3000°K, 350mA) | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 100lm (3000°K, 350mA, 50°) | | | | | | | | | |
| LED NUMBER | 1 power LED | | | | | | | | | |
| MATERIAL | body in anodized aluminium, flange in painted aluminium | | | | | | | | | |
| DRIVER | not included | | | | | | | | | |
| POWER CABLE | includes 0,5 mt FEP 2 x 0,35 cable | | | | | | | | | |
| WIRING | in series | | | | | | | | | |
| MOUNTING | recessed (ceiling) | | | | | | | | | |
| ACCESSORIES | see pag. 70 | | | | | | | | | |
| NOTES | other RAL on request | | | | | | | | | |

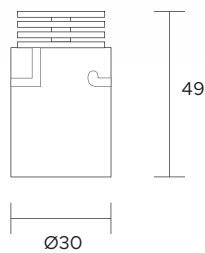

Ø40 mm




| POWER SUPPLY | max 3W - max 700mA | | | | | | | | | | | | |
|-------------------------------|--|-----|-----|---|---|--|--|--|--|-----|-----|-----|-----|
| CODE | AV02265GN | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber | | | | | | | | | | | | |
| OPTICS | <table border="1"> <thead> <tr> <th>N</th> <th>M</th> <th>W</th> <th>X</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> </tr> </tbody> </table> | N | M | W | X | | | | | 10° | 25° | 40° | 60° |
| N | M | W | X | | | | | | | | | | |
| | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | | | | | | | | | | |
| FINISHES | W - White G - Grey B - Black | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 190lm (3000°K, 700mA) | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 175lm (3000°K, 700mA, 40°) | | | | | | | | | | | | |
| LED NUMBER | 1 power LED | | | | | | | | | | | | |
| MATERIAL | body in anodized aluminium, flange in painted aluminium | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | |
| POWER CABLE | includes 0,5 mt FEP 2 x 0,35 cable | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | |
| MOUNTING | recessed (ceiling) | | | | | | | | | | | | |
| ACCESSORIES | see pag. 70 | | | | | | | | | | | | |
| NOTES | other RAL on request | | | | | | | | | | | | |

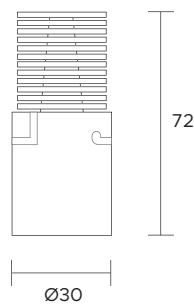

Ø40 mm





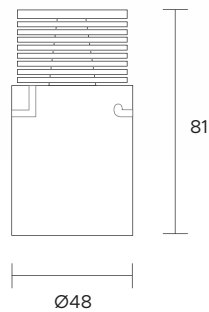






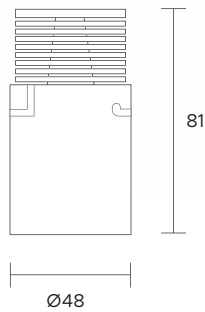
| | | | | | | | | | | |
|-------------------------------|--|-----|---|---|--|--|--|-----|-----|-----|
| POWER SUPPLY | max 6W - max 500mA | | | | | | | | | |
| CODE | AV02266GN | | | | | | | | | |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CR190 Y - Warm white 2700°K A - Amber | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>35°</td> </tr> </table> | N | M | W | | | | 15° | 25° | 35° |
| N | M | W | | | | | | | | |
| | | | | | | | | | | |
| 15° | 25° | 35° | | | | | | | | |
| FINISHES | W - White G - Grey B - Black | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 450lm (3000°K, 500mA) | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 380lm (3000°K, 500mA, 35°) | | | | | | | | | |
| LED NUMBER | 3 power LEDs | | | | | | | | | |
| MATERIAL | body in anodized aluminium, flange in painted aluminium | | | | | | | | | |
| DRIVER | not included | | | | | | | | | |
| POWER CABLE | includes 0,5 mt FEP 2 x 0,35 cable | | | | | | | | | |
| WIRING | in series | | | | | | | | | |
| MOUNTING | recessed (ceiling) | | | | | | | | | |
| ACCESSORIES | see pag. 70 | | | | | | | | | |
| NOTES | other RAL on request | | | | | | | | | |



 Ø60 mm



| | | | | | | | | | | |
|---|---|---|---|---|---|---|---|-----|-----|-----|
| POWER SUPPLY | max 9W - max 700mA | | | | | | | | | |
| CODE | AV02267GN | | | | | | | | | |
| LED COLOUR | <ul style="list-style-type: none"> C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber | | | | | | | | | |
| OPTICS | <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="text-align: center;">N</td> <td style="text-align: center;">M</td> <td style="text-align: center;">W</td> </tr> <tr> <td style="text-align: center;"></td> <td style="text-align: center;"></td> <td style="text-align: center;"></td> </tr> <tr> <td style="text-align: center;">15°</td> <td style="text-align: center;">25°</td> <td style="text-align: center;">40°</td> </tr> </table> | N | M | W |  |  |  | 15° | 25° | 40° |
| N | M | W | | | | | | | | |
|  |  |  | | | | | | | | |
| 15° | 25° | 40° | | | | | | | | |
| FINISHES | <ul style="list-style-type: none"> W - White G - Grey B - Black | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 570lm (3000°K, 700mA) | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 460lm (3000°K, 700mA, 40°) | | | | | | | | | |
| LED NUMBER | 3 power LEDs | | | | | | | | | |
| MATERIAL | body in anodized aluminium, flange in painted aluminium | | | | | | | | | |
| DRIVER | not included | | | | | | | | | |
| POWER CABLE | includes 0,5 mt FEP 2 x 0,35 cable | | | | | | | | | |
| WIRING | in series | | | | | | | | | |
| MOUNTING | recessed (ceiling) | | | | | | | | | |
| ACCESSORIES | see pag. 70 | | | | | | | | | |
| NOTES | other RAL on request | | | | | | | | | |




max 9W - max 500mA

AV02268GN

C - Cool white 5000°K
 N - Natural white 4000°K
 W - Warm white 3000°K
 H - Warm white 3000°K - CRI90
 Y - Warm white 2700°K

OPTICS



FINISHES

W - White
 G - Grey
 B - Black

LUMEN OUTPUT SOURCE 1200lm (3000°K, 500mA)

DELIVERED LUMEN OUTPUT 1080lm (3000°K, 500mA, 36°)

LED NUMBER 1 power LED multichip

MATERIAL body in anodized aluminium,
 flange in painted aluminium

DRIVER not included


POWER CABLE includes 0,5 mt FEP 2 x 0,35 cable

WIRING in series

MOUNTING recessed (ceiling)

ACCESSORIES see pag. 70


NOTES other RAL on request

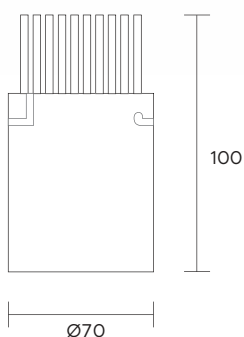

Ø82 mm



| POWER SUPPLY | max 12W - max 350mA | | | | | | | | | |
|-------------------------------|--|-----|---|---|--|--|--|-----|-----|-----|
| CODE | AV02269GN | | | | | | | | | |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K | | | | | | | | | |
| OPTICS | <table border="1"> <thead> <tr> <th>N</th> <th>M</th> <th>W</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> </tr> </tbody> </table> | N | M | W | | | | 15° | 25° | 40° |
| N | M | W | | | | | | | | |
| | | | | | | | | | | |
| 15° | 25° | 40° | | | | | | | | |
| FINISHES | W - White G - Grey B - Black | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 1730lm (3000°K, 350mA) | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 1480lm (3000°K, 350mA, 40°) | | | | | | | | | |
| LED NUMBER | 1 power LED multichip | | | | | | | | | |
| MATERIAL | body in anodized aluminium, flange in painted aluminium | | | | | | | | | |
| DRIVER | not included | | | | | | | | | |
| POWER CABLE | includes 0,5 mt Liyy 2 x 0,50 cable | | | | | | | | | |
| WIRING | in series | | | | | | | | | |
| MOUNTING | recessed (ceiling) | | | | | | | | | |
| ACCESSORIES | see pag. 70 | | | | | | | | | |
| NOTES | other RAL on request | | | | | | | | | |

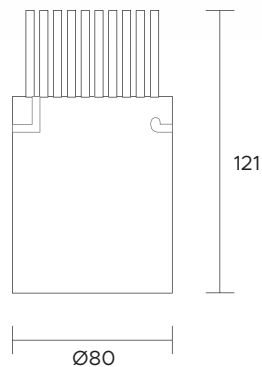


Ø90 mm



| | | | | | | | | | | |
|-------------------------------|--|-----|---|---|--|--|--|-----|-----|-----|
| POWER SUPPLY | max 18W - 500mA | | | | | | | | | |
| CODE | AV02271GN | | | | | | | | | |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> </tr> </table> | N | M | W | | | | 15° | 25° | 40° |
| N | M | W | | | | | | | | |
| | | | | | | | | | | |
| 15° | 25° | 40° | | | | | | | | |
| FINISHES | W - White G - Grey B - Black | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 2550lm (3000°K, 500mA) | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 2170lm (3000°K, 500mA, 40°) | | | | | | | | | |
| LED NUMBER | 1 power LED multichip | | | | | | | | | |
| MATERIAL | body in anodized aluminium, flange in painted aluminium | | | | | | | | | |
| DRIVER | not included | | | | | | | | | |
| POWER CABLE | includes 0,5 mt Liyy 2 x 0,50 cable | | | | | | | | | |
| WIRING | in series | | | | | | | | | |
| MOUNTING | recessed (ceiling) | | | | | | | | | |
| ACCESSORIES | see pag. 70 | | | | | | | | | |
| NOTES | other RAL on request | | | | | | | | | |


Installation Accessories



Code: **AV02272GN**

Plasterboard flange for **AV02264GN**


W - White
G - Grey
B - Black



Code: **AV02273GN**

Plasterboard flange for **AV02265GN**


W - White
G - Grey
B - Black



Code: **AV02273GN**

Plasterboard flange for **AV02266GN**


W - White
G - Grey
B - Black



Code: **AV02274GN**

Plasterboard flange for **AV02267GN e AV02268GN**


W - White
G - Grey
B - Black

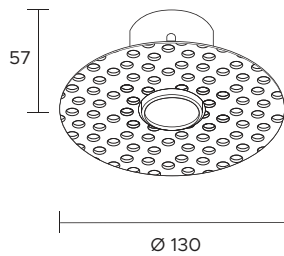

Code: **AV02275GN**

Plasterboard flange for **AV02269GN**

W - White
G - Grey
B - Black

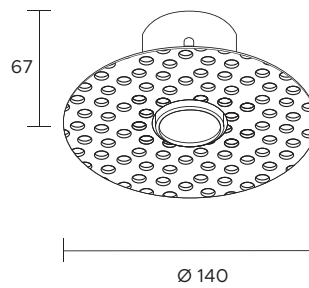


Code: **AV02276GN**

Plasterboard flange for **AV02271GN**

W - White
G - Grey
B - Black

⚠ To be ordered at the same time as the lighting device

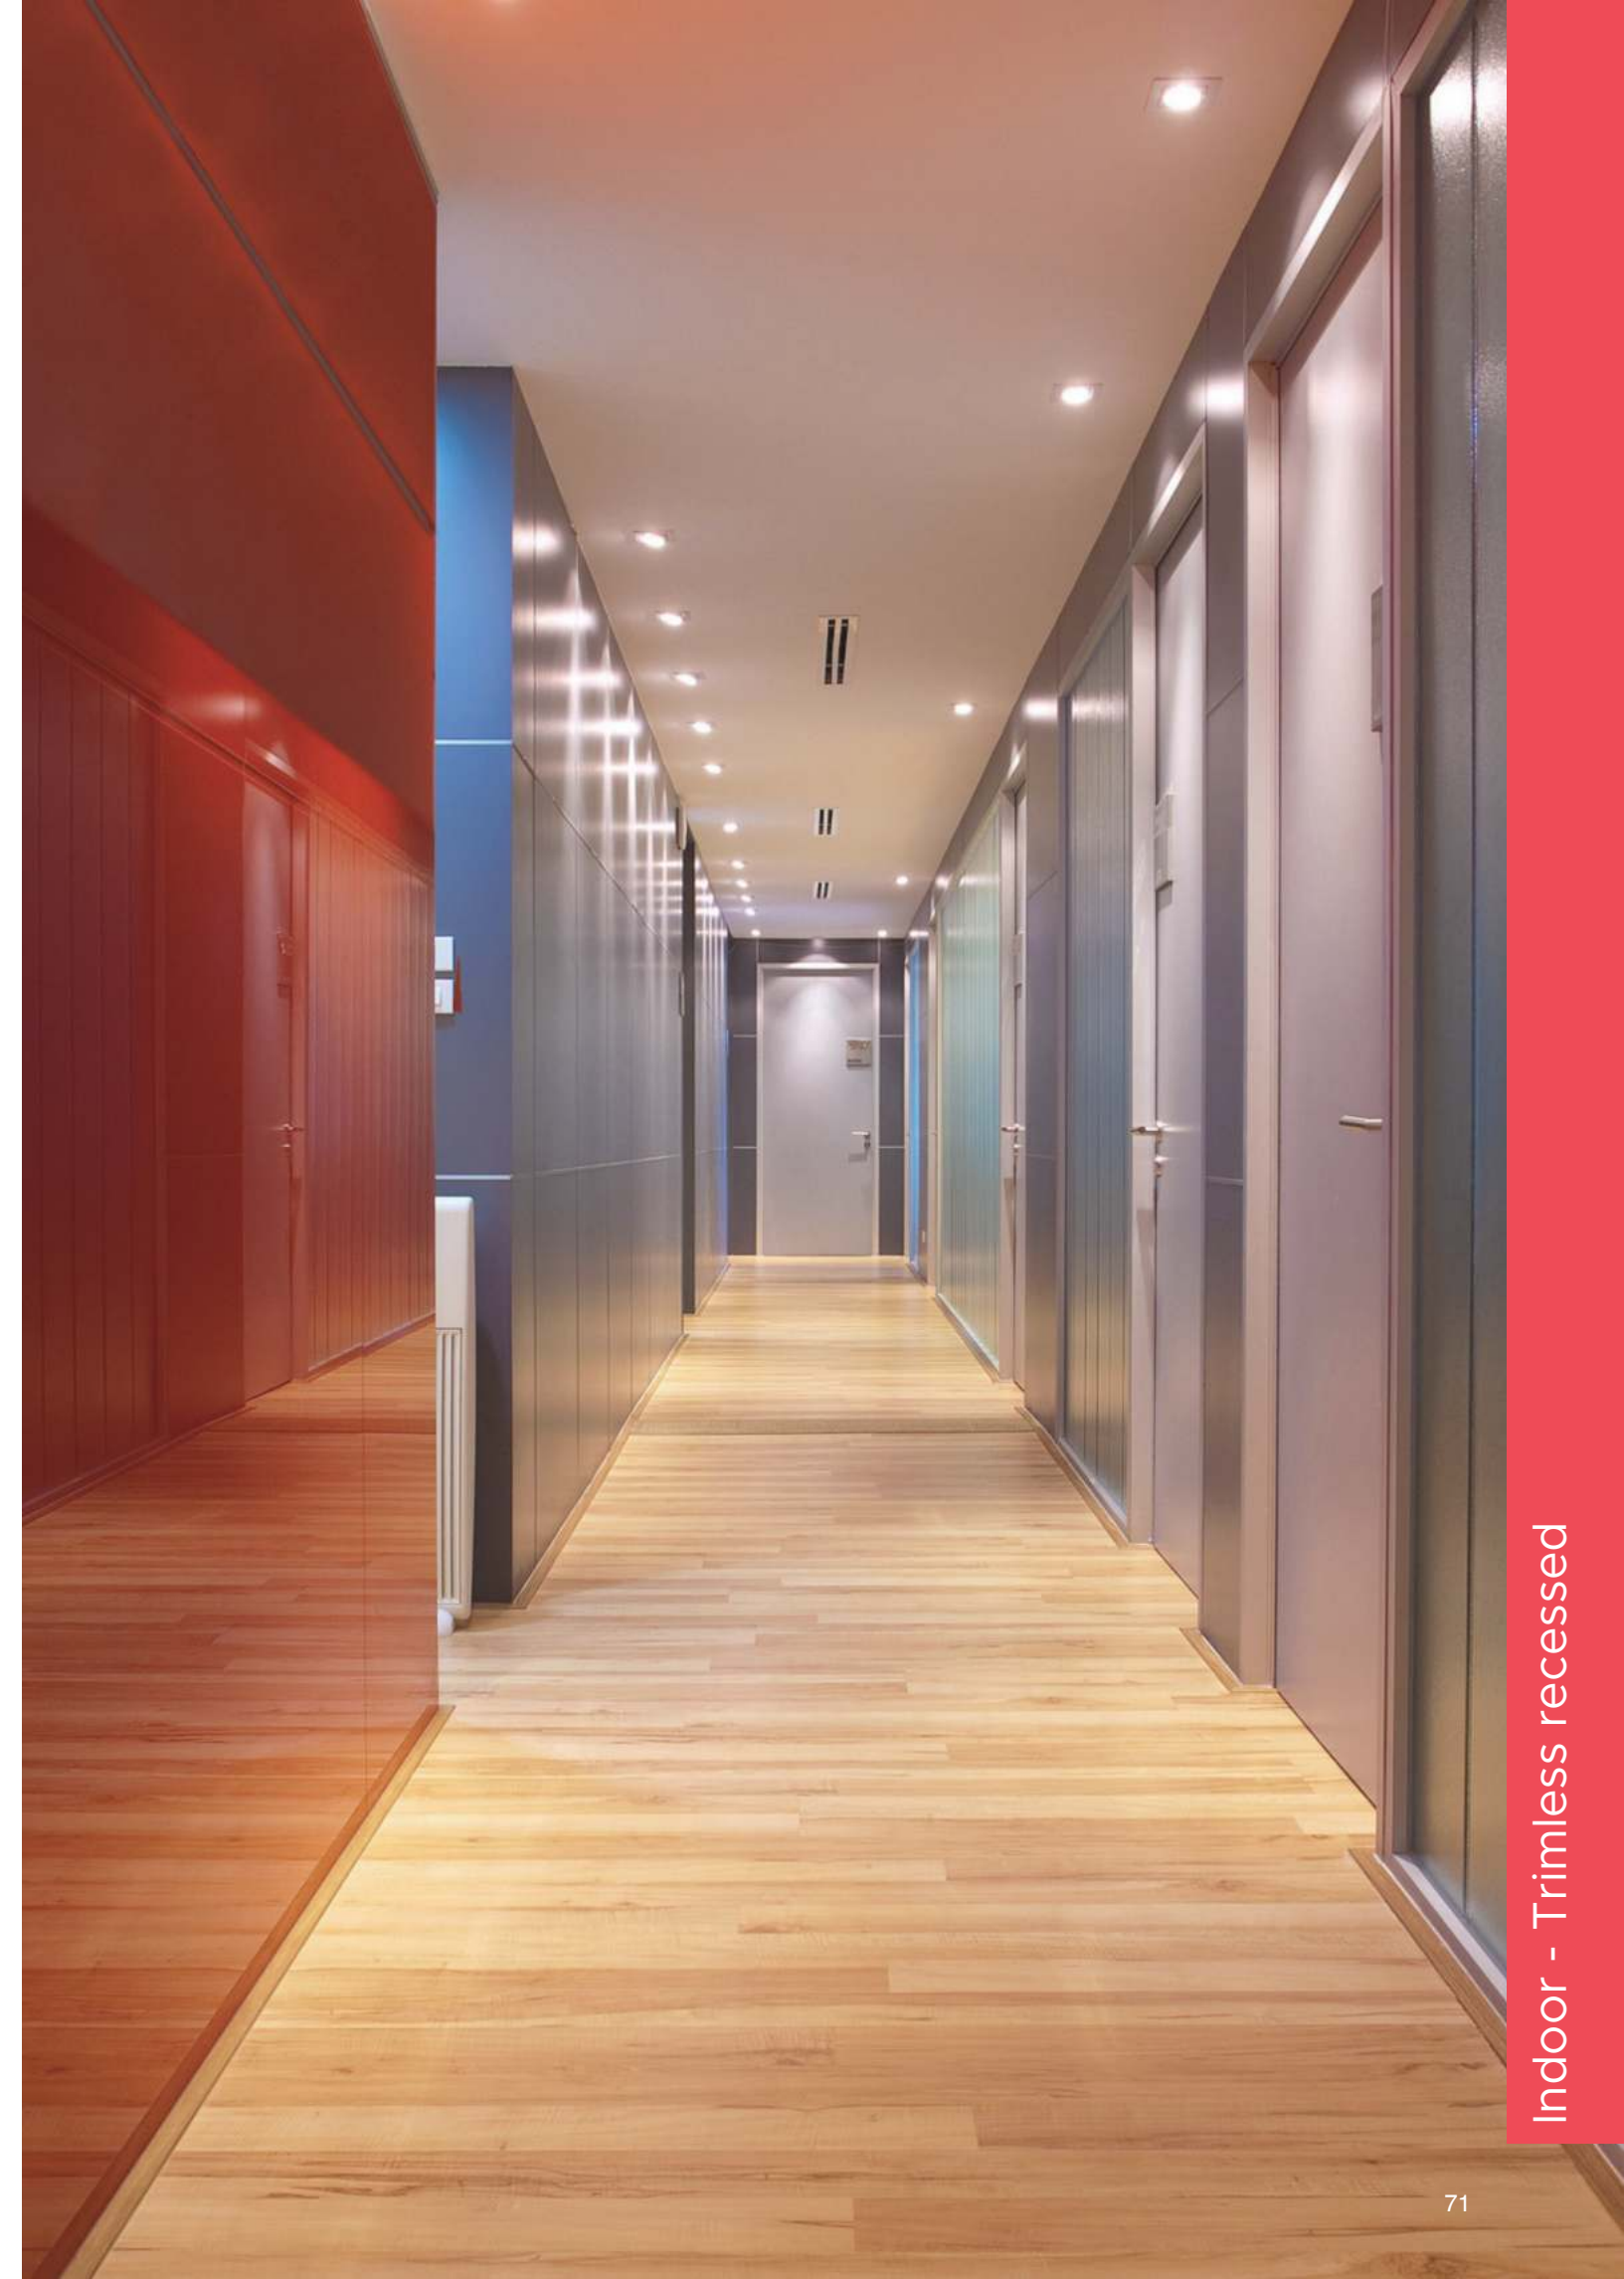


Indoor - Trimless recessed

Adjustable Recessed

Indoor - Adjustable recessed



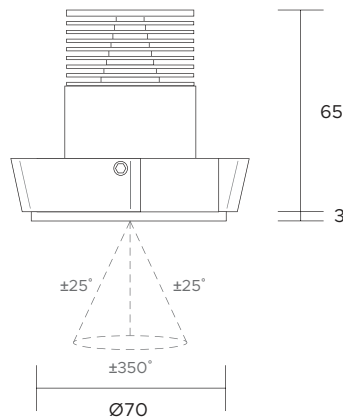


Tear-resistant system

Ø 63mm




| | |
|-------------------------------|--|
| POWER SUPPLY | max 9W - max 500mA |
| CODE | AV02042GN |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CR190 Y - Warm white 2700°K |
| OPTICS | M 24° W 36° X 60° |
| FINISHES | W - White G - Grey B - Black K - Corten |
| LUMEN OUTPUT SOURCE | 1200lm (3000°K, 500mA) |
| DELIVERED LUMEN OUTPUT | 1080lm (3000°K, 500mA, 36°) |
| LED NUMBER | 1 power LED multichip |
| MATERIAL | body in anodized aluminium, flange in painted aluminium |
| DRIVER | not included |
| POWER CABLE | includes 0,5 mt FEP 2 x 0,35 cable |
| WIRING | in series |
| MOUNTING | recessed (ceiling) |
| NOTES | other RAL on request |

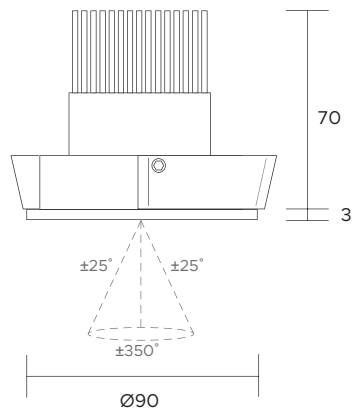

Ø 84mm




| | | | | | | | | | | |
|-------------------------------|--|-----|---|---|--|--|--|-----|-----|-----|
| POWER SUPPLY | max 12W - max 350mA | | | | | | | | | |
| CODE | AV02043GN | | | | | | | | | |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> </tr> </table> | N | M | W | | | | 15° | 25° | 40° |
| N | M | W | | | | | | | | |
| | | | | | | | | | | |
| 15° | 25° | 40° | | | | | | | | |
| FINISHES | W - White G - Grey B - Black K - Corten | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 1730lm (3000°K, 350mA) | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 1480lm (3000°K, 350mA, 40°) | | | | | | | | | |
| LED NUMBER | 1 power LED multichip | | | | | | | | | |
| MATERIAL | body in anodized aluminium, flange in painted aluminium | | | | | | | | | |
| DRIVER | not included | | | | | | | | | |
| POWER CABLE | includes 0,5 mt Liyy 2 x 0,50 cable | | | | | | | | | |
| WIRING | in series | | | | | | | | | |
| MOUNTING | recessed (ceiling) | | | | | | | | | |
| NOTES | other RAL on request | | | | | | | | | |

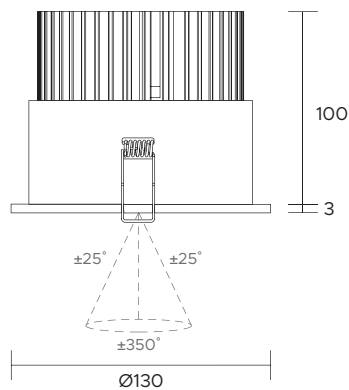

Ø 122mm





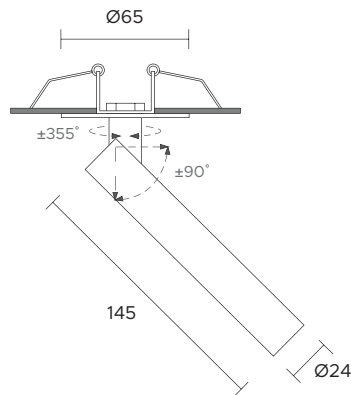









| | |
|-------------------------------|--|
| POWER SUPPLY | max 18W - max 500mA |
| CODE | AV02070GN |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CR190 Y - Warm white 2700°K |
| OPTICS | N 10° |
| FINISHES | W - White G - Grey B - Black |
| LUMEN OUTPUT SOURCE | 2550lm (3000°K, 500mA) |
| DELIVERED LUMEN OUTPUT | 1800lm (3000°K, 500mA, 10°) |
| LED NUMBER | 1 power LED multichip |
| MATERIAL | body in anodized aluminium, flange in painted aluminium |
| DRIVER | not included |
| POWER CABLE | includes 0,5 mt FEP 2 x 0,35 cable |
| WIRING | in series |
| MOUNTING | recessed ceiling |
| NOTES | other RAL on request |




 40mm



| POWER SUPPLY | max 4W - max 1200mA | | | | | | | | | | | | |
|---|--|---|---|---|---|---|---|---|---|-----|-----|-----|-----|
| CODE | AV02279GN | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K | | | | | | | | | | | | |
| OPTICS | <table border="1"> <thead> <tr> <th>N</th> <th>M</th> <th>W</th> <th>X</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> </tr> </tbody> </table> | N | M | W | X |  |  |  |  | 10° | 25° | 40° | 60° |
| N | M | W | X | | | | | | | | | | |
|  |  |  |  | | | | | | | | | | |
| 10° | 25° | 40° | 60° | | | | | | | | | | |
| FINISHES | W - White G - Grey B - Black | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 250lm (3000°K, 1200mA) | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 190lm (3000°K, 1200mA, 40°) | | | | | | | | | | | | |
| LED NUMBER | 1 power LED | | | | | | | | | | | | |
| MATERIAL | painted aluminium | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | |
| POWER CABLE | includes 0,5 mt FEP 2 x 0,35 cable | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | |
| MOUNTING | recessed (ceiling, wall) | | | | | | | | | | | | |
| NOTES | other RAL on request | | | | | | | | | | | | |





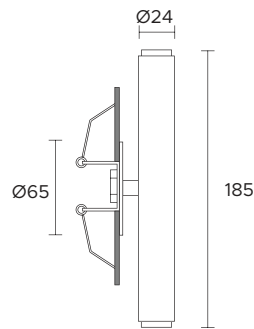









Indoor - Adjustable recessed



 40mm





| POWER SUPPLY | max 3W x2 - max 700mA | | | | | | | | | | | | |
|---|--|---|---|---|---|---|---|---|---|-----|-----|-----|-----|
| CODE | AV02280GN | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K | | | | | | | | | | | | |
| OPTICS | <table border="1"> <thead> <tr> <th>N</th> <th>M</th> <th>W</th> <th>X</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> </tr> </tbody> </table> | N | M | W | X |  |  |  |  | 10° | 25° | 40° | 60° |
| N | M | W | X | | | | | | | | | | |
|  |  |  |  | | | | | | | | | | |
| 10° | 25° | 40° | 60° | | | | | | | | | | |
| FINISHES | W - White G - Grey B - Black | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 190lm (3000°K, 700mA) x2 | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 175lm (3000°K, 700mA, 40°) x2 | | | | | | | | | | | | |
| LED NUMBER | 2 power LEDs | | | | | | | | | | | | |
| MATERIAL | painted aluminium | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | |
| POWER CABLE | includes 0,5 mt FEP 2 x 0,35 cable | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | |
| MOUNTING | recessed (wall) | | | | | | | | | | | | |
| NOTES | other RAL on request | | | | | | | | | | | | |

| CAFFE | GELATI |
|-------------------|-----------------|
| CAFFÈ | CIOCCOLATO |
| CAFFÈ LATTE | CAFFÈ |
| CAPPUCCINO | PISTACCHIO |
| ESPRESSO | COCCO |
| CAFFÈ MOCCHA | NOCCIOLA |
| ATTOGATO | LIMONE |
| CAFFÈ FREDDO | FRAGOLA |
| CAFFÈ LUNGO | STRACCIATELLA |
| CAFFÈ CORMETTO | TUTTI FRUTTI |
| AMERICANO | FIOR DI LATTE |
| MACCHIATO | PESCA |
| CAFFÈ con PANNA | FRUTTI DI BOSCO |
| CAFFÈ RISTRETTO | MENTA |
| CAFFÈ DOPPIO | AMARENA |
| CAFFÈ con SCHIUMA | |


Ceiling and Wall Surface




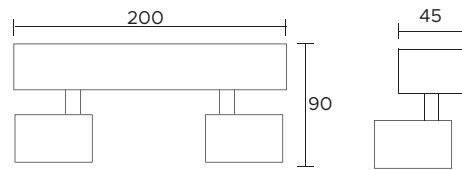
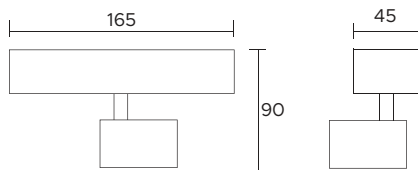


| | | | | | | | | | | |
|-------------------------------|--|-----|---|---|--|--|--|-----|-----|-----|
| POWER SUPPLY | max 6W - 220V/240V | | | | | | | | | |
| CODE | AV02091GN | | | | | | | | | |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>M</td> <td>W</td> <td>X</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>24°</td> <td>36°</td> <td>60°</td> </tr> </table> | M | W | X | | | | 24° | 36° | 60° |
| M | W | X | | | | | | | | |
| | | | | | | | | | | |
| 24° | 36° | 60° | | | | | | | | |
| FINISHES | W - White G - Grey B - Black | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 890lm (3000°K, 350mA) | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 710lm (3000°K, 350mA, 36°) | | | | | | | | | |
| LED NUMBER | 1 power LED multichip | | | | | | | | | |
| MATERIAL | painted aluminium | | | | | | | | | |
| DRIVER | included | | | | | | | | | |
| POWER CABLE | | | | | | | | | | |
| MOUNTING | ceiling, wall surface | | | | | | | | | |
| NOTES | other RAL on request | | | | | | | | | |

| | | | | | | | | | | |
|-------------------------------|--|-----|---|---|--|--|--|-----|-----|-----|
| POWER SUPPLY | max 6W x2 - 220V/240V | | | | | | | | | |
| CODE | AV02092GN | | | | | | | | | |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>M</td> <td>W</td> <td>X</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>24°</td> <td>36°</td> <td>60°</td> </tr> </table> | M | W | X | | | | 24° | 36° | 60° |
| M | W | X | | | | | | | | |
| | | | | | | | | | | |
| 24° | 36° | 60° | | | | | | | | |
| FINISHES | W - White G - Grey B - Black | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 890lm (3000°K, 350mA) x2 | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 710lm (3000°K, 350mA, 36°) x2 | | | | | | | | | |
| LED NUMBER | 2 power LEDs multichip | | | | | | | | | |
| MATERIAL | painted aluminium | | | | | | | | | |
| DRIVER | included | | | | | | | | | |
| POWER CABLE | | | | | | | | | | |
| MOUNTING | ceiling, wall surface | | | | | | | | | |
| NOTES | other RAL on request | | | | | | | | | |

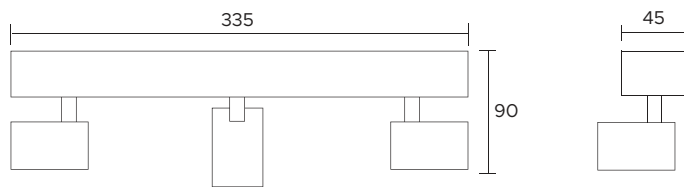


| | |
|-------------------------------|--|
| POWER SUPPLY | max 6W x3 - 220V/240V |
| CODE | AV02093GN |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K |
| OPTICS | M W X  24° 36° 60° |
| FINISHES | W - White G - Grey B - Black |
| LUMEN OUTPUT SOURCE | 890lm (3000°K, 350mA) x3 |
| DELIVERED LUMEN OUTPUT | 710lm (3000°K, 350mA, 36°) x3 |
| LED NUMBER | 3 power LEDs multichip |
| MATERIAL | painted aluminium |
| DRIVER | included |
| POWER CABLE | |
| MOUNTING | ceiling, wall surface |
| NOTES | other RAL on request |

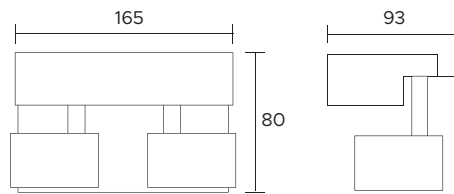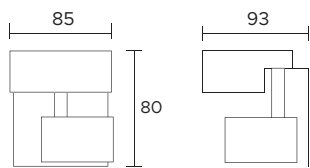


| | |
|-------------------------------|--|
| POWER SUPPLY | max 6W - 220V/240V |
| CODE | AVO2094GN |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K |
| OPTICS | M 24° W 36° X 60° |
| FINISHES | W - White G - Grey B - Black |
| LUMEN OUTPUT SOURCE | 890lm (3000°K, 350mA) |
| DELIVERED LUMEN OUTPUT | 710lm (3000°K, 350mA, 36°) |
| LED NUMBER | 1 power LED multichip |
| MATERIAL | painted aluminium |
| DRIVER | included |
| POWER CABLE | |
| MOUNTING | ceiling, wall surface |
| NOTES | other RAL on request |


| | |
|-------------------------------|--|
| POWER SUPPLY | max 6W x2 - 220V/240V |
| CODE | AVO2095GN |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K |
| OPTICS | M 24° W 36° X 60° |
| FINISHES | W - White G - Grey B - Black |
| LUMEN OUTPUT SOURCE | 890lm (3000°K, 350mA) x2 |
| DELIVERED LUMEN OUTPUT | 710lm (3000°K, 350mA, 36°) x2 |
| LED NUMBER | 2 power LEDs multichip |
| MATERIAL | painted aluminium |
| DRIVER | included |
| POWER CABLE | |
| MOUNTING | ceiling, wall surface |
| NOTES | other RAL on request |

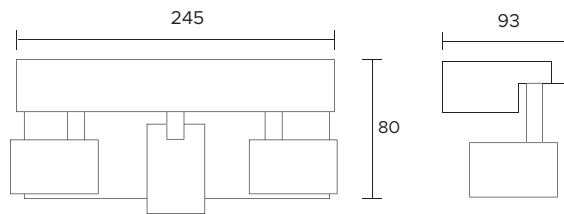


| | | | | | | | | | | |
|-------------------------------|--|-----|---|---|--|--|--|-----|-----|-----|
| POWER SUPPLY | max 6W x3 - 220V/240V | | | | | | | | | |
| CODE | AV02096GN | | | | | | | | | |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>M</td> <td>W</td> <td>X</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>24°</td> <td>36°</td> <td>60°</td> </tr> </table> | M | W | X | | | | 24° | 36° | 60° |
| M | W | X | | | | | | | | |
| | | | | | | | | | | |
| 24° | 36° | 60° | | | | | | | | |
| FINISHES | W - White G - Grey B - Black | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 890lm (3000°K, 350mA) x3 | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 710lm (3000°K, 350mA, 36°) x3 | | | | | | | | | |
| LED NUMBER | 3 power LEDs multichip | | | | | | | | | |
| MATERIAL | painted aluminium | | | | | | | | | |
| DRIVER | included | | | | | | | | | |
| POWER CABLE | | | | | | | | | | |
| MOUNTING | ceiling, wall surface | | | | | | | | | |
| NOTES | other RAL on request | | | | | | | | | |

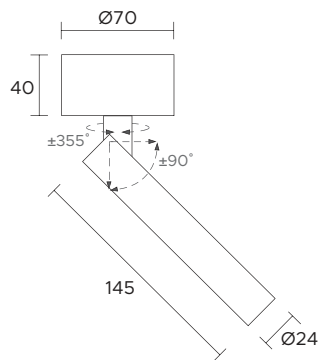



| | | | | | | | | | | | | | |
|-------------------------------|--|-----|-----|---|---|--|--|--|--|-----|-----|-----|-----|
| POWER SUPPLY | max 4W - 220V/240V | | | | | | | | | | | | |
| CODE | AV02281GN | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K | | | | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> </tr> </table> | N | M | W | X | | | | | 10° | 25° | 40° | 60° |
| N | M | W | X | | | | | | | | | | |
| | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | | | | | | | | | | |
| FINISHES | W - White G - Grey B - Black | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 250lm (3000°K, 1200mA) | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 190lm (3000°K, 1200mA, 40°) | | | | | | | | | | | | |
| LED NUMBER | 1 power LED | | | | | | | | | | | | |
| MATERIAL | painted aluminium | | | | | | | | | | | | |
| DRIVER | included | | | | | | | | | | | | |
| POWER CABLE | | | | | | | | | | | | | |
| MOUNTING | ceiling, wall surface | | | | | | | | | | | | |
| NOTES | other RAL on request | | | | | | | | | | | | |

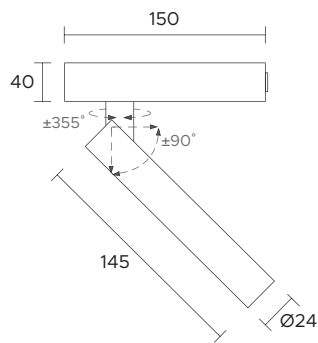

| | | | | | | | | | | | | | |
|-------------------------------|--|-----|-----|---|---|--|--|--|--|-----|-----|-----|-----|
| POWER SUPPLY | max 4W - 220V/240V | | | | | | | | | | | | |
| CODE | AV02282GN | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K | | | | | | | | | | | | |
| OPTICS | <table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> </tr> </table> | N | M | W | X | | | | | 10° | 25° | 40° | 60° |
| N | M | W | X | | | | | | | | | | |
| | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | | | | | | | | | | |
| FINISHES | W - White G - Grey B - Black | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 250lm (3000°K, 1200mA) | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 190lm (3000°K, 1200mA, 40°) | | | | | | | | | | | | |
| LED NUMBER | 1 power LED | | | | | | | | | | | | |
| MATERIAL | painted aluminium | | | | | | | | | | | | |
| DRIVER | included | | | | | | | | | | | | |
| POWER CABLE | | | | | | | | | | | | | |
| MOUNTING | ceiling, wall surface | | | | | | | | | | | | |
| NOTES | other RAL on request | | | | | | | | | | | | |

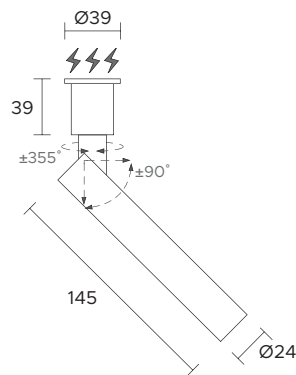

| | | | | | | | | | | | | | |
|-------------------------------|--|-----|-----|---|---|--|--|--|--|-----|-----|-----|-----|
| POWER SUPPLY | max 4W - max 1200mA | | | | | | | | | | | | |
| CODE | AV02283GN | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K | | | | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> </tr> </table> | N | M | W | X | | | | | 10° | 25° | 40° | 60° |
| N | M | W | X | | | | | | | | | | |
| | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | | | | | | | | | | |
| FINISHES | W - White G - Grey B - Black | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 250lm (3000°K, 1200mA) | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 190lm (3000°K, 1200mA, 40°) | | | | | | | | | | | | |
| LED NUMBER | 1 power LED | | | | | | | | | | | | |
| MATERIAL | painted aluminium | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | |
| POWER CABLE | includes 0,5 mt Liyy 2x0,50 cable | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | |
| MOUNTING | ceiling, wall surface | | | | | | | | | | | | |
| NOTES | other RAL on request | | | | | | | | | | | | |

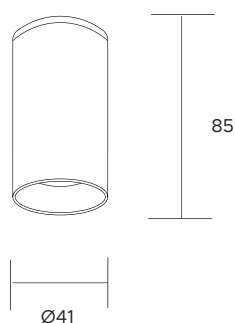

| | |
|-------------------------------|--|
| POWER SUPPLY | max 3W - max 700mA |
| CODE | AV02324GN |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K |
| OPTICS | S |
| FINISHES | W - White G - Grey B - Black K - Corten |
| LUMEN OUTPUT SOURCE | 190lm (3000°K, 700mA) |
| DELIVERED LUMEN OUTPUT | 130lm (3000°K, 700mA, 3°) |
| LED NUMBER | 1 power LED |
| MATERIAL | painted aluminium |
| DRIVER | not included |
| POWER CABLE | includes 0,5 mt FEP 2 x 0,35 cable |
| WIRING | in series |
| MOUNTING | surface (ceiling) |
| NOTES | other RAL on request |




| | |
|-------------------------------|--|
| POWER SUPPLY | max 6W - max 700mA |
| CODE | AV02325GN |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K |
| OPTICS | N M W |
| FINISHES | W - White G - Grey B - Black K - Corten |
| LUMEN OUTPUT SOURCE | 800lm (3000°K, 700mA) |
| DELIVERED LUMEN OUTPUT | 430lm (3000°K, 700mA, 25°) |
| LED NUMBER | 1 power LED multichip |
| MATERIAL | painted aluminium |
| DRIVER | not included |
| POWER CABLE | includes 0,5 mt FEP 2 x 0,35 cable |
| WIRING | in series |
| MOUNTING | surface (ceiling) |
| NOTES | other RAL on request |





Track Lights



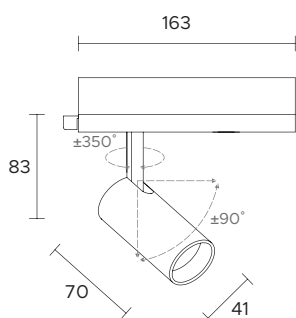


Designed for 240V track




| | |
|-------------------------------|--|
| POWER SUPPLY | max 3W - 220V/240V |
| CODE | AV02309GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K |
| OPTICS | S 3° |
| FINISHES | W - White B - Black |
| LUMEN OUTPUT SOURCE | 190lm (3000°K, 700mA) |
| DELIVERED LUMEN OUTPUT | 130lm (3000°K, 700mA, 3°) |
| LED NUMBER | 1 power LED |
| MATERIAL | painted aluminium |
| DRIVER | included |
| POWER CABLE | |
| MOUNTING | ceiling, wall track |


| | |
|-------------------------------|--|
| POWER SUPPLY | max 6W - 220V/240V |
| CODE | AV02326GN |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K |
| OPTICS | N M W 15° 25° 40° |
| FINISHES | W - White B - Black |
| LUMEN OUTPUT SOURCE | 800lm (3000°K, 700mA) |
| DELIVERED LUMEN OUTPUT | 430lm (3000°K, 700mA, 25°) |
| LED NUMBER | 1 power LED multichip |
| MATERIAL | painted aluminium |
| DRIVER | included |
| POWER CABLE | |
| MOUNTING | ceiling, wall track |

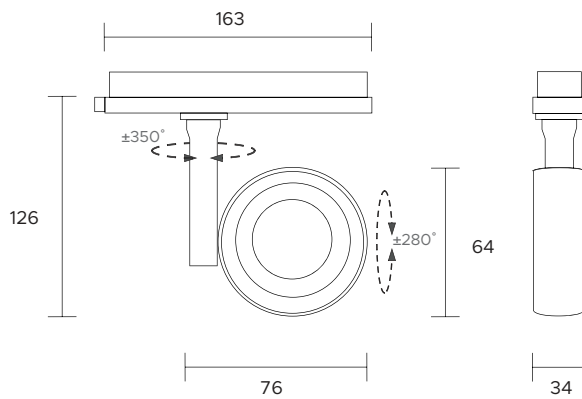


Designed for 240V track





| | |
|-------------------------------|--|
| POWER SUPPLY | max 11W - 220V/240V |
| CODE | AV02296GN |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K |
| OPTICS | N M W 15° 30° 45° |
| FINISHES | W - White B - Black |
| LUMEN OUTPUT SOURCE | 1485lm (3000°K, 300mA) |
| DELIVERED LUMEN OUTPUT | 1170lm (3000°K, 300mA, 45°) |
| LED NUMBER | 1 power LED multichip |
| MATERIAL | painted aluminium |
| DRIVER | included |
| POWER CABLE | |
| MOUNTING | ceiling, wall track |

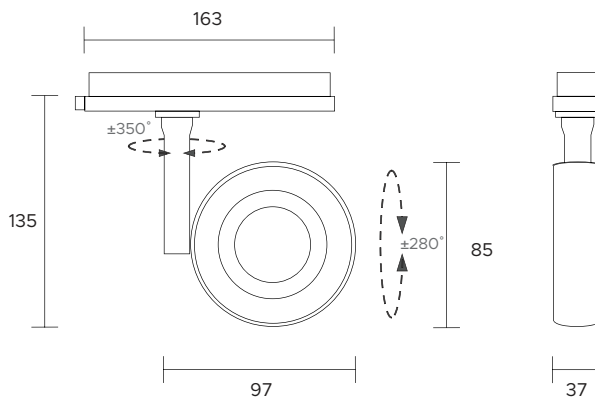


Designed for 240V track




| | |
|-------------------------------|--|
| POWER SUPPLY | max 16W - 220V/240V |
| CODE | AV02297GN |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CR190 Y - Warm white 2700°K |
| OPTICS | N 15° M 30° W 45° |
| FINISHES | W - White B - Black |
| LUMEN OUTPUT SOURCE | 2230lm (3000°K, 450mA) |
| DELIVERED LUMEN OUTPUT | 1920lm (3000°K, 450mA, 45°) |
| LED NUMBER | 1 power LED multichip |
| MATERIAL | painted aluminium |
| DRIVER | included |
| POWER CABLE | |
| MOUNTING | ceiling, wall track |

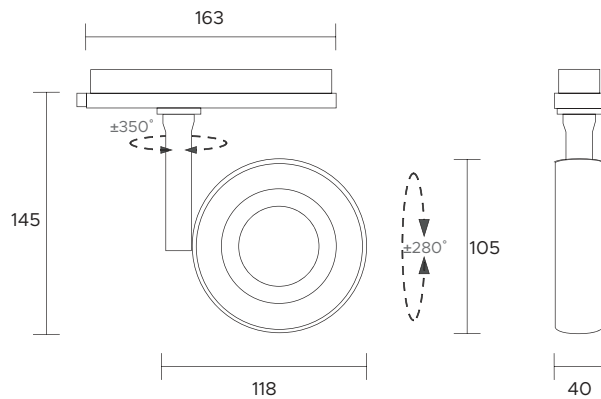

Designed for 240V track



| | |
|-------------------------------|--|
| POWER SUPPLY | max 22W - 220V/240V |
| CODE | AV02298GN |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K |
| OPTICS | N 15° M 30° W 45° |
| FINISHES | W - White B - Black |
| LUMEN OUTPUT SOURCE | 3000lm (3000°K, 650mA) |
| DELIVERED LUMEN OUTPUT | 2450lm (3000°K, 650mA, 45°) |
| LED NUMBER | 1 power LED multichip |
| MATERIAL | painted aluminium |
| DRIVER | included |
| POWER CABLE | |
| MOUNTING | ceiling, wall track |

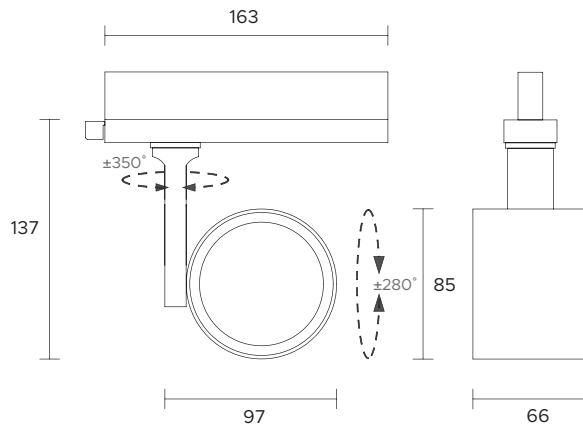


Designed for 240V track



| | |
|-------------------------------|--|
| POWER SUPPLY | max 18W - 220V/240V |
| CODE | AV02310GN |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K |
| OPTICS | N 10° |
| FINISHES | W - White B - Black |
| LUMEN OUTPUT SOURCE | 2550lm (3000°K, 500mA) |
| DELIVERED LUMEN OUTPUT | 1800lm (3000°K, 500mA, 10°) |
| LED NUMBER | 1 power LED multichip |
| MATERIAL | painted aluminium |
| DRIVER | included |
| POWER CABLE | |
| MOUNTING | ceiling, wall track |




Linear Lights

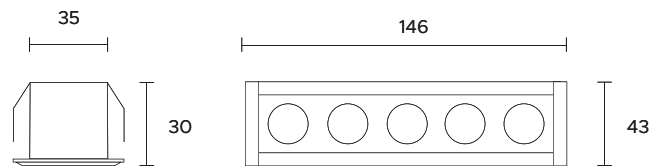




 36x140 mm



| | |
|-------------------------------|--|
| POWER SUPPLY | max 5W - max 350mA |
| CODE | AV02023GN |
| LED COLOUR | <ul style="list-style-type: none"> C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue |
| OPTICS | <ul style="list-style-type: none"> <input type="checkbox"/> N  12° <input type="checkbox"/> M  35° <input type="checkbox"/> W  50° |
| FINISHES | <ul style="list-style-type: none"> <input type="checkbox"/> W - White <input type="checkbox"/> G - Grey <input type="checkbox"/> B - Black |
| LUMEN OUTPUT SOURCE | 550lm (3000°K, 350mA) |
| DELIVERED LUMEN OUTPUT | 510lm (3000°K, 350mA, 50°) 5 |
| LED NUMBER | power LEDs |
| MATERIAL | painted aluminium |
| DRIVER | not included |
| POWER CABLE | included 0,50 mt. FEP 2 x 0,35 cable |
| WIRING | in series |
| MOUNTING | recessed (ceiling, wall) |
| NOTES | <ul style="list-style-type: none"> other RAL on request 10W - 500mA on request |


MADE IN ITALY

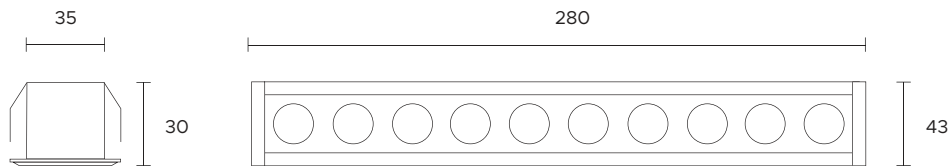

36x274 mm




| | | | | | | | | | | |
|-------------------------------|--|-----|---|---|--|--|--|-----|-----|-----|
| POWER SUPPLY | max 10W - max 350mA | | | | | | | | | |
| CODE | AV02024GN | | | | | | | | | |
| LED COLOUR | <ul style="list-style-type: none"> C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td style="text-align: center;">N</td> <td style="text-align: center;">M</td> <td style="text-align: center;">W</td> </tr> <tr> <td style="text-align: center;"></td> <td style="text-align: center;"></td> <td style="text-align: center;"></td> </tr> <tr> <td style="text-align: center;">12°</td> <td style="text-align: center;">35°</td> <td style="text-align: center;">50°</td> </tr> </table> | N | M | W | | | | 12° | 35° | 50° |
| N | M | W | | | | | | | | |
| | | | | | | | | | | |
| 12° | 35° | 50° | | | | | | | | |
| FINISHES | <ul style="list-style-type: none"> W - White G - Grey B - Black | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 1100lm (3000°K, 350mA) | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 1030lm (3000°K, 350mA, 50°) 10 | | | | | | | | | |
| LED NUMBER | power LEDs | | | | | | | | | |
| MATERIAL | painted aluminium | | | | | | | | | |
| DRIVER | not included | | | | | | | | | |
| POWER CABLE | included 0,50 mt. FEP 2 x 0,35 cable | | | | | | | | | |
| WIRING | in series | | | | | | | | | |
| MOUNTING | recessed (ceiling, wall) | | | | | | | | | |
| NOTES | <ul style="list-style-type: none"> other RAL on request 20W - 500mA on request | | | | | | | | | |

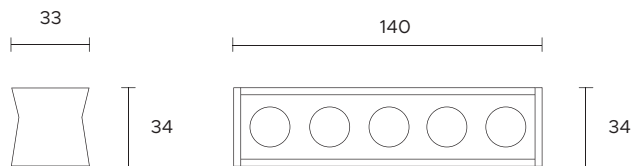

| | | | | | | | | | | |
|-------------------------------|---|-----|---|---|--|--|--|-----|-----|-----|
| POWER SUPPLY | max 5W - max 350mA | | | | | | | | | |
| CODE | AV02327GN | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>12°</td> <td>35°</td> <td>50°</td> </tr> </table> | N | M | W | | | | 12° | 35° | 50° |
| N | M | W | | | | | | | | |
| | | | | | | | | | | |
| 12° | 35° | 50° | | | | | | | | |
| FINISHES | W - White G - Grey B - Black | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 550lm (3000°K, 350mA) | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 510lm (3000°K, 350mA, 50°) | | | | | | | | | |
| LED NUMBER | 5 power LEDs | | | | | | | | | |
| MATERIAL | painted aluminium | | | | | | | | | |
| DRIVER | not included | | | | | | | | | |
| POWER CABLE | included 0,50 mt. FEP 2 x 0,35 cable | | | | | | | | | |
| WIRING | in series | | | | | | | | | |
| MOUNTING | surface (ceiling, wall) | | | | | | | | | |
| NOTES | other RAL on request | | | | | | | | | |

MADE IN ITALY

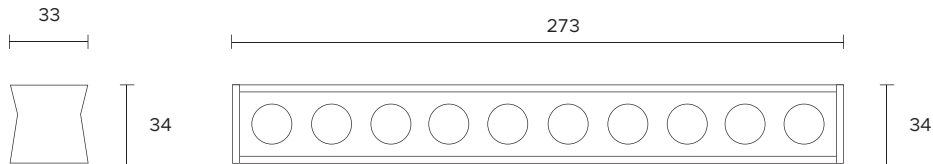

POWER SUPPLY max 10W - max 350mA

CODE AV02328GN

LED COLOUR

- C - Cool white 5500°K
- N - Natural white 4000°K
- W - Warm white 3000°K
- H - Warm white 3000°K - CRI90
- Y - Warm white 2700°K
- A - Amber
- R - Red
- G - Green
- B - Blue

OPTICS

| | | |
|-----|-----|-----|
| N | M | W |
| | | |
| 12° | 35° | 50° |

FINISHES

- W - White
- G - Grey
- B - Black

LUMEN OUTPUT SOURCE 1100lm (3000°K, 350mA)

DELIVERED LUMEN OUTPUT 1030lm (3000°K, 350mA, 50°)

LED NUMBER 10 power LEDs

MATERIAL painted aluminium

DRIVER not included

POWER CABLE included 0,50 mt. FEP 2 x 0,35 cable

WIRING in series

MOUNTING surface (ceiling, wall)

NOTES other RAL on request







Outdoor



Spotlights
pag. 109



Spotlights
pag. 110



Spotlights
pag. 111



Spotlights
pag. 112



Spotlights
pag. 113



Spotlights
pag. 114



Spotlights
pag. 115



Spotlights
pag. 116



Spotlights
pag. 117



Spotlights
pag. 118



Spotlights
pag. 119



Inox Spotlights
pag. 121



Inox Spotlights
pag. 122



Inox Spotlights
pag. 123



Inox Spotlights
pag. 124



Inox Spotlights
pag. 125



Inox Spotlights
pag.126



Accessories
pag. 127-128



Architectural Lights
pag. 131



Architectural Lights
pag. 132



Architectural Lights
pag. 133



Floor Recessed
pag. 135



Floor Recessed
pag. 136



Floor Recessed
pag. 137



Floor Recessed
pag. 138



Floor Recessed
pag. 139



Floor Recessed
pag. 140



Floor Recessed
pag. 141



Floor Recessed
pag. 142



Floor Recessed
pag. 143



Floor Recessed
pag. 144



Floor Recessed
pag. 145



Floor Recessed
pag. 146



Floor Recessed
pag. 147



Floor Recessed
pag. 148



Floor Recessed
pag. 149



Floor Recessed
pag. 150



Floor Recessed
pag. 151



Floor Recessed
pag. 152



Floor Recessed
pag. 153



Floor Recessed
pag. 154



Floor Recessed
pag. 155



Floor Recessed
pag. 156



Floor Recessed
pag. 157



Floor Recessed
pag. 158



Grazing Lights
pag. 161



Grazing Lights
pag. 162



Grazing Lights
pag. 163



Grazing Lights
pag. 164



Grazing Lights
pag. 165



Ceiling recessed
pag. 167



Ceiling recessed
pag. 168



Ceiling recessed
pag. 169



Ceiling recessed
pag. 170



Ceiling recessed
pag. 171



Ceiling recessed
pag. 172



Ceiling recessed
pag. 173



Ceiling recessed
pag. 174



Ceiling recessed
pag. 175



Ceiling recessed
pag. 176



Ceiling recessed
pag. 177



Ceiling recessed
pag. 178



Wall Recessed
pag. 182-183



Wall Recessed
pag. 184-185



Wall Recessed
pag. 186



Linear Lights
pag. 189



Linear Lights
pag. 190




Linear Lights
pag. 191



Linear Lights
pag. 192




Linear Lights
pag. 193



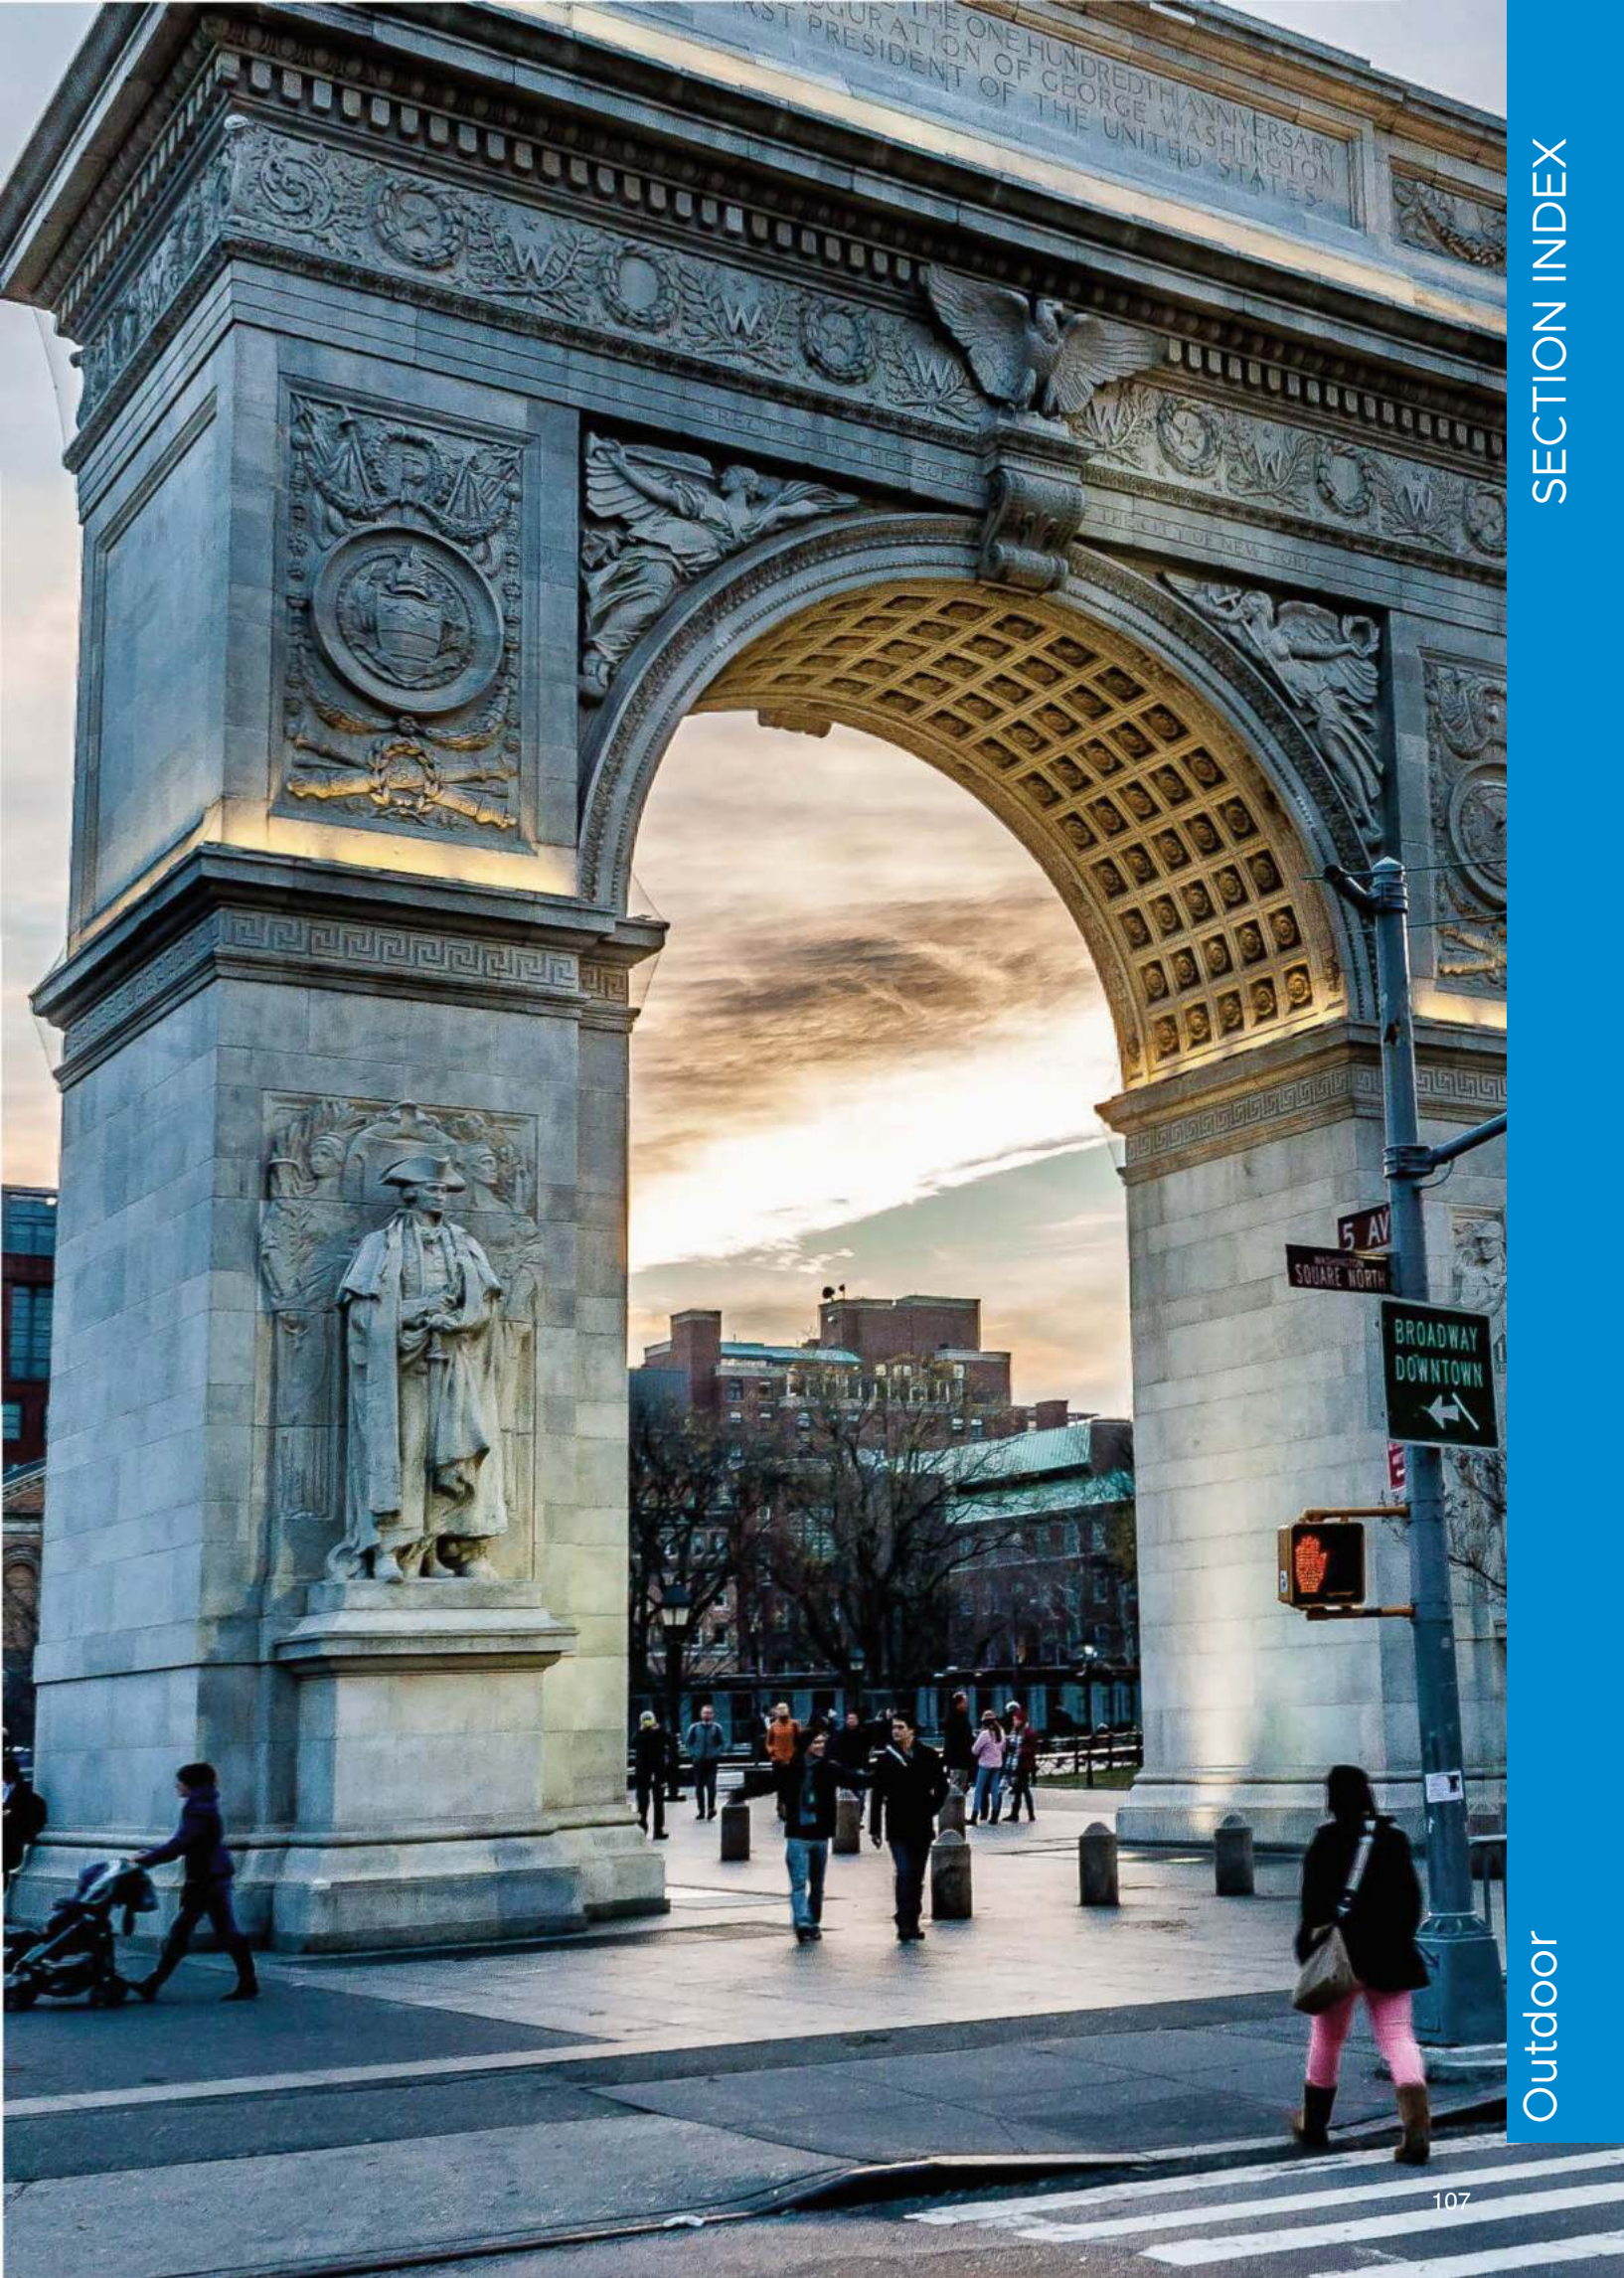


Spotlights

Outdoor - Spotlights

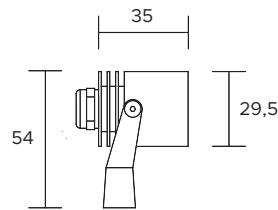


| | | | | | | | | | | | | | | | | | | | |
|-------------------------------|---|-----|-----|------|-------|---|---|--|--|--|--|--|--|-----|-----|-----|-----|------|-------|
| POWER SUPPLY | max 3W - max 700mA | | | | | | | | | | | | | | | | | | |
| CODE | AV01001GN | | | | | | | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue | | | | | | | | | | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>T</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> <td>Diff.</td> </tr> </table> | N | M | W | X | T | D | | | | | | | 10° | 25° | 40° | 60° | 110° | Diff. |
| N | M | W | X | T | D | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | 110° | Diff. | | | | | | | | | | | | | | |
| FINISHES | G - Grey B - Black | | | | | | | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 190lm (3000°K, 700mA) | | | | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 160lm (3000°K, 700mA, 40°) | | | | | | | | | | | | | | | | | | |
| LED NUMBER | 1 power LED | | | | | | | | | | | | | | | | | | |
| MATERIAL | body and flange in anodized aluminium | | | | | | | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | | | | | | | |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable | | | | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | | | | |
| MOUNTING | surface (ceiling, wall, floor) | | | | | | | | | | | | | | | | | | |
| ACCESSORIES | see pag. 127 - 128 | | | | | | | | | | | | | | | | | | |
| NOTES | 24V version on request | | | | | | | | | | | | | | | | | | |

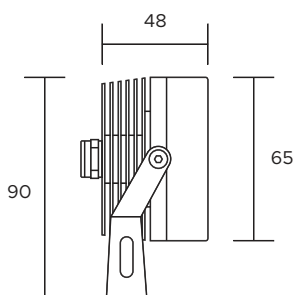


| | | | | | | | | | | | | | | | | | | | |
|-------------------------------|--|-----|-----|------|-------|---|---|--|--|--|--|--|--|-----|-----|-----|-----|------|-------|
| POWER SUPPLY | max 6W - max 500mA | | | | | | | | | | | | | | | | | | |
| CODE | AV01003GN | | | | | | | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue | | | | | | | | | | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td><td>M</td><td>W</td><td>X</td><td>T</td><td>D</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>10°</td><td>25°</td><td>40°</td><td>60°</td><td>110°</td><td>Diff.</td> </tr> </table> | N | M | W | X | T | D | | | | | | | 10° | 25° | 40° | 60° | 110° | Diff. |
| N | M | W | X | T | D | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | 110° | Diff. | | | | | | | | | | | | | | |
| FINISHES | G - Grey B - Black | | | | | | | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 450lm (3000°K, 500mA) | | | | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 420lm (3000°K, 500mA, 40°) | | | | | | | | | | | | | | | | | | |
| LED NUMBER | 3 power LEDs | | | | | | | | | | | | | | | | | | |
| MATERIAL | body and flange in anodized aluminium | | | | | | | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | | | | | | | |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable | | | | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | | | | |
| MOUNTING | surface (ceiling, wall, floor) | | | | | | | | | | | | | | | | | | |
| ACCESSORIES | see pag. 127 - 128 | | | | | | | | | | | | | | | | | | |
| NOTES | 24V version on request | | | | | | | | | | | | | | | | | | |

| | | | | | | | | | | | | | | | | | | | |
|-------------------------------|--|-----|-----|------|-------|---|---|--|--|--|--|--|--|-----|-----|-----|-----|------|-------|
| POWER SUPPLY | max 9W - max 700mA | | | | | | | | | | | | | | | | | | |
| CODE | AV01003GN | | | | | | | | | | | | | | | | | | |
| LED COLOUR | 1 - RGB 2 - AWB 3 - A WW W | | | | | | | | | | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td><td>M</td><td>W</td><td>X</td><td>T</td><td>D</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>10°</td><td>25°</td><td>40°</td><td>60°</td><td>110°</td><td>Diff.</td> </tr> </table> | N | M | W | X | T | D | | | | | | | 10° | 25° | 40° | 60° | 110° | Diff. |
| N | M | W | X | T | D | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | 110° | Diff. | | | | | | | | | | | | | | |
| FINISHES | G - Grey - B - Black | | | | | | | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 390lm (RGB, 700mA) | | | | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 360lm (RGB, 700mA, 40°) | | | | | | | | | | | | | | | | | | |
| LED NUMBER | 3 power LEDs | | | | | | | | | | | | | | | | | | |
| MATERIAL | body and flange in anodized aluminium | | | | | | | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | | | | | | | |
| POWER CABLE | includes 1,5 mt Liyy-AD8 6 x 0,35 cable | | | | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | | | | |
| MOUNTING | surface (ceiling, wall, floor) | | | | | | | | | | | | | | | | | | |
| ACCESSORIES | see pag. 127 - 128 | | | | | | | | | | | | | | | | | | |

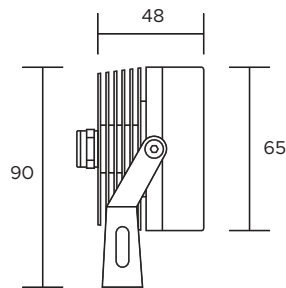

| | | | | | | | | | | | | | | | | |
|-------------------------------|---|-----|------|-------|---|---|--|--|--|--|--|-----|-----|-----|------|-------|
| POWER SUPPLY | max 8W - max 500mA | | | | | | | | | | | | | | | |
| CODE | AV01004GN | | | | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue | | | | | | | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>T</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>110°</td> <td>Diff.</td> </tr> </table> | N | M | W | T | D | | | | | | 10° | 25° | 40° | 110° | Diff. |
| N | M | W | T | D | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| 10° | 25° | 40° | 110° | Diff. | | | | | | | | | | | | |
| FINISHES | G - Grey B - Black | | | | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 600lm (3000°K, 500mA) | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 550lm (3000°K, 500mA, 40°) | | | | | | | | | | | | | | | |
| LED NUMBER | 4 power LEDs | | | | | | | | | | | | | | | |
| MATERIAL | body and flange in anodized aluminium | | | | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | | | | |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0.50 cable | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | |
| MOUNTING | surface (ceiling, wall, floor) | | | | | | | | | | | | | | | |
| ACCESSORIES | see pag. 127 - 128 | | | | | | | | | | | | | | | |
| NOTES | 24V version on request | | | | | | | | | | | | | | | |

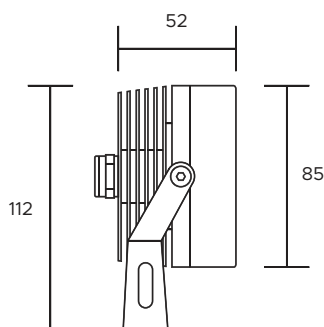




A A+ A++

| | |
|-------------------------------|---|
| POWER SUPPLY | max 12W - max 500mA |
| CODE | AV01005GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue |
| OPTICS | N M W X T D 10° 25° 40° 60° 110° Diff. |
| FINISHES | G - Grey B - Black |
| LUMEN OUTPUT SOURCE | 900lm (3000°K, 500mA) |
| DELIVERED LUMEN OUTPUT | 860lm (3000°K, 500mA, 40°) |
| LED NUMBER | 6 power LEDs |
| MATERIAL | body in and flange anodized aluminium |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable |
| WIRING | in series |
| MOUNTING | surface (ceiling, wall, floor) |
| ACCESSORIES | see pag. 127 - 128 |
| NOTES | 24V version on request |




A A+ A++

| | |
|-------------------------------|---|
| POWER SUPPLY | max 18W - max 700mA |
| CODE | AV01005GN |
| LED COLOUR | 1 - RGB 2 - AWB 3 - A WW W |
| OPTICS | N M W X T D 10° 25° 40° 60° 110° Diff. |
| FINISHES | G - Grey B - Black |
| LUMEN OUTPUT SOURCE | 780lm (RGB, 700mA) |
| DELIVERED LUMEN OUTPUT | 720lm (RGB, 700mA, 40°) |
| LED NUMBER | 6 power LEDs |
| MATERIAL | body and flange in anodized aluminium |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Liyy-AD8 6 x 0,35 cable |
| WIRING | in series |
| MOUNTING | surface (ceiling, wall, floor) |
| ACCESSORIES | see pag. 127 - 128 |
| NOTES | |

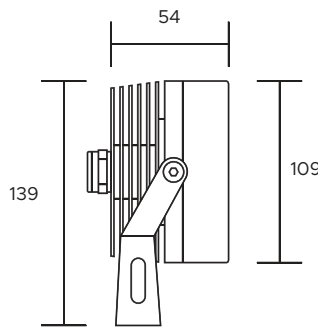

| | |
|-------------------------------|---|
| POWER SUPPLY | max 18W - max 500mA |
| CODE | AV01006GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue |
| OPTICS | N 10° M 25° W 40° X 60° T 110° D Diff. |
| FINISHES | G - Grey B - Black |
| LUMEN OUTPUT SOURCE | 1350lm (3000°K, 500mA) |
| DELIVERED LUMEN OUTPUT | 1300lm (3000°K, 500mA, 40°) |
| LED NUMBER | 9 power LEDs |
| MATERIAL | body and flange in anodized aluminium |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable |
| WIRING | in series |
| MOUNTING | surface (ceiling, wall, floor) |
| ACCESSORIES | see pag. 127 - 128 |
| NOTES | |

| | |
|-------------------------------|---|
| POWER SUPPLY | max 27W - max 700mA |
| CODE | AV01006GN |
| LED COLOUR | 1 - RGB 2 - AWB 3 - A WW W |
| OPTICS | N 10° M 25° W 40° X 60° T 110° D Diff. |
| FINISHES | G - Grey B - Black |
| LUMEN OUTPUT SOURCE | 1170lm (RGB, 700mA) |
| DELIVERED LUMEN OUTPUT | 1080lm (RGB, 700mA, 40°) |
| LED NUMBER | 9 power LEDs |
| MATERIAL | body and flange in anodized aluminium |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Liyy-AD8 6 x 0,35 cable |
| WIRING | in series |
| MOUNTING | surface (ceiling, wall, floor) |
| ACCESSORIES | see pag. 127 - 128 |
| NOTES | |

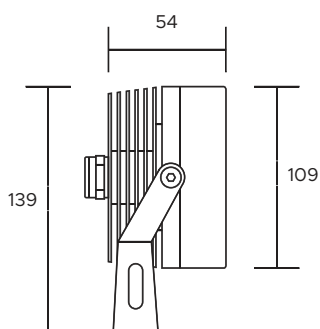


A A+ A++

| | |
|-------------------------------|---|
| POWER SUPPLY | max 24W - max 500mA |
| CODE | AV01007GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue |
| OPTICS | N 10° M 25° W 40° X 60° T 110° D Diff. |
| FINISHES | G - Grey B - Black |
| LUMEN OUTPUT SOURCE | 1800lm (3000°K, 500mA) |
| DELIVERED LUMEN OUTPUT | 1690lm (3000°K, 500mA, 40°) |
| LED NUMBER | 12 power LEDs |
| MATERIAL | body and flange in anodized aluminium |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable |
| WIRING | in series |
| MOUNTING | surface (ceiling, wall, floor) |
| ACCESSORIES | see pag. 127 - 128 |
| NOTES | 24V version on request |





A A+ A++


| | |
|-------------------------------|---|
| POWER SUPPLY | max 36W - max 700mA |
| CODE | AV01007GN |
| LED COLOUR | 1 - RGB 2 - AWB 3 - A WW W |
| OPTICS | N 10° M 25° W 40° X 60° T 110° D Diff. |
| FINISHES | G - Grey B - Black |
| LUMEN OUTPUT SOURCE | 1560lm (RGB, 700mA) |
| DELIVERED LUMEN OUTPUT | 1440lm (RGB, 700mA, 40°) |
| LED NUMBER | 12 power LEDs |
| MATERIAL | body and flange in anodized aluminium |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Liyy-AD8 6 x 0,35 cable |
| WIRING | in series |
| MOUNTING | surface (ceiling, wall, floor) |
| ACCESSORIES | see pag. 127 - 128 |

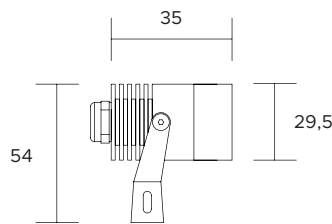


| | | | | | | | | | | | | | | | | | | | |
|-------------------------------|---|-----|-----|------|-------|---|---|--|--|--|--|--|--|-----|-----|-----|-----|------|-------|
| POWER SUPPLY | max 3W - max 700mA | | | | | | | | | | | | | | | | | | |
| CODE | AV01029GN | | | | | | | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue | | | | | | | | | | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>T</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> <td>Diff.</td> </tr> </table> | N | M | W | X | T | D | | | | | | | 10° | 25° | 40° | 60° | 110° | Diff. |
| N | M | W | X | T | D | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | 110° | Diff. | | | | | | | | | | | | | | |
| FINISHES | G - Grey B - Black | | | | | | | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 190lm (3000°K, 700mA) | | | | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 160lm (3000°K, 700mA, 40°) | | | | | | | | | | | | | | | | | | |
| LED NUMBER | 1 power LED | | | | | | | | | | | | | | | | | | |
| MATERIAL | body and flange in anodized aluminium | | | | | | | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | | | | | | | |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable | | | | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | | | | |
| MOUNTING | surface (ceiling, wall, floor) | | | | | | | | | | | | | | | | | | |
| ACCESSORIES | see pag. 127 - 128 | | | | | | | | | | | | | | | | | | |
| NOTES | 24V version on request | | | | | | | | | | | | | | | | | | |

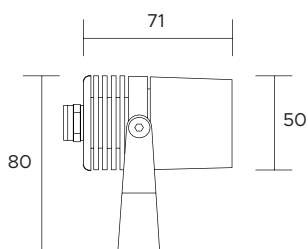


| | |
|------------------------------|--|
| POWER SUPPLY | max 3W - max 700mA |
| CODE | AV01039GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K |
| OPTICS | S  |
| FINISHES | G - Grey B - Black |
| LUMEN OUTPUT SOURCE | 190lm (3000°K, 700mA) |
| DELIVERD LUMEN OUTPUT | 130lm (3000°K, 700mA, 3°) |
| LED NUMBER | 1 power LED |
| MATERIAL | body and flange in anodized aluminium |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,75 cable |
| WIRING | in series |
| MOUNTING | surface (ceiling, wall, floor) |
| ACCESSORIES | see pag. 127 - 128 |
| NOTES | 24V version on request |


| | |
|------------------------------|--|
| POWER SUPPLY | max 6W - max 700mA |
| CODE | AV01490GN |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K |
| OPTICS | N M W  |
| FINISHES | G - Grey B - Black |
| LUMEN OUTPUT SOURCE | 800lm (3000°K, 700mA) |
| DELIVERD LUMEN OUTPUT | 430lm (3000°K, 700mA, 25°) |
| LED NUMBER | 1 power LED multichip |
| MATERIAL | body and flange in anodized aluminium |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,75 cable |
| WIRING | in series |
| MOUNTING | surface (ceiling, wall, floor) |
| ACCESSORIES | see pag. 127 - 128 |
| NOTES | 24V version on request |

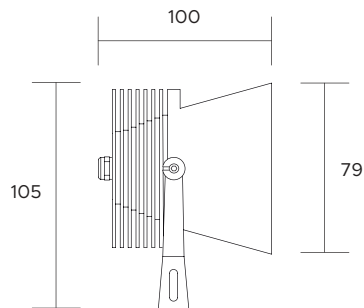

| | | | | | | | | | | |
|-------------------------------|--|-----|---|---|--|--|--|-----|-----|-----|
| POWER SUPPLY | max 10W - 220V/240V | | | | | | | | | |
| CODE | AV01030GN | | | | | | | | | |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>30°</td> <td>45°</td> </tr> </table> | N | M | W | | | | 15° | 30° | 45° |
| N | M | W | | | | | | | | |
| | | | | | | | | | | |
| 15° | 30° | 45° | | | | | | | | |
| FINISHES | G - Grey B - Black | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 1260lm (3000°K, 250mA) | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 830lm (3000°K, 250mA, 45°) | | | | | | | | | |
| LED NUMBER | 1 power LED multichip | | | | | | | | | |
| MATERIAL | body and flange in anodized aluminium | | | | | | | | | |
| DRIVER | included | | | | | | | | | |
| POWER CABLE | includes 1,5 mt H05RN-F 3 x 0,75 cable | | | | | | | | | |
| MOUNTING | surface (ceiling, wall, floor) | | | | | | | | | |
| ACCESSORIES | see pag. 127 - 128 | | | | | | | | | |
| NOTES | | | | | | | | | | |

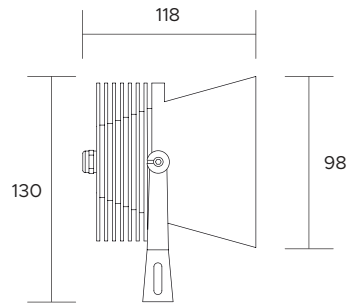


| | | | | | | | | | | |
|-------------------------------|--|-----|---|---|--|--|--|-----|-----|-----|
| POWER SUPPLY | max 20W - 220V/240V | | | | | | | | | |
| CODE | AV01031GN | | | | | | | | | |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>30°</td> <td>45°</td> </tr> </table> | N | M | W | | | | 15° | 30° | 45° |
| N | M | W | | | | | | | | |
| | | | | | | | | | | |
| 15° | 30° | 45° | | | | | | | | |
| FINISHES | G - Grey B - Black | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 2480lm (3000°K, 500mA) | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 1940lm (3000°K, 500mA, 45°) | | | | | | | | | |
| LED NUMBER | 1 power LED multichip | | | | | | | | | |
| MATERIAL | body and flange in anodized aluminium | | | | | | | | | |
| DRIVER | included | | | | | | | | | |
| POWER CABLE | includes 1,5 mt H05RN-F 3 x 0,75 cable | | | | | | | | | |
| MOUNTING | surface (ceiling, wall, floor) | | | | | | | | | |
| ACCESSORIES | see pag. 127 - 128 | | | | | | | | | |
| NOTES | | | | | | | | | | |

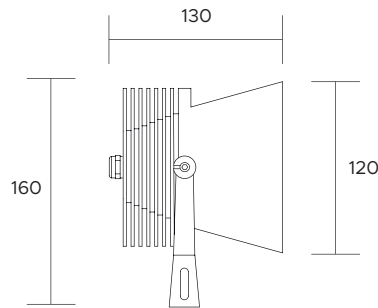


| | | | | | | | | | | |
|-------------------------------|--|-----|---|---|--|--|--|-----|-----|-----|
| POWER SUPPLY | max 30W - 220V/240V | | | | | | | | | |
| CODE | AV01479GN | | | | | | | | | |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CR190 Y - Warm white 2700°K | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>30°</td> <td>45°</td> </tr> </table> | N | M | W | | | | 15° | 30° | 45° |
| N | M | W | | | | | | | | |
| | | | | | | | | | | |
| 15° | 30° | 45° | | | | | | | | |
| FINISHES | G - Grey B - Black | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 3220lm (3000°K, 700mA) | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 2970lm (3000°K, 700mA, 45°) | | | | | | | | | |
| LED NUMBER | 1 power LED multichip | | | | | | | | | |
| MATERIAL | body and flange in anodized aluminium | | | | | | | | | |
| DRIVER | included | | | | | | | | | |
| POWER CABLE | includes 1,5 mt H05RN-F 3 x 0,75 cable | | | | | | | | | |
| MOUNTING | surface (ceiling, wall, floor) | | | | | | | | | |
| ACCESSORIES | see pag. 127 - 128 | | | | | | | | | |
| NOTES | | | | | | | | | | |

Inox spotlights






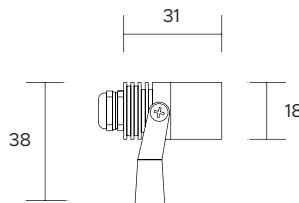

| | | | | | | | | | | | | | | | | |
|-------------------------------|---|-----|--------|-----|---|---|--|--|--|--|--|-----|-----|-----|--------|-----|
| POWER SUPPLY | max 1W - max 350mA | | | | | | | | | | | | | | | |
| CODE | AV01517GN | | | | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue | | | | | | | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>E</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>20°</td> <td>35°</td> <td>50°</td> <td>20x45°</td> <td>45°</td> </tr> </table> | N | M | W | E | D | | | | | | 20° | 35° | 50° | 20x45° | 45° |
| N | M | W | E | D | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| 20° | 35° | 50° | 20x45° | 45° | | | | | | | | | | | | |
| FINISHES | I - Inox AISI 316L | | | | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 110lm (3000°K, 350mA) | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 100lm (3000°K, 350mA, 35°) | | | | | | | | | | | | | | | |
| LED NUMBER | 1 power LED | | | | | | | | | | | | | | | |
| MATERIAL | Inox AISI 316L | | | | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | | | | |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,25 cable | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | |
| MOUNTING | surface (ceiling, wall, floor) | | | | | | | | | | | | | | | |
| ACCESSORIES | see pag. 127 - 128 | | | | | | | | | | | | | | | |
| NOTES | | | | | | | | | | | | | | | | |


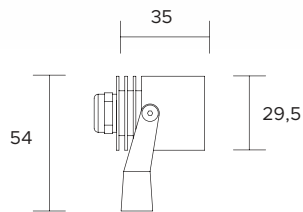


| | | | | | | | | | | | | | | | | | | | |
|-------------------------------|---|-----|-----|------|-------|---|---|--|--|--|--|--|--|-----|-----|-----|-----|------|-------|
| POWER SUPPLY | max 2W - max 500mA | | | | | | | | | | | | | | | | | | |
| CODE | AV01348GN | | | | | | | | | | | | | | | | | | |
| LED COLOUR | <ul style="list-style-type: none"> C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue | | | | | | | | | | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>T</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> <td>Diff.</td> </tr> </table> | N | M | W | X | T | D | | | | | | | 10° | 25° | 40° | 60° | 110° | Diff. |
| N | M | W | X | T | D | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | 110° | Diff. | | | | | | | | | | | | | | |
| FINISHES | I - Inox AISI 316L | | | | | | | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 150lm (3000°K, 500mA) | | | | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 120lm (3000°K, 500mA, 40°) | | | | | | | | | | | | | | | | | | |
| LED NUMBER | 1 power LED | | | | | | | | | | | | | | | | | | |
| MATERIAL | Inox AISI 316L | | | | | | | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | | | | | | | |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable | | | | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | | | | |
| MOUNTING | surface (ceiling, wall, floor) | | | | | | | | | | | | | | | | | | |
| ACCESSORIES | see pag. 127 - 128 | | | | | | | | | | | | | | | | | | |
| NOTES | 24V version on request | | | | | | | | | | | | | | | | | | |

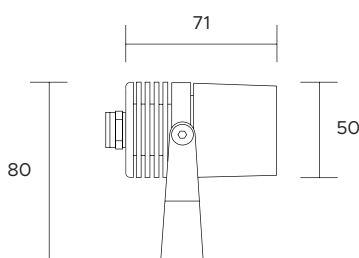


| | |
|------------------------------|--|
| POWER SUPPLY | max 3W - max 700mA |
| CODE | AV01475GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K |
| OPTICS | 3° |
| FINISHES | I - Inox AISI 316L |
| LUMEN OUTPUT SOURCE | 190lm (3000°K, 700mA) |
| DELIVERD LUMEN OUTPUT | 130lm (3000°K, 700mA, 3°) |
| LED NUMBER | 1 power LED |
| MATERIAL | Inox AISI 316L |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable |
| WIRING | in series |
| MOUNTING | surface (ceiling, wall, floor) |
| ACCESSORIES | see pag. 127 - 128 |
| NOTES | 24V version on request |

| | |
|------------------------------|--|
| POWER SUPPLY | max 6W - max 700mA |
| CODE | AV01512GN |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K |
| OPTICS | 15° 25° 40° |
| FINISHES | I - Inox AISI 316L |
| LUMEN OUTPUT SOURCE | 800lm (3000°K, 700mA) |
| DELIVERD LUMEN OUTPUT | 430lm (3000°K, 700mA, 25°) |
| LED NUMBER | 1 power LED multichip |
| MATERIAL | Inox AISI 316L |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable |
| WIRING | in series |
| MOUNTING | surface (ceiling, wall, floor) |
| ACCESSORIES | see pag. 127 - 128 |
| NOTES | 24V version on request |

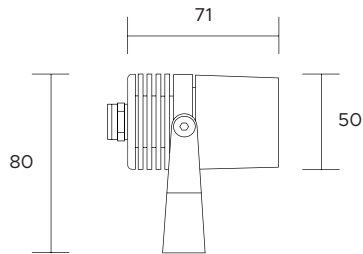


| | | | | | | | | | | | |
|------------------------------|---|-----|------|-------|---|---|-----|-----|-----|------|-------|
| POWER SUPPLY | max 6W - max 500mA | | | | | | | | | | |
| CODE | AVO1473GN | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue | | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>T</td> <td>D</td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> <td>110°</td> <td>Diff.</td> </tr> </table> | N | M | W | T | D | 15° | 25° | 40° | 110° | Diff. |
| N | M | W | T | D | | | | | | | |
| 15° | 25° | 40° | 110° | Diff. | | | | | | | |
| FINISHES | I - Inox AISI 316L | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 450lm (3000°K, 500mA) | | | | | | | | | | |
| DELIVERD LUMEN OUTPUT | 350lm (3000°K, 500mA, 40°) | | | | | | | | | | |
| LED NUMBER | 3 power LEDs | | | | | | | | | | |
| MATERIAL | Inox AISI 316L | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | |
| MOUNTING | surface (ceiling, wall, floor) | | | | | | | | | | |
| ACCESSORIES | ee pag. 127- 128 | | | | | | | | | | |
| NOTES | 24V version on request | | | | | | | | | | |

| | | | | | | | | | | | |
|------------------------------|--|-----|------|-------|---|---|-----|-----|-----|------|-------|
| POWER SUPPLY | max 9W - max 700mA | | | | | | | | | | |
| CODE | AVO1518GN | | | | | | | | | | |
| LED COLOUR | 1 - RGB 2 - AWB 3 - A WW W | | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>T</td> <td>D</td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> <td>110°</td> <td>Diff.</td> </tr> </table> | N | M | W | T | D | 15° | 25° | 40° | 110° | Diff. |
| N | M | W | T | D | | | | | | | |
| 15° | 25° | 40° | 110° | Diff. | | | | | | | |
| FINISHES | I - Inox AISI 316L | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 390lm (3000°K, 700mA) | | | | | | | | | | |
| DELIVERD LUMEN OUTPUT | 360lm (3000°K, 700mA, 40°) | | | | | | | | | | |
| LED NUMBER | 3 power LEDs | | | | | | | | | | |
| MATERIAL | Inox AISI 316L | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | |
| POWER CABLE | includes 1,5 mt Liyy - AD8 6 x 0,35 cable | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | |
| MOUNTING | surface (ceiling, wall, floor) | | | | | | | | | | |
| ACCESSORIES | see pag. 127 - 128 | | | | | | | | | | |

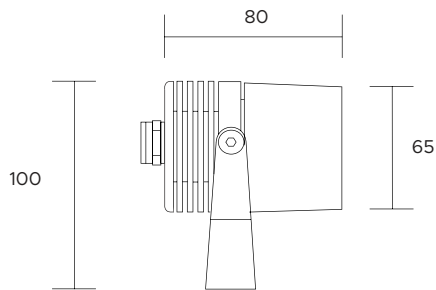

| | | | | | | | | | | |
|-------------------------------|--|-----|---|---|--|--|--|-----|-----|-----|
| POWER SUPPLY | max 10W - max 250mA | | | | | | | | | |
| CODE | AV01471GN | | | | | | | | | |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>30°</td> <td>45°</td> </tr> </table> | N | M | W | | | | 15° | 30° | 45° |
| N | M | W | | | | | | | | |
| | | | | | | | | | | |
| 15° | 30° | 45° | | | | | | | | |
| FINISHES | I - Inox AISI 316L | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 1260lm (3000°K, 250mA) | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 830lm (3000°K, 250mA, 45°) | | | | | | | | | |
| LED NUMBER | 1 power LED multichip | | | | | | | | | |
| MATERIAL | Inox AISI 316L | | | | | | | | | |
| DRIVER | not included | | | | | | | | | |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable | | | | | | | | | |
| WIRING | in series | | | | | | | | | |
| MOUNTING | surface (ceiling, wall, floor) | | | | | | | | | |
| ACCESSORIES | see pag. 127 - 128 | | | | | | | | | |
| NOTES | 24V version on request | | | | | | | | | |

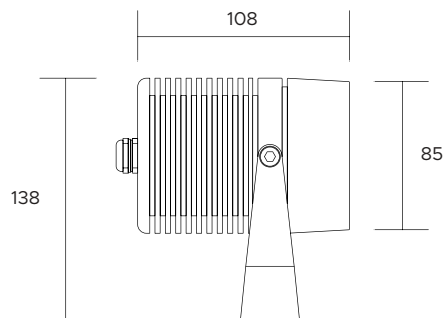

| | | | | | | | | | | |
|-------------------------------|--|-----|---|---|--|--|--|-----|-----|-----|
| POWER SUPPLY | max 20W - 220V / 240V | | | | | | | | | |
| CODE | AV01519GN | | | | | | | | | |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>30°</td> <td>45°</td> </tr> </table> | N | M | W | | | | 15° | 30° | 45° |
| N | M | W | | | | | | | | |
| | | | | | | | | | | |
| 15° | 30° | 45° | | | | | | | | |
| FINISHES | I - Inox AISI 316L | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 2480lm (3000°K, 500mA) | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 1940lm (3000°K, 500mA, 45°) | | | | | | | | | |
| LED NUMBER | 1 power LED multichip | | | | | | | | | |
| MATERIAL | Inox AISI 316L | | | | | | | | | |
| DRIVER | included | | | | | | | | | |
| POWER CABLE | includes 1,5 mt H05RN-F 3 x 0,75 cable | | | | | | | | | |
| WIRING | | | | | | | | | | |
| MOUNTING | surface (ceiling, wall, floor) | | | | | | | | | |
| ACCESSORIES | see pag. 127 - 128 | | | | | | | | | |
| NOTES | | | | | | | | | | |

Accessories

Installation

Code: **AV01461GN**

Inox stake for:

 SPOTLIGHTS INOX
 SPOTLIGHTS
Code: **AV01462GN**

Inox stake for:


 SPOTLIGHTS INOX
 SPOTLIGHTS
Code: **AV01463GN**

Inox stake for:

 SPOTLIGHTS INOX
 SPOTLIGHTS
Code: **AV01487GN**

Extension for:

 SPOTLIGHTS INOX
 SPOTLIGHTS

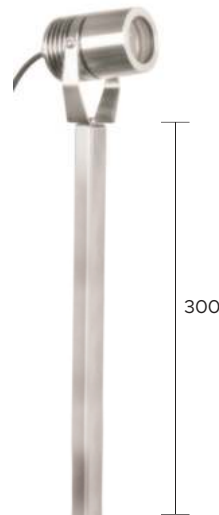 200 mm in the ground + 150mm
Code: **AV01488GN**

Extension for:

 SPOTLIGHTS INOX
 SPOTLIGHTS

 200 mm in the ground + 300mm

Accessories

Antiglare

Code: **AV01484GN**

Inox anti-glare cap for:

AV01475GN, AV01512GN
AV01473GN, AV01518GNCode: **AV01483GN**

Hex louvers for:

AV01475GN, AV01512GN
AV01473GN, AV01518GNCode: **AV01486GN**

Inox anti-glare cap for:

AV01471GN

Code: **AV01485GN**

Hex louvers for:

AV01471GN

Tree Light Belt


Code: **AV01515GN**5m x 35mm belt to fix the
device to the tree trunk,
equipped with buckle - for:SPOTLIGHTS INOX
SPOTLIGHTSCode: **AV01573GN**5m x 25mm belt to fix the
device to the tree trunk,
equipped with buckle - for:SPOTLIGHTS INOX
SPOTLIGHTSCode: **AV01516GN**

Fixing plate for:

SPOTLIGHTS INOX
SPOTLIGHTSCode: **AV01574GN**


Fixing plate for:


SPOTLIGHTS INOX
SPOTLIGHTS

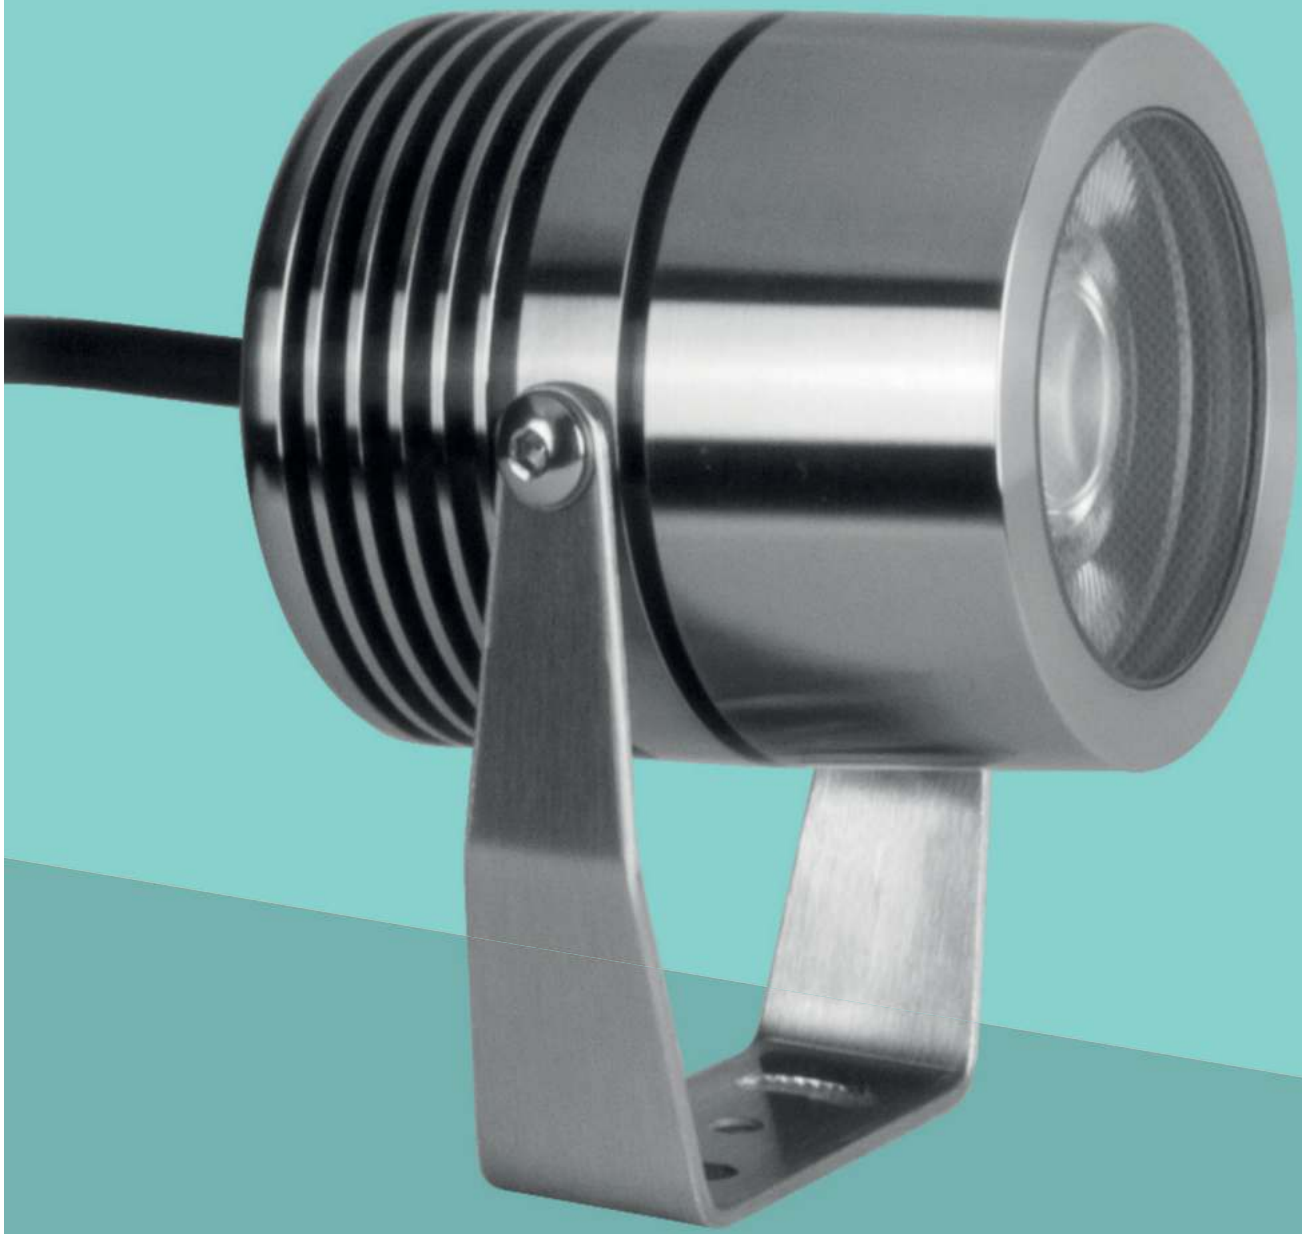


Architectural Lights


Outdoor - Architectural lights

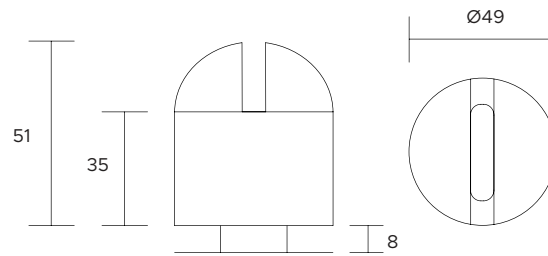


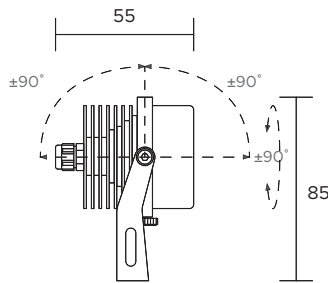
| | |
|------------------------------|--|
| POWER SUPPLY | max 3W - max 700mA |
| CODE | AV01045GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K |
| OPTICS |  180°x8° |
| FINISHES | G - Grey B - Black |
| LUMEN OUTPUT SOURCE | 190lm (3000°K, 700mA) |
| DELIVERD LUMEN OUTPUT | 130lm (3000°K, 700mA, 180°x8°) |
| LED NUMBER | 1 power LED |
| MATERIAL | body in anodized aluminium |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable |
| WIRING | in series |
| MOUNTING | surface (ceiling, wall, floor) |
| NOTES | other RAL on request |




| | |
|------------------------------|--|
| POWER SUPPLY | max 3W - 24V |
| CODE | AV01044GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K |
| OPTICS |  180°x8° |
| FINISHES | G - Grey B - Black |
| LUMEN OUTPUT SOURCE | 190lm (3000°K, 700mA) |
| DELIVERD LUMEN OUTPUT | 130lm (3000°K, 700mA, 180°x8°) |
| LED NUMBER | 1 power LED |
| MATERIAL | body in anodized aluminium |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable |
| WIRING | in parallel |
| MOUNTING | surface (ceiling, wall, floor) |
| NOTES | other RAL on request |

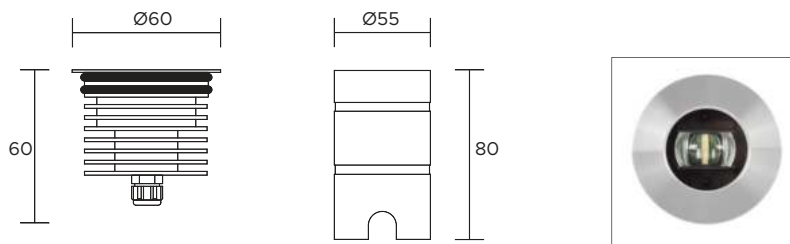

| | |
|------------------------------|--|
| POWER SUPPLY | max 3W - max 700mA |
| CODE | AV01046GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K |
| OPTICS |  L 120°x8° |
| FINISHES | I - Inox AISI 316L |
| LUMEN OUTPUT SOURCE | 190lm (3000°K, 700mA) |
| DELIVERD LUMEN OUTPUT | 130lm (3000°K, 700mA, 120°x8°) |
| LED NUMBER | 1 power LED |
| MATERIAL | body in anodized aluminium, flange in Inox AISI 316L |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable |
| WIRING | in series |
| MOUNTING | recessed (wall, floor) |
| ACCESSORIES | outer case code: AV01489GN |
| NOTES | 24V version on request |





| | |
|------------------------------|--|
| POWER SUPPLY | max 3W - max 700mA |
| CODE | AV01047GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K |
| OPTICS |  120°x8° |
| FINISHES | G - Grey B - Black |
| LUMEN OUTPUT SOURCE | 190lm (3000°K, 700mA) |
| DELIVERD LUMEN OUTPUT | 130lm (3000°K, 700mA, 120°x8°) |
| LED NUMBER | 1 power LED |
| MATERIAL | body and flange in anodized aluminium |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable |
| WIRING | in series |
| ACCESSORIES | |
| MOUNTING | surface (ceiling, wall, floor) |
| NOTES | 24V version available on request |

Floor Recessed




Outdoor - Floor recessed



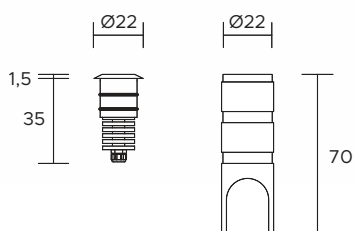


| | |
|-------------------------------|---|
| POWER SUPPLY | max 1W - max 350mA |
| CODE | AV01401GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue |
| OPTICS | M 20° W 35° X 50° E 20°x45° T 110° D Diff. |
| FINISHES | G - Grey B - Black |
| LUMEN OUTPUT SOURCE | 110lm(3000°K, 350mA) |
| DELIVERED LUMEN OUTPUT | 100lm (3000°K, 350mA, 35°) |
| LED NUMBER | 1 power LED |
| MATERIAL | body and flange in anodized aluminium |
| DRIVER | not included |
| POWER CABLE | includes 0,5 mt Sub4 FROST-UV 2 x 0,25 cable |
| WIRING | in series |
| MOUNTING | recessed (floor) |
| ACCESSORIES | outer case code: AV01179GN |
| NOTES | |

| | |
|-------------------------------|---|
| POWER SUPPLY | max 1W - max 350mA |
| CODE | AV01402GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue |
| OPTICS | M 20° W 35° X 50° E 20°x45° T 110° D Diff. |
| FINISHES | I - Inox AISI 316L |
| LUMEN OUTPUT SOURCE | 110lm (3000°K, 350mA) |
| DELIVERED LUMEN OUTPUT | 100lm (3000°K, 350mA, 35°) |
| LED NUMBER | 1 power LED |
| MATERIAL | body in anodized aluminium, flange in Inox AISI 316L |
| DRIVER | not included |
| POWER CABLE | includes 0,5 mt Sub4 FROST-UV 2 x 0,25 cable |
| WIRING | in series |
| MOUNTING | recessed (floor) |
| ACCESSORIES | outer case code: AV01179GN |
| NOTES | |

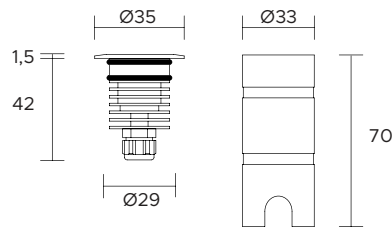


| | | | | | | | | | | | | | | | | | | | | | | |
|-------------------------------|---|-----|-----|---------|------|-------|---|---|--|--|--|--|--|--|--|-----|-----|-----|-----|---------|------|-------|
| POWER SUPPLY | max 2W - max 500mA | | | | | | | | | | | | | | | | | | | | | |
| CODE | AV01050GN | | | | | | | | | | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue | | | | | | | | | | | | | | | | | | | | | |
| OPTICS | <table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> <td>T</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>30°x65°</td> <td>110°</td> <td>Diff.</td> </tr> </table> | N | M | W | X | E | T | D | | | | | | | | 10° | 25° | 40° | 60° | 30°x65° | 110° | Diff. |
| N | M | W | X | E | T | D | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | 30°x65° | 110° | Diff. | | | | | | | | | | | | | | | | |
| FINISHES | G - Grey B - Black | | | | | | | | | | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 150lm (3000°K, 500mA) | | | | | | | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 120lm (3000°K, 500mA, 40°) | | | | | | | | | | | | | | | | | | | | | |
| LED NUMBER | 1 power LED | | | | | | | | | | | | | | | | | | | | | |
| MATERIAL | body and flange in anodized aluminium | | | | | | | | | | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | | | | | | | | | | |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable | | | | | | | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | | | | | | | |
| MOUNTING | recessed (floor) | | | | | | | | | | | | | | | | | | | | | |
| ACCESSORIES | outer case code: AV01403GN | | | | | | | | | | | | | | | | | | | | | |
| NOTES | 24V version on request | | | | | | | | | | | | | | | | | | | | | |




| | | | | | | | | | | | | | | | | | | | | | | |
|-------------------------------|---|-----|-----|---------|------|-------|---|---|--|--|--|--|--|--|--|-----|-----|-----|-----|---------|------|-------|
| POWER SUPPLY | max 2W - max 500mA | | | | | | | | | | | | | | | | | | | | | |
| CODE | AV01052GN | | | | | | | | | | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue | | | | | | | | | | | | | | | | | | | | | |
| OPTICS | <table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> <td>T</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>30°x65°</td> <td>110°</td> <td>Diff.</td> </tr> </table> | N | M | W | X | E | T | D | | | | | | | | 10° | 25° | 40° | 60° | 30°x65° | 110° | Diff. |
| N | M | W | X | E | T | D | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | 30°x65° | 110° | Diff. | | | | | | | | | | | | | | | | |
| FINISHES | I - Inox AISI 316L | | | | | | | | | | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 150lm (3000°K, 500mA) | | | | | | | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 120lm (3000°K, 500mA, 40°) | | | | | | | | | | | | | | | | | | | | | |
| LED NUMBER | 1 power LED | | | | | | | | | | | | | | | | | | | | | |
| MATERIAL | body in anodized aluminium, flange in Inox AISI 316L | | | | | | | | | | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | | | | | | | | | | |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable | | | | | | | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | | | | | | | |
| MOUNTING | recessed (floor) | | | | | | | | | | | | | | | | | | | | | |
| ACCESSORIES | outer case code: AV01403GN | | | | | | | | | | | | | | | | | | | | | |
| NOTES | 24V version on request | | | | | | | | | | | | | | | | | | | | | |

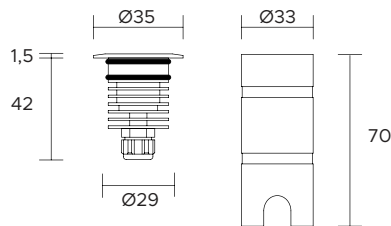

| | | | | | | | | | | | | | | | | | | | | | | |
|-------------------------------|---|-----|-----|---------|------|-------|---|---|--|--|--|--|--|--|--|-----|-----|-----|-----|---------|------|-------|
| POWER SUPPLY | max 1W - max 350mA | | | | | | | | | | | | | | | | | | | | | |
| CODE | AV01106GN | | | | | | | | | | | | | | | | | | | | | |
| LED COLOUR | <ul style="list-style-type: none"> C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue | | | | | | | | | | | | | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> <td>T</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>30°x65°</td> <td>110°</td> <td>Diff.</td> </tr> </table> | N | M | W | X | E | T | D | | | | | | | | 10° | 25° | 40° | 60° | 30°x65° | 110° | Diff. |
| N | M | W | X | E | T | D | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | 30°x65° | 110° | Diff. | | | | | | | | | | | | | | | | |
| FINISHES | I - Inox AISI 316L | | | | | | | | | | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 110lm (3000°K, 350mA) | | | | | | | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 100lm (3000°K, 350mA, 40°) | | | | | | | | | | | | | | | | | | | | | |
| LED NUMBER | 1 power LED | | | | | | | | | | | | | | | | | | | | | |
| MATERIAL | body and flange in Inox AISI 316L | | | | | | | | | | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | | | | | | | | | | |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable | | | | | | | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | | | | | | | |
| MOUNTING | recessed (floor) | | | | | | | | | | | | | | | | | | | | | |
| ACCESSORIES | outer case code: AV01403GN | | | | | | | | | | | | | | | | | | | | | |
| NOTES | 24V version on request | | | | | | | | | | | | | | | | | | | | | |

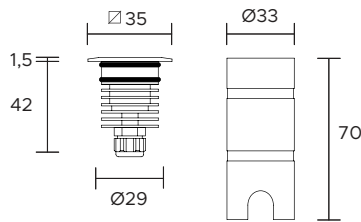


| | |
|-------------------------------|---|
| POWER SUPPLY | max 2W - max 500mA |
| CODE | AV01054GN |
| LED COLOUR | <ul style="list-style-type: none"> C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue |
| OPTICS | <ul style="list-style-type: none"> N 10° M 25° W 40° X 60° E 30°x65° T 110° D Diff. |
| FINISHES | <ul style="list-style-type: none"> G - Grey B - Black |
| LUMEN OUTPUT SOURCE | 150lm (3000°K, 500mA) |
| DELIVERED LUMEN OUTPUT | 120lm (3000°K, 500mA, 40°) |
| LED NUMBER | 1 power LED |
| MATERIAL | body and flange in anodized aluminium |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable |
| WIRING | in series |
| MOUNTING | recessed (floor) |
| ACCESSORIES | outer case code: AV01403GN |
| NOTES | 24V version on request |

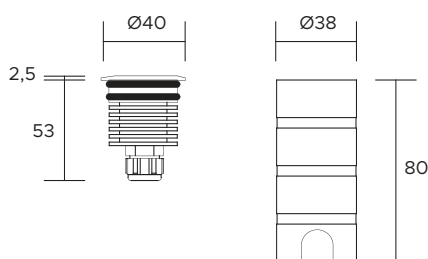


| | | | | | | | | | | | | | | | | | | | | | | |
|-------------------------------|---|-----|-----|---------|------|-------|---|---|--|--|--|--|--|--|--|-----|-----|-----|-----|---------|------|-------|
| POWER SUPPLY | max 3W - max 700mA | | | | | | | | | | | | | | | | | | | | | |
| CODE | AV01056GN | | | | | | | | | | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue | | | | | | | | | | | | | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td><td>M</td><td>W</td><td>X</td><td>E</td><td>T</td><td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>30°x65°</td> <td>110°</td> <td>Diff.</td> </tr> </table> | N | M | W | X | E | T | D | | | | | | | | 10° | 25° | 40° | 60° | 30°x65° | 110° | Diff. |
| N | M | W | X | E | T | D | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | 30°x65° | 110° | Diff. | | | | | | | | | | | | | | | | |
| FINISHES | G - Grey B - Black | | | | | | | | | | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 190lm (3000°K, 700mA) | | | | | | | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 160lm (3000°K, 700mA, 40°) | | | | | | | | | | | | | | | | | | | | | |
| LED NUMBER | 1 power LED | | | | | | | | | | | | | | | | | | | | | |
| MATERIAL | body and flange in anodized aluminium | | | | | | | | | | | | | | | | | | | | | |
| DRIVER | not include | | | | | | | | | | | | | | | | | | | | | |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable | | | | | | | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | | | | | | | |
| MOUNTING | recessed (floor) | | | | | | | | | | | | | | | | | | | | | |
| ACCESSORIES | outer case code: AV01405GN | | | | | | | | | | | | | | | | | | | | | |
| NOTES | 24V version on request | | | | | | | | | | | | | | | | | | | | | |




| | | | | | | | | | | | | | | | | | | | | | | |
|-------------------------------|---|-----|-----|---------|------|-------|---|---|--|--|--|--|--|--|--|-----|-----|-----|-----|---------|------|-------|
| POWER SUPPLY | max 3W - max 700mA | | | | | | | | | | | | | | | | | | | | | |
| CODE | AV01058GN | | | | | | | | | | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue | | | | | | | | | | | | | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td><td>M</td><td>W</td><td>X</td><td>E</td><td>T</td><td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>30°x65°</td> <td>110°</td> <td>Diff.</td> </tr> </table> | N | M | W | X | E | T | D | | | | | | | | 10° | 25° | 40° | 60° | 30°x65° | 110° | Diff. |
| N | M | W | X | E | T | D | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | 30°x65° | 110° | Diff. | | | | | | | | | | | | | | | | |
| FINISHES | I - Inox AISI 316L | | | | | | | | | | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 190lm (3000°K, 700mA) | | | | | | | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 160lm (3000°K, 700mA, 40°) | | | | | | | | | | | | | | | | | | | | | |
| LED NUMBER | 1 power LED | | | | | | | | | | | | | | | | | | | | | |
| MATERIAL | body in anodized aluminium, flange in Inox AISI 316L | | | | | | | | | | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | | | | | | | | | | |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable | | | | | | | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | | | | | | | |
| MOUNTING | recessed (floor) | | | | | | | | | | | | | | | | | | | | | |
| ACCESSORIES | outer case code: AV01405GN | | | | | | | | | | | | | | | | | | | | | |
| NOTES | 24V version on request | | | | | | | | | | | | | | | | | | | | | |

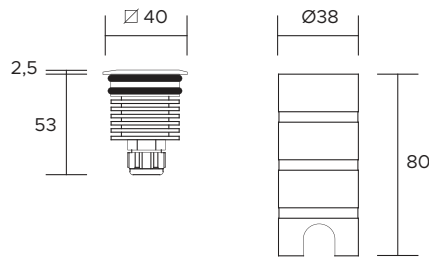

| | | | | | | | | | | | | | | | | | | | | | | |
|-------------------------------|---|-----|-----|---------|------|-------|---|---|--|--|--|--|--|--|--|-----|-----|-----|-----|---------|------|-------|
| POWER SUPPLY | max 3W - max 700mA | | | | | | | | | | | | | | | | | | | | | |
| CODE | AV01061GN | | | | | | | | | | | | | | | | | | | | | |
| LED COLOUR | <ul style="list-style-type: none"> C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue | | | | | | | | | | | | | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> <td>T</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>30°x65°</td> <td>110°</td> <td>Diff.</td> </tr> </table> | N | M | W | X | E | T | D | | | | | | | | 10° | 25° | 40° | 60° | 30°x65° | 110° | Diff. |
| N | M | W | X | E | T | D | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | 30°x65° | 110° | Diff. | | | | | | | | | | | | | | | | |
| FINISHES | <ul style="list-style-type: none"> G - Grey B - Black | | | | | | | | | | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 190lm (3000°K, 700mA) | | | | | | | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 160lm (3000°K, 700mA, 40°) | | | | | | | | | | | | | | | | | | | | | |
| LED NUMBER | 1 power LED | | | | | | | | | | | | | | | | | | | | | |
| MATERIAL | body and flange in anodized aluminium | | | | | | | | | | | | | | | | | | | | | |
| DRIVER | not included, see pag. 324 and 326 | | | | | | | | | | | | | | | | | | | | | |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable | | | | | | | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | | | | | | | |
| MOUNTING | recessed (floor) | | | | | | | | | | | | | | | | | | | | | |
| ACCESSORIES | outer case code: AV01405GN | | | | | | | | | | | | | | | | | | | | | |
| NOTES | 24V version on request | | | | | | | | | | | | | | | | | | | | | |


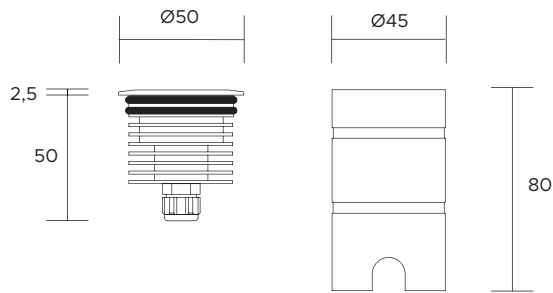


| | | | | | | | | | | | | | | | | |
|-------------------------------|---|-----|------|-------|---|---|--|--|--|--|--|-----|-----|-----|------|-------|
| POWER SUPPLY | max 3W - max 350mA | | | | | | | | | | | | | | | |
| CODE | AV01064GN | | | | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue | | | | | | | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>T</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>30°</td> <td>110°</td> <td>Diff.</td> </tr> </table> | N | M | W | T | D | | | | | | 15° | 25° | 30° | 110° | Diff. |
| N | M | W | T | D | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| 15° | 25° | 30° | 110° | Diff. | | | | | | | | | | | | |
| FINISHES | I - Inox AISI 316L | | | | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 330lm (3000°K, 350mA) | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 250lm (3000°K, 350mA, 30°) | | | | | | | | | | | | | | | |
| LED NUMBER | 3 power LEDs | | | | | | | | | | | | | | | |
| MATERIAL | body in anodized aluminium, flange in Inox AISI 316L | | | | | | | | | | | | | | | |
| DRIVER | not included, see pag. 322 and 326 | | | | | | | | | | | | | | | |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | |
| MOUNTING | recessed (floor) | | | | | | | | | | | | | | | |
| ACCESSORIES | outer case code: AV01406GN | | | | | | | | | | | | | | | |
| NOTES | 24V version on request | | | | | | | | | | | | | | | |

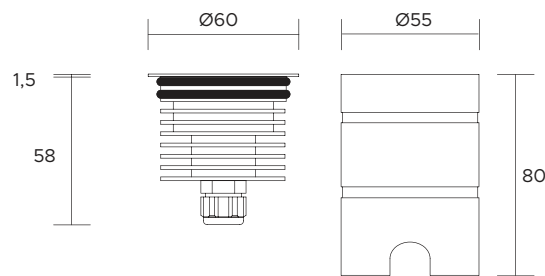


| | | | | | | | | | | | | | | | | |
|-------------------------------|---|-----|------|-------|---|---|--|--|--|--|--|-----|-----|-----|------|-------|
| POWER SUPPLY | max 3W - max 350mA | | | | | | | | | | | | | | | |
| CODE | AV01068GN | | | | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue | | | | | | | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>T</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> <td>110°</td> <td>Diff.</td> </tr> </table> | N | M | W | T | D | | | | | | 15° | 25° | 40° | 110° | Diff. |
| N | M | W | T | D | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| 15° | 25° | 40° | 110° | Diff. | | | | | | | | | | | | |
| FINISHES | I - Inox AISI 316L | | | | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 330lm (3000°K, 350mA) | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 260lm (3000°K, 350mA, 40°) | | | | | | | | | | | | | | | |
| LED NUMBER | 3 power LEDs | | | | | | | | | | | | | | | |
| MATERIAL | body in anodized aluminium, flange in Inox AISI 316L | | | | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | | | | |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | |
| MOUNTING | recessed (floor) | | | | | | | | | | | | | | | |
| ACCESSORIES | outer case code: AV01407GN | | | | | | | | | | | | | | | |
| NOTES | 24V version on request, hex louver on request | | | | | | | | | | | | | | | |


| | | | | | | | | | | | | | | | | |
|-------------------------------|---|-----|------|-------|---|---|--|--|--|--|--|-----|-----|-----|------|-------|
| POWER SUPPLY | max 9W - max 700mA | | | | | | | | | | | | | | | |
| CODE | AV01068GN | | | | | | | | | | | | | | | |
| LED COLOUR | 1 - RGB 2 - AWB 3 - A WW W | | | | | | | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>T</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> <td>110°</td> <td>Diff.</td> </tr> </table> | N | M | W | T | D | | | | | | 15° | 25° | 40° | 110° | Diff. |
| N | M | W | T | D | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| 15° | 25° | 40° | 110° | Diff. | | | | | | | | | | | | |
| FINISHES | I - Inox AISI 316L | | | | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 390lm (RGB, 700mA) | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 360lm (RGB, 700mA, 40°) | | | | | | | | | | | | | | | |
| LED NUMBER | 3 power LEDs | | | | | | | | | | | | | | | |
| MATERIAL | body in anodized aluminium, flange in Inox AISI 316L | | | | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | | | | |
| POWER CABLE | includes 1,5 mt Liyy-AD8 6 x 0,35 cable | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | |
| MOUNTING | recessed (floor) | | | | | | | | | | | | | | | |
| ACCESSORIES | outer case code: AV01407GN | | | | | | | | | | | | | | | |
| NOTES | 24V version on request, hex louver on request | | | | | | | | | | | | | | | |

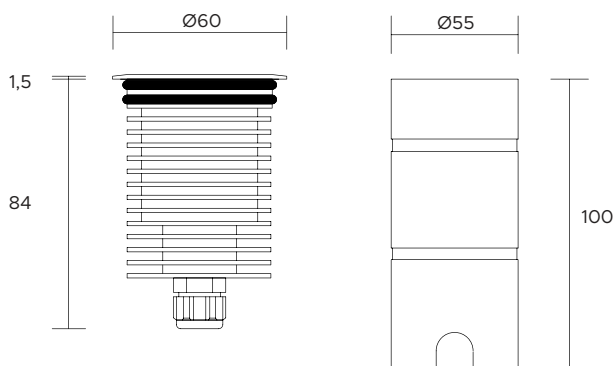


| | | | | | | | | | | |
|-------------------------------|---|-----|---|---|--|--|--|-----|-----|-----|
| POWER SUPPLY | max 6W - max 500mA | | | | | | | | | |
| CODE | AV01070GN | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue | | | | | | | | | |
| OPTICS | <table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> </tr> </table> | N | M | W | | | | 15° | 25° | 40° |
| N | M | W | | | | | | | | |
| | | | | | | | | | | |
| 15° | 25° | 40° | | | | | | | | |
| FINISHES | I - Inox AISI 316L | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 450lm (3000°K, 500mA) | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 350lm (3000°K, 500mA, 40°) | | | | | | | | | |
| LED NUMBER | 3 power LEDs | | | | | | | | | |
| MATERIAL | body in anodized aluminium, flange in Inox AISI 316L | | | | | | | | | |
| DRIVER | not included | | | | | | | | | |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable | | | | | | | | | |
| WIRING | in series | | | | | | | | | |
| MOUNTING | recessed (floor) | | | | | | | | | |
| ACCESSORIES | outer case code: AV01408GN | | | | | | | | | |
| NOTES | 24V version on request, hex louver on request | | | | | | | | | |




| | | | | | | | | | | |
|-------------------------------|--|-----|---|---|--|--|--|-----|-----|-----|
| POWER SUPPLY | max 9W - max 700mA | | | | | | | | | |
| CODE | AV01070GN | | | | | | | | | |
| LED COLOUR | 1 - RGB 2 - AWB 3 - A WW W | | | | | | | | | |
| OPTICS | <table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> </tr> </table> | N | M | W | | | | 15° | 25° | 40° |
| N | M | W | | | | | | | | |
| | | | | | | | | | | |
| 15° | 25° | 40° | | | | | | | | |
| FINISHES | I - Inox AISI 316L | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 390lm (RGB, 700mA) | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 360lm (RGB, 700mA, 40°) | | | | | | | | | |
| LED NUMBER | 3 power LEDs | | | | | | | | | |
| MATERIAL | body in anodized aluminium, flange in Inox AISI 316L | | | | | | | | | |
| DRIVER | not included | | | | | | | | | |
| POWER CABLE | includes 1,5 mt Liyy-AD8 6 x 0,35 cable | | | | | | | | | |
| WIRING | in series | | | | | | | | | |
| MOUNTING | recessed (floor) | | | | | | | | | |
| ACCESSORIES | outer case code: AV01408GN | | | | | | | | | |
| NOTES | 24V version on request, hex louver on request | | | | | | | | | |

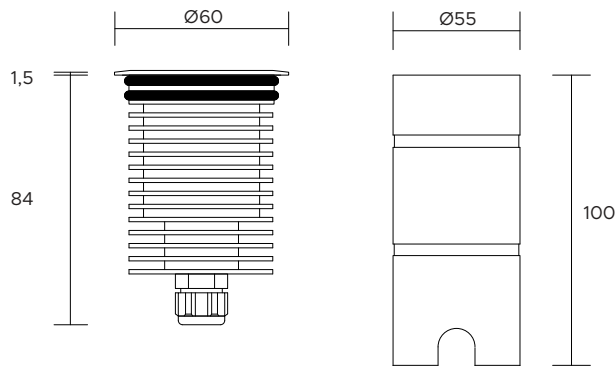


| | |
|-------------------------------|---|
| POWER SUPPLY | max 4W - max 900mA |
| CODE | AV01077GN |
| LED COLOUR | <ul style="list-style-type: none"> C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue |
| OPTICS | <div style="text-align: center;">  <p>S 3°</p> </div> |
| FINISHES | I - Inox AISI 316L |
| LUMEN OUTPUT SOURCE | 220lm (3000°K, 900mA) |
| DELIVERED LUMEN OUTPUT | 160lm (3000°K, 900mA, 3°) |
| LED NUMBER | 1 power LED |
| MATERIAL | body in anodized aluminium, flange in Inox AISI 316L |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable |
| WIRING | in series |
| MOUNTING | recessed (floor) |
| ACCESSORIES | outer case code: AV01410GN |
| NOTES | 24V version on request, hex louver on request |

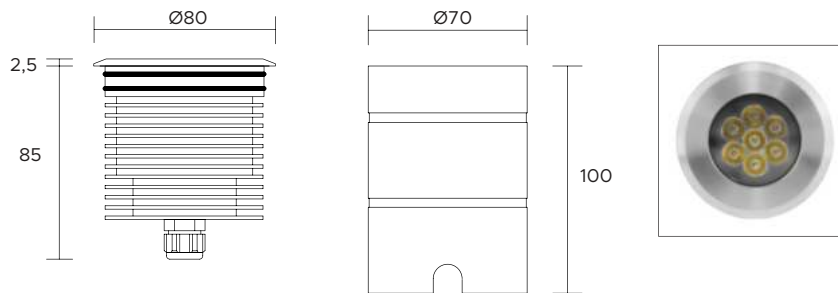


| | | | | | | | | | | |
|-------------------------------|---|-----|---|---|--|--|--|-----|-----|-----|
| POWER SUPPLY | max 7W - max 350mA | | | | | | | | | |
| CODE | AV01079GN | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>35°</td> </tr> </table> | N | M | W | | | | 15° | 25° | 35° |
| N | M | W | | | | | | | | |
| | | | | | | | | | | |
| 15° | 25° | 35° | | | | | | | | |
| FINISHES | I - Inox AISI 316L | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 770lm (3000°K, 350mA) | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 700lm (3000°K, 350mA, 35°) | | | | | | | | | |
| LED NUMBER | 7 power LEDs | | | | | | | | | |
| MATERIAL | body in anodized aluminium, flange in Inox AISI 316L | | | | | | | | | |
| DRIVER | not included | | | | | | | | | |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable | | | | | | | | | |
| WIRING | in series | | | | | | | | | |
| MOUNTING | recessed (floor) | | | | | | | | | |
| ACCESSORIES | outer case code: AV01411GN | | | | | | | | | |
| NOTES | hex louver on request | | | | | | | | | |

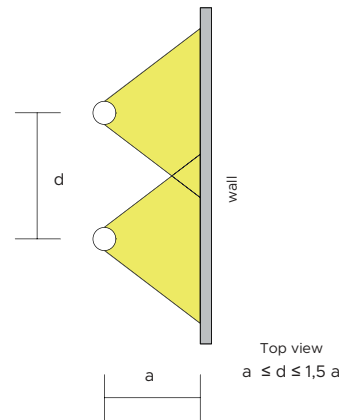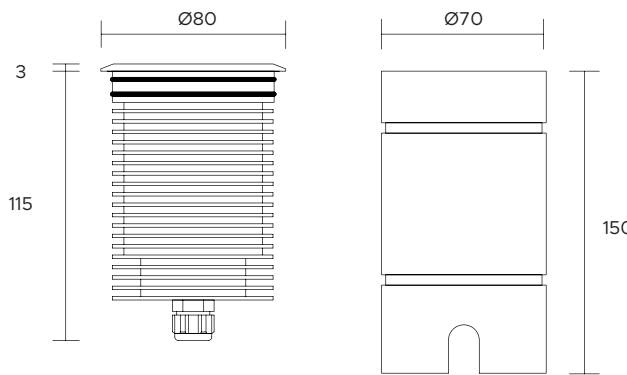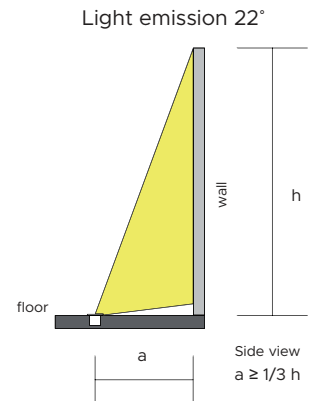


| | |
|-------------------------------|--|
| POWER SUPPLY | max 12W - max 350mA |
| CODE | AV01528GN |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CR190 Y - Warm white 2700°K |
| OPTICS | A2 wall washer |
| FINISHES | I - Inox AISI 316L |
| LUMEN OUTPUT SOURCE | 1730lm (3000°K, 350mA) |
| DELIVERED LUMEN OUTPUT | 1560lm (3000°K, 350mA, Asymmetric) |
| LED NUMBER | 1 power LED multichip |
| MATERIAL | body in anodized aluminium, flange in Inox AISI 316L |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0.50 cable |
| WIRING | in series |
| MOUNTING | recessed (floor) |
| ACCESSORIES | outer case code: AV01413GN |
| NOTES | |

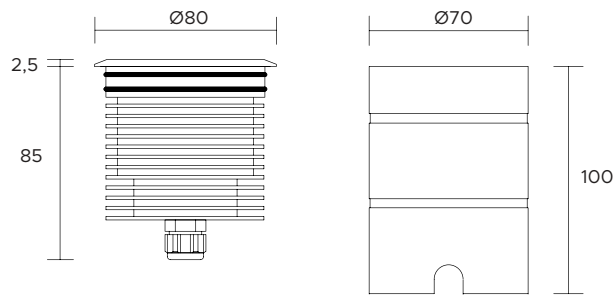


| | | | | | | | | | | | | | |
|-------------------------------|--|-----|-------|---|---|--|--|--|--|-----|-----|-----|-------|
| POWER SUPPLY | max 6W - max 350mA | | | | | | | | | | | | |
| CODE | AV01080GN | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K | | | | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> <td>Diff.</td> </tr> </table> | N | M | W | D | | | | | 15° | 25° | 40° | Diff. |
| N | M | W | D | | | | | | | | | | |
| | | | | | | | | | | | | | |
| 15° | 25° | 40° | Diff. | | | | | | | | | | |
| FINISHES | I - Inox AISI 316L | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 890lm (3000°K, 350mA) | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 650lm (3000°K, 350mA, 40°) | | | | | | | | | | | | |
| LED NUMBER | 1 power LED multichip | | | | | | | | | | | | |
| MATERIAL | body in anodized aluminium, flange in Inox AISI 316L | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | |
| MOUNTING | recessed (floor) | | | | | | | | | | | | |
| ACCESSORIES | outer case code: AV01412GN | | | | | | | | | | | | |
| NOTES | hex louver on request | | | | | | | | | | | | |

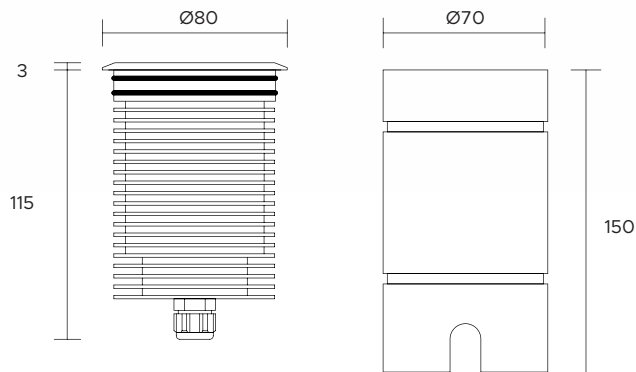



| | | | | | | | | | | | | | |
|-------------------------------|--|-----|-------|---|---|--|--|--|--|-----|-----|-----|-------|
| POWER SUPPLY | max 12W - max 350mA | | | | | | | | | | | | |
| CODE | AV01082GN | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K | | | | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> <td>Diff.</td> </tr> </table> | N | M | W | D | | | | | 15° | 25° | 40° | Diff. |
| N | M | W | D | | | | | | | | | | |
| | | | | | | | | | | | | | |
| 15° | 25° | 40° | Diff. | | | | | | | | | | |
| FINISHES | I - Inox AISI 316L | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 1730lm (3000°K, 350mA) | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 1290lm (3000°K, 350mA, 40°) | | | | | | | | | | | | |
| LED NUMBER | 1 power LED multichip | | | | | | | | | | | | |
| MATERIAL | body in anodized aluminium, flange in Inox AISI 316L | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0.50 cable | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | |
| MOUNTING | recessed (floor) | | | | | | | | | | | | |
| ACCESSORIES | outer case code: AV01413GN | | | | | | | | | | | | |
| NOTES | hex louver on request | | | | | | | | | | | | |

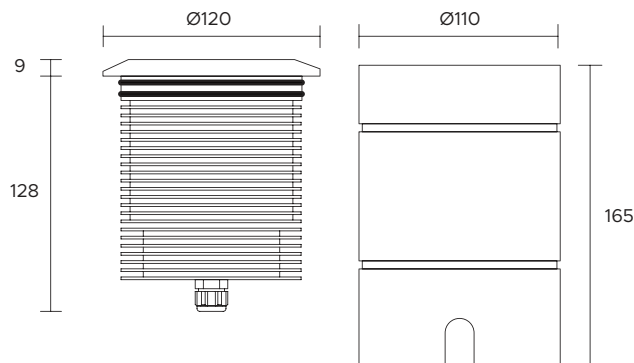

| | | | | | | | | | | | | | |
|-------------------------------|--|-----|-------|---|---|--|--|--|--|-----|-----|-----|-------|
| POWER SUPPLY | max 20W - max 500mA | | | | | | | | | | | | |
| CODE | AV01083GN | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K | | | | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> <td>Diff.</td> </tr> </table> | N | M | W | D | | | | | 15° | 25° | 40° | Diff. |
| N | M | W | D | | | | | | | | | | |
| | | | | | | | | | | | | | |
| 15° | 25° | 40° | Diff. | | | | | | | | | | |
| FINISHES | I - Inox AISI 316L | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 2480lm (3000°K, 500mA) | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 1940lm (3000°K, 500mA, 40°) | | | | | | | | | | | | |
| LED NUMBER | 1 power LED multichip | | | | | | | | | | | | |
| MATERIAL | body in anodized aluminium, flange in Inox AISI 316L | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0.50 cable | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | |
| MOUNTING | recessed (floor) | | | | | | | | | | | | |
| ACCESSORIES | outer case code: AV01414GN | | | | | | | | | | | | |
| NOTES | | | | | | | | | | | | | |

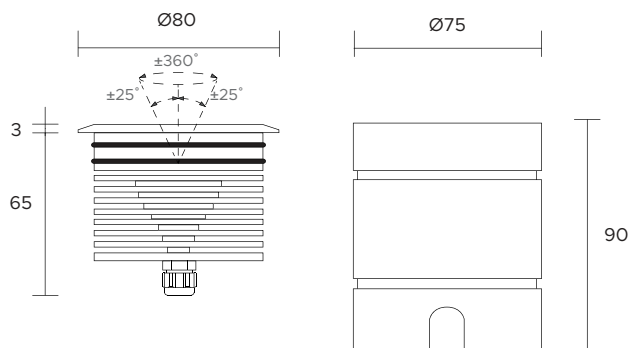


| | |
|-------------------------------|--|
| POWER SUPPLY | max 6W - max 500mA |
| CODE | AV01084GN |
| LED COLOUR | <p>C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue</p> |
| OPTICS | <p>N M P D 15° 25° 30° Diff.</p> |
| FINISHES | I - Inox AISI 316L |
| LUMEN OUTPUT SOURCE | 450lm (3000°K, 500mA) |
| DELIVERED LUMEN OUTPUT | 310lm (3000°K, 500mA, 30°) |
| LED NUMBER | 3 power LEDs |
| MATERIAL | body in anodized aluminium, flange in Inox AISI 316L |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0.50 cable |
| WIRING | in series |
| MOUNTING | recessed (floor) |
| ACCESSORIES | outer case code: AV01415GN |
| NOTES | 24V version on request |

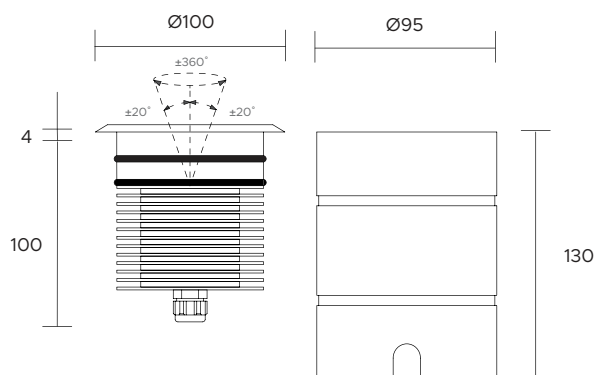


| | |
|-------------------------------|---|
| POWER SUPPLY | max 6W - max 500mA |
| CODE | AV01085GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue |
| OPTICS | N 15° M 25° W 40° D Diff. |
| FINISHES | I - Inox AISI 316L |
| LUMEN OUTPUT SOURCE | 450lm (3000°K, 500mA) |
| DELIVERED LUMEN OUTPUT | 350lm (3000°K, 500mA, 40°) |
| LED NUMBER | 3 power LEDs |
| MATERIAL | body in anodized aluminium, flange in Inox AISI 316L |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0.50 cable |
| WIRING | in series |
| MOUNTING | recessed (floor) |
| ACCESSORIES | outer case code: AV01416GN |
| NOTES | 24V version on request |


| | |
|-------------------------------|---|
| POWER SUPPLY | max 9W - max 700mA |
| CODE | AV01085GN |
| LED COLOUR | 1 - RGB 2 - AWB 3 - A WW W |
| OPTICS | N 15° M 25° W 40° D Diff. |
| FINISHES | I - Inox AISI 316L |
| LUMEN OUTPUT SOURCE | 390lm (RGB, 700mA) |
| DELIVERED LUMEN OUTPUT | 360lm (RGB, 700mA, 40°) |
| LED NUMBER | 3 power LEDs |
| MATERIAL | body in anodized aluminium, flange in Inox AISI 316L |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Liyy-AD8 6 x 0,35 cable |
| WIRING | in series |
| MOUNTING | recessed (floor) |
| ACCESSORIES | outer case code: AV01416GN |
| NOTES | 24V version on request |

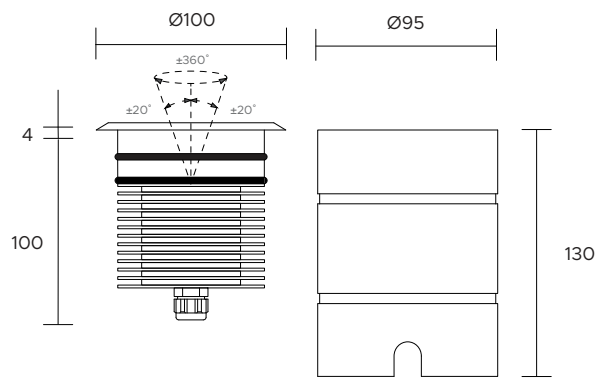



| | |
|-------------------------------|---|
| POWER SUPPLY | max 4W - max 900mA |
| CODE | AV01087GN |
| LED COLOUR | <ul style="list-style-type: none"> C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue |
| OPTICS | <div style="text-align: center;"> <p>S 3°</p> </div> |
| FINISHES | I - Inox AISI 316L |
| LUMEN OUTPUT SOURCE | 220lm (3000°K, 900mA) |
| DELIVERED LUMEN OUTPUT | 160lm (3000°K, 900mA, 3°) |
| LED NUMBER | 1 power LED |
| MATERIAL | body in anodized aluminium, flange in Inox AISI 316L |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0.50 cable |
| WIRING | in series |
| MOUNTING | recessed (floor) |
| ACCESSORIES | outer case code: AV01416GN |
| NOTES | 24V version on request |

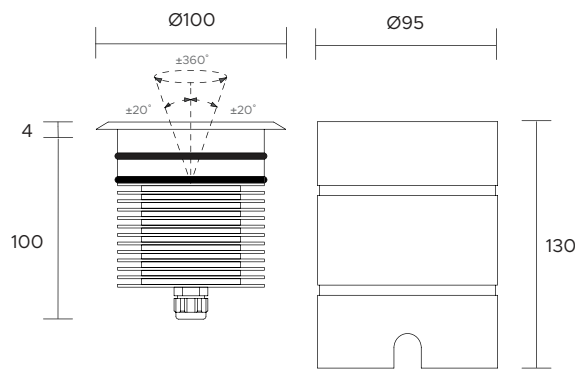

| | | | | | | | | | | |
|-------------------------------|---|-----|---|---|--|--|--|-----|-----|-----|
| POWER SUPPLY | max 7W - max 350mA | | | | | | | | | |
| CODE | AV01088GN | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue | | | | | | | | | |
| OPTICS | <table border="1"> <tr> <td>N</td> <td>M</td> <td>P</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>35°</td> </tr> </table> | N | M | P | | | | 10° | 25° | 35° |
| N | M | P | | | | | | | | |
| | | | | | | | | | | |
| 10° | 25° | 35° | | | | | | | | |
| FINISHES | I - Inox AISI 316L | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 770lm (3000°K, 350mA) | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 700lm (3000°K, 350mA, 35°) | | | | | | | | | |
| LED NUMBER | 7 power LEDs | | | | | | | | | |
| MATERIAL | body in anodized aluminium, flange in Inox AISI 316L | | | | | | | | | |
| DRIVER | not included | | | | | | | | | |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0.50 cable | | | | | | | | | |
| WIRING | in series | | | | | | | | | |
| MOUNTING | recessed (floor) | | | | | | | | | |
| ACCESSORIES | outer case code: AV01416GN | | | | | | | | | |
| NOTES | | | | | | | | | | |

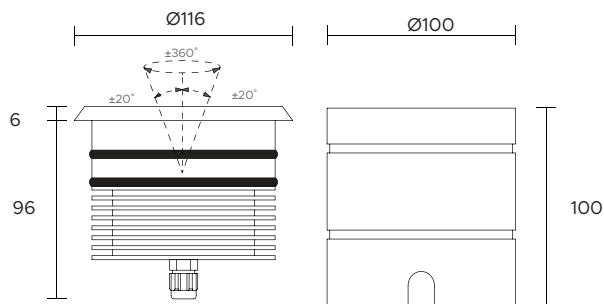

| | |
|-------------------------------|---|
| POWER SUPPLY | max 8W - max 500mA |
| CODE | AV01091GN |
| LED COLOUR | <ul style="list-style-type: none"> C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue |
| OPTICS | <ul style="list-style-type: none"> N 15° M 25° W 40° T 110° D Diff. |
| FINISHES | I - Inox AISI 316L |
| LUMEN OUTPUT SOURCE | 600lm (3000°K, 500mA) |
| DELIVERED LUMEN OUTPUT | 550lm (3000°K, 500mA, 40 °) |
| LED NUMBER | 4 power LEDs |
| MATERIAL | body in anodized aluminium, flange in Inox AISI 316L |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0.50 cable |
| WIRING | in series |
| MOUNTING | recessed (floor) |
| ACCESSORIES | outer case code: AV01417GN |
| NOTES | 24V version on request static version on request |

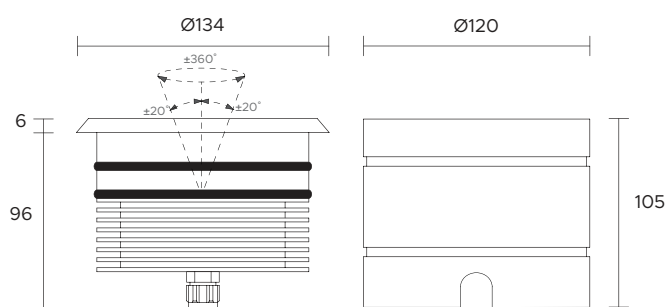

POWER SUPPLY max 12W - max 500mA

CODE AV01095GN

LED COLOUR
 C - Cool white 5500°K
 N - Natural white 4000°K
 W - Warm white 3000°K
 H - Warm white 3000°K - CRI90
 Y - Warm white 2700°K
 A - Amber
 R - Red
 G - Green
 B - Blue

OPTICS

| | | | | | |
|-----|-----|-----|-----|------|-------|
| | | | | | |
| N | M | W | X | T | D |
| 10° | 25° | 40° | 60° | 110° | Diff. |

FINISHES I - Inox AISI 316L

LUMEN OUTPUT SOURCE 900lm (3000°K, 500mA)

DELIVERED LUMEN OUTPUT 860lm (3000°K, 500mA, 40°)

LED NUMBER 6 power LEDs

MATERIAL body in anodized aluminium, flange in Inox AISI 316L

DRIVER not included

POWER CABLE includes 1,5 mt Sub4 FROST-UV 2 x 0.50 cable

WIRING in series

MOUNTING recessed (floor)

ACCESSORIES outer case code: AV01418GN

NOTES 24V version on request
static version on request

max 18W - max 700mA

AV01095GN

1 - RGB
 2 - AWB
 3 - A WW W

OPTICS

| | | | | | |
|-----|-----|-----|-----|------|-------|
| | | | | | |
| N | M | W | X | T | D |
| 10° | 25° | 40° | 60° | 110° | Diff. |

I - Inox AISI 316L

780lm (RGB, 700mA)

745lm (RGB, 700mA, 40°)

6 power LEDs

body in anodized aluminium, flange in Inox AISI 316L

not included



includes 1,5 mt Liyy-AD8 6 x 0,35 cable

in series

recessed (floor)

outer case code: AV01418GN

24V version on request
static version on request

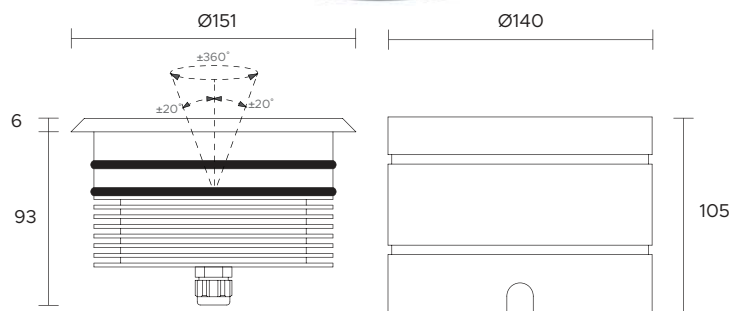

| | |
|---------------------|---------------------|
| POWER SUPPLY | max 18W - max 500mA |
| CODE | AV01099GN |

| | |
|-------------------|---|
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue |
|-------------------|---|

| | | | | | | | | | | | | | |
|---------------|--|-----|-----|------|-------|---|---|-----|-----|-----|-----|------|-------|
| OPTICS | <table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>T</td> <td>D</td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> <td>Diff.</td> </tr> </table> | N | M | W | X | T | D | 10° | 25° | 40° | 60° | 110° | Diff. |
| N | M | W | X | T | D | | | | | | | | |
| 10° | 25° | 40° | 60° | 110° | Diff. | | | | | | | | |

| | |
|-----------------|--------------------|
| FINISHES | I - Inox AISI 316L |
|-----------------|--------------------|

| | |
|----------------------------|------------------------|
| LUMEN OUTPUT SOURCE | 1350lm (3000°K, 500mA) |
|----------------------------|------------------------|

| | |
|-------------------------------|-----------------------------|
| DELIVERED LUMEN OUTPUT | 1300lm (3000°K, 500mA, 40°) |
|-------------------------------|-----------------------------|

| | |
|-------------------|--------------|
| LED NUMBER | 9 power LEDs |
|-------------------|--------------|

| | |
|-----------------|---|
| MATERIAL | body in anodized aluminium, flange in Inox AISI 316L |
|-----------------|---|

| | |
|---------------|--------------|
| DRIVER | not included |
|---------------|--------------|

| | |
|--------------------|--|
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0.50 cable |
|--------------------|--|

| | |
|---------------|-----------|
| WIRING | in series |
|---------------|-----------|

| | |
|-----------------|------------------|
| MOUNTING | recessed (floor) |
|-----------------|------------------|

| | |
|--------------------|----------------------------|
| ACCESSORIES | outer case code: AV01419GN |
|--------------------|----------------------------|

| | |
|--------------|---|
| NOTES | 24V version on request static version on request |
|--------------|---|

| | |
|---------------------|---------------------|
| POWER SUPPLY | max 27W - max 700mA |
| CODE | AV01099GN |

| | |
|-------------------|----------------------------------|
| LED COLOUR | 1 - RGB 2 - AWB 3 - A WW W |
|-------------------|----------------------------------|

| | | | | | | | | | | | | | |
|---------------|--|-----|-----|------|-------|---|---|-----|-----|-----|-----|------|-------|
| OPTICS | <table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>T</td> <td>D</td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> <td>Diff.</td> </tr> </table> | N | M | W | X | T | D | 10° | 25° | 40° | 60° | 110° | Diff. |
| N | M | W | X | T | D | | | | | | | | |
| 10° | 25° | 40° | 60° | 110° | Diff. | | | | | | | | |

| | |
|-----------------|--------------------|
| FINISHES | I - Inox AISI 316L |
|-----------------|--------------------|

| | |
|----------------------------|---------------------|
| LUMEN OUTPUT SOURCE | 1170lm (RGB, 700mA) |
|----------------------------|---------------------|

| | |
|-------------------------------|--------------------------|
| DELIVERED LUMEN OUTPUT | 1130lm (RGB, 700mA, 40°) |
|-------------------------------|--------------------------|

| | |
|-------------------|--------------|
| LED NUMBER | 9 power LEDs |
|-------------------|--------------|

| | |
|-----------------|---|
| MATERIAL | body in anodized aluminium, flange in Inox AISI 316L |
|-----------------|---|

| | |
|---------------|--------------|
| DRIVER | not included |
|---------------|--------------|




| | |
|--------------------|---|
| POWER CABLE | includes 1,5 mt Liyy-AD8 6 x 0,35 cable |
|--------------------|---|

| | |
|---------------|-----------|
| WIRING | in series |
|---------------|-----------|

| | |
|-----------------|------------------|
| MOUNTING | recessed (floor) |
|-----------------|------------------|

| | |
|--------------------|----------------------------|
| ACCESSORIES | outer case code: AV01419GN |
|--------------------|----------------------------|

| | |
|--------------|---|
| NOTES | 24V version on request static version on request |
|--------------|---|

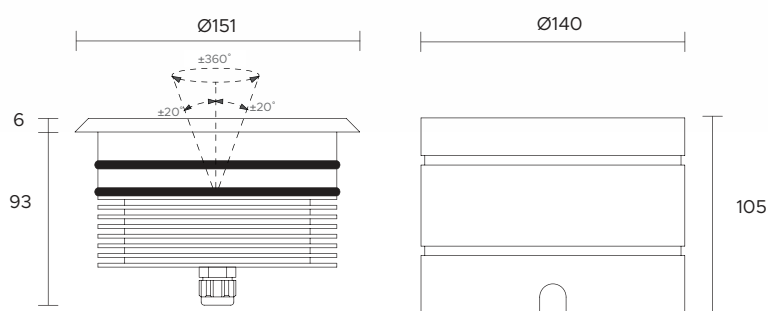

| | |
|---------------------|---------------------|
| POWER SUPPLY | max 24W - max 500mA |
| CODE | AV01103GN |

| | |
|-------------------|---|
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue |
|-------------------|---|

| | | | | | | | | | | | | | | | | | | | |
|---------------|--|-----|-----|------|-------|---|---|--|--|--|--|--|--|-----|-----|-----|-----|------|-------|
| OPTICS | <table border="0"> <tr> <td>N</td><td>M</td><td>W</td><td>X</td><td>T</td><td>D</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>10°</td><td>25°</td><td>40°</td><td>60°</td><td>110°</td><td>Diff.</td> </tr> </table> | N | M | W | X | T | D | | | | | | | 10° | 25° | 40° | 60° | 110° | Diff. |
| N | M | W | X | T | D | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | 110° | Diff. | | | | | | | | | | | | | | |

| | |
|-----------------|--------------------|
| FINISHES | I - Inox AISI 316L |
|-----------------|--------------------|

| | |
|----------------------------|------------------------|
| LUMEN OUTPUT SOURCE | 1800lm (3000°K, 500mA) |
|----------------------------|------------------------|

| | |
|-------------------------------|-----------------------------|
| DELIVERED LUMEN OUTPUT | 1690lm (3000°K, 500mA, 40°) |
|-------------------------------|-----------------------------|

| | |
|-------------------|---------------|
| LED NUMBER | 12 power LEDs |
|-------------------|---------------|

| | |
|-----------------|---|
| MATERIAL | body in anodized aluminium, flange in Inox AISI 316L |
|-----------------|---|

| | |
|---------------|--------------|
| DRIVER | not included |
|---------------|--------------|

| | |
|--------------------|--|
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0.50 cable |
|--------------------|--|

| | |
|---------------|-----------|
| WIRING | in series |
|---------------|-----------|

| | |
|-----------------|------------------|
| MOUNTING | recessed (floor) |
|-----------------|------------------|

| | |
|--------------------|----------------------------|
| ACCESSORIES | outer case code: AV01419GN |
|--------------------|----------------------------|

| | |
|--------------|---|
| NOTES | 24V version on request static version on request |
|--------------|---|

| | |
|---------------------|---------------------|
| POWER SUPPLY | max 36W - max 700mA |
| CODE | AV01103GN |

| | |
|-------------------|----------------------------------|
| LED COLOUR | 1 - RGB 2 - AWB 3 - A WW W |
|-------------------|----------------------------------|

| | | | | | | | | | | | | | | | | | | | |
|---------------|--|-----|-----|------|-------|---|---|--|--|--|--|--|--|-----|-----|-----|-----|------|-------|
| OPTICS | <table border="0"> <tr> <td>N</td><td>M</td><td>W</td><td>X</td><td>T</td><td>D</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>10°</td><td>25°</td><td>40°</td><td>60°</td><td>110°</td><td>Diff.</td> </tr> </table> | N | M | W | X | T | D | | | | | | | 10° | 25° | 40° | 60° | 110° | Diff. |
| N | M | W | X | T | D | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | 110° | Diff. | | | | | | | | | | | | | | |

| | |
|-----------------|--------------------|
| FINISHES | I - Inox AISI 316L |
|-----------------|--------------------|

| | |
|----------------------------|---------------------|
| LUMEN OUTPUT SOURCE | 1560lm (RGB, 700mA) |
|----------------------------|---------------------|

| | |
|-------------------------------|--------------------------|
| DELIVERED LUMEN OUTPUT | 1460lm (RGB, 700mA, 40°) |
|-------------------------------|--------------------------|

| | |
|-------------------|---------------|
| LED NUMBER | 12 power LEDs |
|-------------------|---------------|

| | |
|-----------------|---|
| MATERIAL | body in anodized aluminium, flange in Inox AISI 316L |
|-----------------|---|

| | |
|---------------|--------------|
| DRIVER | not included |
|---------------|--------------|

| | |
|--------------------|---|
| POWER CABLE | includes 1,5 mt Liyy-AD8 6 x 0,35 cable |
|--------------------|---|

| | |
|---------------|-----------|
| WIRING | in series |
|---------------|-----------|

| | |
|-----------------|------------------|
| MOUNTING | recessed (floor) |
|-----------------|------------------|

| | |
|--------------------|----------------------------|
| ACCESSORIES | outer case code: AV01419GN |
|--------------------|----------------------------|



| | |
|--------------|---|
| NOTES | 24V version on request static version on request |
|--------------|---|






Outdoor - Floor recessed

Grazing Lights






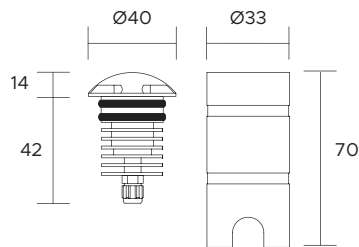


| | |
|-------------------------------|---|
| POWER SUPPLY | max 2W - max 500mA |
| CODE | AV01212GN AV01217GN AV01222GN AV01227GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue |
| FINISHES | G - Grey B - Black |
| LUMEN OUTPUT SOURCE | 150lm (3000°K, 500mA) |
| DELIVERED LUMEN OUTPUT | 90lm (3000°K, 500mA) |
| LED NUMBER | 1 power LED |
| MATERIAL | body and head in anodized aluminium |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable |
| WIRING | in series |
| MOUNTING | recessed (ceiling, wall, floor) |
| ACCESSORIES | outer case code: AV01214GN |
| NOTES | 24V version on request |

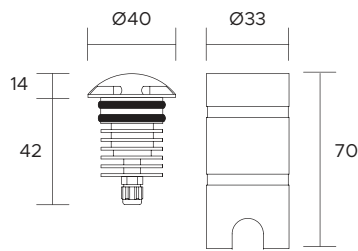



| | |
|-------------------------------|---|
| POWER SUPPLY | max 2W - max 500mA |
| CODE | AV01520GN AV01521GN AV01522GN AV01523GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue |
| FINISHES | I - Inox |
| LUMEN OUTPUT SOURCE | 150lm (3000°K, 500mA) |
| DELIVERED LUMEN OUTPUT | 90lm (3000°K, 500mA) |
| LED NUMBER | 1 power LED |
| MATERIAL | body in anodized aluminium, head in Inox AISI 316L |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable |
| WIRING | in series |
| MOUNTING | recessed (ceiling, wall, floor) |
| ACCESSORIES | outer case code: AV01214GN |
| NOTES | 24V version on request |

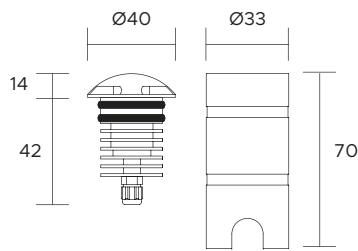

| | |
|-------------------------------|---|
| POWER SUPPLY | max 1W - max 350mA |
| CODE | AV01524GN AV01525GN AV01526GN AV01527GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue |
| FINISHES | I - Inox |
| LUMEN OUTPUT SOURCE | 110lm (3000°K, 350mA) |
| DELIVERED LUMEN OUTPUT | 100lm (3000°K, 350mA) |
| LED NUMBER | 1 power LED |
| MATERIAL | body and head in Inox AISI 316L |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable |
| WIRING | in series |
| MOUNTING | recessed (ceiling, wall, floor) |
| ACCESSORIES | outer case code: AV01214GN |
| NOTES | 24V version on request |

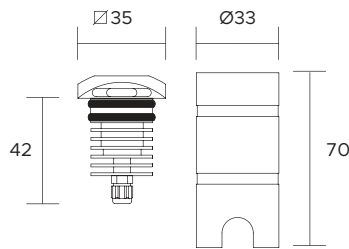

| | |
|-------------------------------|---|
| POWER SUPPLY | max 2W - max 500mA |
| CODE | AV01232GN AV01237GN AV01242GN AV01247GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue |
| FINISHES | G - Grey B - Black |
| LUMEN OUTPUT SOURCE | 150lm (3000°K, 500mA) |
| DELIVERED LUMEN OUTPUT | 90lm (3000°K, 500mA) |
| LED NUMBER | 1 power LED |
| MATERIAL | body and head in anodized aluminium |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable |
| WIRING | in series |
| MOUNTING | recessed (ceiling, wall, floor) |
| ACCESSORIES | outer case code: AV01214GN |
| NOTES | 24V version on request |

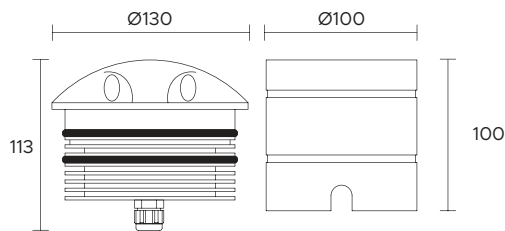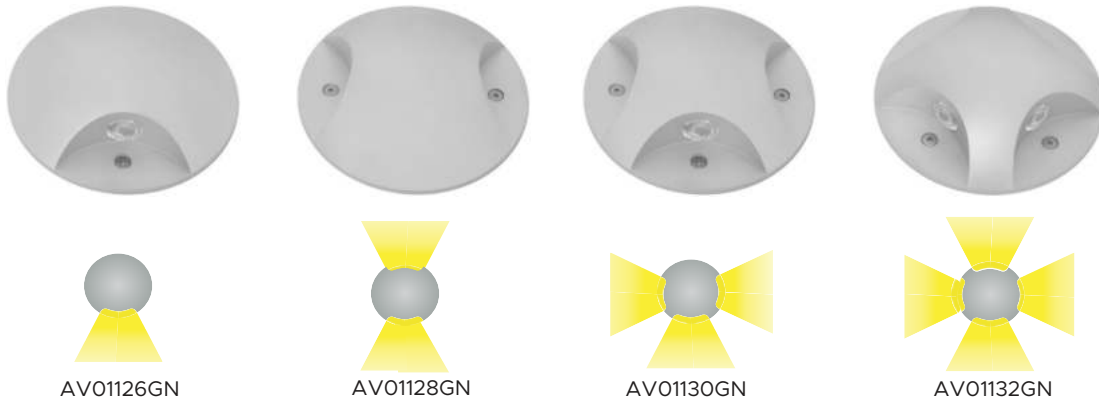


| | | | | | | | | | | | | | | | | | | | | | | |
|-------------------------------|---|-----|-----|---------|------|-------|---|---|--|--|--|--|--|--|--|-----|-----|-----|-----|---------|------|-------|
| POWER SUPPLY | max 2W - 220V/240V | | | | | | | | | | | | | | | | | | | | | |
| CODE | AV01126GN AV01128GN AV01130GN AV01132GN | | | | | | | | | | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue | | | | | | | | | | | | | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> <td>T</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>30°x65°</td> <td>110°</td> <td>Diff.</td> </tr> </table> | N | M | W | X | E | T | D | | | | | | | | 10° | 25° | 40° | 60° | 30°x65° | 110° | Diff. |
| N | M | W | X | E | T | D | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | 30°x65° | 110° | Diff. | | | | | | | | | | | | | | | | |
| FINISHES | G - Grey B - Black | | | | | | | | | | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 150lm (3000°K, 500mA) - AV01126GN | | | | | | | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 120lm (3000°K, 500mA, 40°) - AV01126GN | | | | | | | | | | | | | | | | | | | | | |
| LED NUMBER | 1 power LED - AV01126GN | | | | | | | | | | | | | | | | | | | | | |
| MATERIAL | body and head in anodized aluminium | | | | | | | | | | | | | | | | | | | | | |
| DRIVER | included | | | | | | | | | | | | | | | | | | | | | |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable | | | | | | | | | | | | | | | | | | | | | |
| MOUNTING | recessed (floor) | | | | | | | | | | | | | | | | | | | | | |
| ACCESSORIES | outer case code: AV01425GN | | | | | | | | | | | | | | | | | | | | | |
| NOTES | 24V version on request | | | | | | | | | | | | | | | | | | | | | |


Ceiling recessed




Outdoor - Ceiling recessed



| | |
|-------------------------------|---|
| POWER SUPPLY | max 1W - max 350mA |
| CODE | AV01458GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue |
| OPTICS | M W X E T D 20° 35° 50° 20°x45° 110° Diff. |
| FINISHES | G - Grey B - Black |
| LUMEN OUTPUT SOURCE | 110lm (3000°K, 350mA) |
| DELIVERED LUMEN OUTPUT | 100lm (3000°K, 350mA, 35°) |
| LED NUMBER | 1 power LED |
| MATERIAL | body and flange in anodized aluminium |
| DRIVER | not included |
| POWER CABLE | includes 0,5 mt Sub4 FROST-UV 2 x 0,25 cable |
| WIRING | in series |
| MOUNTING | recessed (ceiling, wall) |
| NOTES | |




| | |
|-------------------------------|---|
| POWER SUPPLY | max 1W - max 350mA |
| CODE | AV01459GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue |
| FINISHES | I - Inox AISI 316L |
| LUMEN OUTPUT SOURCE | 110lm (3000°K, 350mA) |
| DELIVERED LUMEN OUTPUT | 100lm (3000°K, 350mA, 35°) |
| LED NUMBER | 1 power LED |
| MATERIAL | body in anodized aluminium, flange in Inox AISI 316L |
| DRIVER | not included |
| POWER CABLE | includes 0,5 mt Sub4 FROST-UV 2 x 0,25 cable |
| WIRING | in series |
| MOUNTING | recessed (ceiling, wall) |
| NOTES | |



Ø 19mm



| | |
|-------------------------------|---|
| POWER SUPPLY | max 1W - max 350mA |
| CODE | AV01174GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue |
| OPTICS | M W X E T D 20° 35° 50° 20°x45° 110° Diff. |
| FINISHES | I - Inox AISI 316L |
| LUMEN OUTPUT SOURCE | 110lm (3000°K, 350mA) |
| DELIVERED LUMEN OUTPUT | 100lm (3000°K, 350mA, 35°) |
| LED NUMBER | 1 power LED |
| MATERIAL | body and flange in Inox AISI 316L |
| DRIVER | not included |
| POWER CABLE | includes 0,5 mt Sub4 FROST-UV 2 x 0,25 cable |
| WIRING | in series |
| MOUNTING | recessed (ceiling, wall) |
| NOTES | |



Ø 31mm



A A+ A++


| | |
|-------------------------------|---|
| POWER SUPPLY | max 2W - max 500mA |
| CODE | AV01145GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue |
| OPTICS | N M W X E T D 10° 25° 40° 60° 30°x65° 110° Diff. |
| FINISHES | G - Grey B - Black |
| LUMEN OUTPUT SOURCE | 150lm (3000°K, 500mA) |
| DELIVERED LUMEN OUTPUT | 120lm (3000°K, 500mA, 40°) |
| LED NUMBER | 1 power LED |
| MATERIAL | body and flange in anodized aluminium |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable |
| WIRING | in series |
| MOUNTING | recessed (ceiling, wall) |
| NOTES | 24V version on request |

Ø 31mm



A A+ A++


| | |
|-------------------------------|---|
| POWER SUPPLY | max 2W - max 500mA |
| CODE | AV01147GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue |
| OPTICS | N M W X E T D 10° 25° 40° 60° 30°x65° 110° Diff. |
| FINISHES | I - Inox AISI 316L |
| LUMEN OUTPUT SOURCE | 150lm (3000°K, 500mA) |
| DELIVERED LUMEN OUTPUT | 120lm (3000°K, 500mA, 40°) |
| LED NUMBER | 1 power LED |
| MATERIAL | body in anodized aluminium, flange in Inox AISI 316L |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable |
| WIRING | in series |
| MOUNTING | recessed (ceiling, wall) |
| NOTES | 24V version on request |

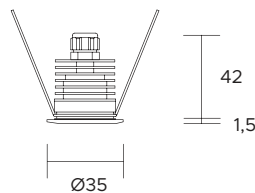

Ø 31mm




| | | | | | | | | | | | | | | | | | | | | | | |
|-------------------------------|---|-----|-----|---------|------|-------|---|---|--|--|--|--|--|--|--|-----|-----|-----|-----|---------|------|-------|
| POWER SUPPLY | max 1W - max 350mA | | | | | | | | | | | | | | | | | | | | | |
| CODE | AV01175GN | | | | | | | | | | | | | | | | | | | | | |
| LED COLOUR | <ul style="list-style-type: none"> C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue | | | | | | | | | | | | | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> <td>T</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>30°x65°</td> <td>110°</td> <td>Diff.</td> </tr> </table> | N | M | W | X | E | T | D | | | | | | | | 10° | 25° | 40° | 60° | 30°x65° | 110° | Diff. |
| N | M | W | X | E | T | D | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | 30°x65° | 110° | Diff. | | | | | | | | | | | | | | | | |
| FINISHES | I - Inox AISI 316L | | | | | | | | | | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 110lm (3000°K, 350mA) | | | | | | | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 100lm (3000°K, 350mA, 40°) | | | | | | | | | | | | | | | | | | | | | |
| LED NUMBER | 1 power LED | | | | | | | | | | | | | | | | | | | | | |
| MATERIAL | body and flange in Inox AISI 316L | | | | | | | | | | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | | | | | | | | | | |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable | | | | | | | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | | | | | | | |
| MOUNTING | recessed (ceiling, wall) | | | | | | | | | | | | | | | | | | | | | |
| NOTES | 24V version on request | | | | | | | | | | | | | | | | | | | | | |

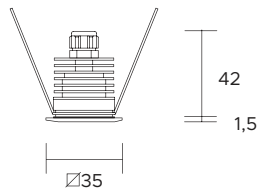

Ø 31mm



| | | | | | | | | | | | | | | | | | | | | | | |
|-------------------------------|---|-----|-----|---------|------|-------|---|---|--|--|--|--|--|--|--|-----|-----|-----|-----|---------|------|-------|
| POWER SUPPLY | max 2W - max 500mA | | | | | | | | | | | | | | | | | | | | | |
| CODE | AV01149GN | | | | | | | | | | | | | | | | | | | | | |
| LED COLOUR | <ul style="list-style-type: none"> C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue | | | | | | | | | | | | | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> <td>T</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>30°x65°</td> <td>110°</td> <td>Diff.</td> </tr> </table> | N | M | W | X | E | T | D | | | | | | | | 10° | 25° | 40° | 60° | 30°x65° | 110° | Diff. |
| N | M | W | X | E | T | D | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | 30°x65° | 110° | Diff. | | | | | | | | | | | | | | | | |
| FINISHES | <ul style="list-style-type: none"> G - Grey B - Black | | | | | | | | | | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 150lm (3000°K, 500mA) | | | | | | | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 120lm (3000°K, 500mA, 40°) | | | | | | | | | | | | | | | | | | | | | |
| LED NUMBER | 1 power LED | | | | | | | | | | | | | | | | | | | | | |
| MATERIAL | body and flange in anodized aluminium | | | | | | | | | | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | | | | | | | | | | |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable | | | | | | | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | | | | | | | |
| MOUNTING | recessed (ceiling, wall) | | | | | | | | | | | | | | | | | | | | | |
| NOTES | 24V version on request | | | | | | | | | | | | | | | | | | | | | |



Ø 37mm



A+ A+ A+


| | |
|-------------------------------|---|
| POWER SUPPLY | max 3W - max 700mA |
| CODE | AV01151GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue |
| OPTICS | N 10° M 25° W 40° X 60° T 110° D Diff. |
| FINISHES | G - Grey B - Black |
| LUMEN OUTPUT SOURCE | 190lm (3000°K, 700mA) |
| DELIVERED LUMEN OUTPUT | 160lm (3000°K, 700mA, 40°) |
| LED NUMBER | 1 power LED |
| MATERIAL | body and flange in anodized aluminium |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable |
| WIRING | in series |
| MOUNTING | recessed (ceiling, wall) |
| NOTES | 24V version on request |

Ø 37mm




A+ A+ A+


| | |
|-------------------------------|---|
| POWER SUPPLY | max 3W - max 700mA |
| CODE | AV01153GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue |
| OPTICS | N 10° M 25° W 40° X 60° T 110° D Diff. |
| FINISHES | I - Inox AISI 316L |
| LUMEN OUTPUT SOURCE | 190lm (3000°K, 700mA) |
| DELIVERED LUMEN OUTPUT | 160lm (3000°K, 700mA, 40°) |
| LED NUMBER | 1 power LED |
| MATERIAL | body in anodized aluminium, flange in Inox AISI 316L |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable |
| WIRING | in series |
| MOUNTING | recessed (ceiling, wall) |
| NOTES | 24V version on request |

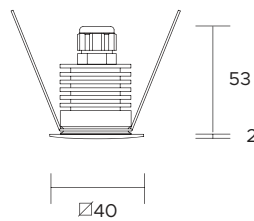

Ø 37mm




| | | | | | | | | | | | | | | | | | | | |
|-------------------------------|---|-----|-----|------|-------|---|---|--|--|--|--|--|--|-----|-----|-----|-----|------|-------|
| POWER SUPPLY | max 3W - max 700mA | | | | | | | | | | | | | | | | | | |
| CODE | AV01155GN | | | | | | | | | | | | | | | | | | |
| LED COLOUR | <ul style="list-style-type: none"> C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue | | | | | | | | | | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>T</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> <td>Diff.</td> </tr> </table> | N | M | W | X | T | D | | | | | | | 10° | 25° | 40° | 60° | 110° | Diff. |
| N | M | W | X | T | D | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | 110° | Diff. | | | | | | | | | | | | | | |
| FINISHES | <ul style="list-style-type: none"> G - Grey B - Black | | | | | | | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 190lm (3000°K, 700mA) | | | | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 160lm (3000°K, 700mA, 40°) | | | | | | | | | | | | | | | | | | |
| LED NUMBER | 1 power LED | | | | | | | | | | | | | | | | | | |
| MATERIAL | body and flange in anodized aluminium | | | | | | | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | | | | | | | |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable | | | | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | | | | |
| MOUNTING | surface (ceiling, wall) | | | | | | | | | | | | | | | | | | |
| NOTES | 24V version on request | | | | | | | | | | | | | | | | | | |



Ø 43mm




| | |
|-------------------------------|---|
| POWER SUPPLY | max 3W - max 350mA |
| CODE | AV01159GN |
| LED COLOUR | <ul style="list-style-type: none"> C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue |
| OPTICS | |
| FINISHES | I - Inox AISI 316L |
| LUMEN OUTPUT SOURCE | 330lm (3000°K, 350mA) |
| DELIVERED LUMEN OUTPUT | 260lm (3000°K, 350mA, 30°) |
| LED NUMBER | 3 power LEDs |
| MATERIAL | body in anodized aluminium, flange in Inox AISI 316L |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable |
| WIRING | in series |
| MOUNTING | recessed (ceiling, wall) |
| NOTES | 24V version on request |

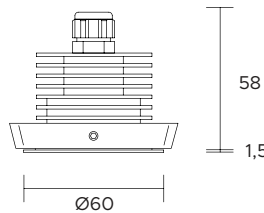

| | |
|-------------------------------|---|
| POWER SUPPLY | max 3W - max 350mA |
| CODE | AV01163GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue |
| OPTICS | N 15° M 25° W 40° T 110° D Diff. |
| FINISHES | I - Inox AISI 316L |
| LUMEN OUTPUT SOURCE | 330lm (3000°K, 350mA) |
| DELIVERED LUMEN OUTPUT | 260lm (3000°K, 350mA, 40°) |
| LED NUMBER | 3 power LEDs |
| MATERIAL | body in anodized aluminium, flange in Inox AISI 316L |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable |
| WIRING | in series |
| MOUNTING | recessed (ceiling, wall) |
| NOTES | 24V version on request, hex louver on request |


| | |
|-------------------------------|---|
| POWER SUPPLY | max 9W - max 700mA |
| CODE | AV01163GN |
| LED COLOUR | 1 - RGB 2 - AWB 3 - A WW W |
| OPTICS | N 15° M 25° W 40° T 110° D Diff. |
| FINISHES | I - Inox AISI 316L |
| LUMEN OUTPUT SOURCE | 390lm (RGB, 700mA) |
| DELIVERED LUMEN OUTPUT | 360lm (RGB, 700mA, 40°) |
| LED NUMBER | 3 power LEDs |
| MATERIAL | body in anodized aluminium, flange in Inox AISI 316L |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Liyy AD8 6 x 0,35 cable |
| WIRING | in series |
| MOUNTING | recessed (ceiling, wall) |
| NOTES | 24V version on request, hex louver on request |

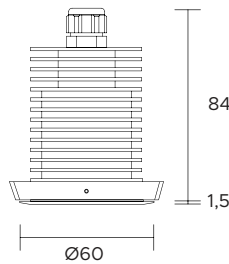

| | | | | | | | | | | |
|-------------------------------|---|-----|---|---|--|--|--|-----|-----|-----|
| POWER SUPPLY | max 6W - max 500mA | | | | | | | | | |
| CODE | AV01165GN | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue | | | | | | | | | |
| OPTICS | <table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> </tr> </table> | N | M | W | | | | 15° | 25° | 40° |
| N | M | W | | | | | | | | |
| | | | | | | | | | | |
| 15° | 25° | 40° | | | | | | | | |
| FINISHES | I - Inox AISI 316L | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 450lm (3000°K, 500mA) | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 350lm (3000°K, 500mA, 40°) | | | | | | | | | |
| LED NUMBER | 3 power LEDs | | | | | | | | | |
| MATERIAL | body in anodized aluminium, flange in Inox AISI 316L | | | | | | | | | |
| DRIVER | not included | | | | | | | | | |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable | | | | | | | | | |
| WIRING | in series | | | | | | | | | |
| MOUNTING | recessed (ceiling, wall) | | | | | | | | | |
| NOTES | 24V version on request, hex louver on request | | | | | | | | | |




| | | | | | | | | | | |
|-------------------------------|--|-----|---|---|--|--|--|-----|-----|-----|
| POWER SUPPLY | max 9W - max 700mA | | | | | | | | | |
| CODE | AV01165GN | | | | | | | | | |
| LED COLOUR | 1 - RGB 2 - AWB 3 - A WW W | | | | | | | | | |
| OPTICS | <table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> </tr> </table> | N | M | W | | | | 15° | 25° | 40° |
| N | M | W | | | | | | | | |
| | | | | | | | | | | |
| 15° | 25° | 40° | | | | | | | | |
| FINISHES | I - Inox AISI 316L | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 390lm (RGB, 700mA) | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 360lm (RGB, 700mA, 40°) | | | | | | | | | |
| LED NUMBER | 3 power LEDs | | | | | | | | | |
| MATERIAL | body in anodized aluminium, flange in Inox AISI 316L | | | | | | | | | |
| DRIVER | not included | | | | | | | | | |
| POWER CABLE | includes 1,5 mt Liyy-AD8 6 x 0,35 cable | | | | | | | | | |
| WIRING | in series | | | | | | | | | |
| MOUNTING | recessed (ceiling, wall) | | | | | | | | | |
| NOTES | 24V version on request, hex louver on request | | | | | | | | | |

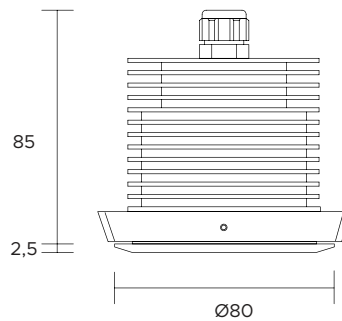

Ø 78mm




| | | | | | | | | | | | | | |
|-------------------------------|--|-----|-------|---|---|--|--|--|--|-----|-----|-----|-------|
| POWER SUPPLY | max 6W - max 350mA | | | | | | | | | | | | |
| CODE | AV01171GN | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K | | | | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> <td>Diff.</td> </tr> </table> | N | M | W | D | | | | | 15° | 25° | 40° | Diff. |
| N | M | W | D | | | | | | | | | | |
| | | | | | | | | | | | | | |
| 15° | 25° | 40° | Diff. | | | | | | | | | | |
| FINISHES | I - Inox AISI 316L | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 890lm (3000°K, 350mA) | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 650lm (3000°K, 350mA, 40°) | | | | | | | | | | | | |
| LED NUMBER | 1 power LED multichip | | | | | | | | | | | | |
| MATERIAL | body in anodized aluminium, flange in Inox AISI 316L | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | |
| MOUNTING | recessed (ceiling, wall) | | | | | | | | | | | | |
| NOTES | hex louver on request | | | | | | | | | | | | |

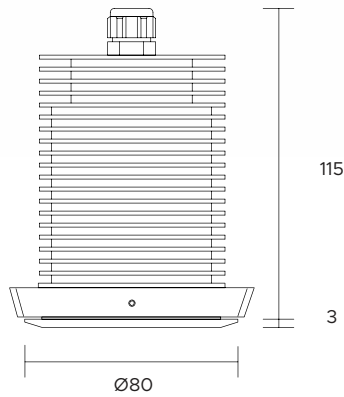

Ø 78mm




| | | | | | | | | | | | | | |
|-------------------------------|--|-----|-------|---|---|--|--|--|--|-----|-----|-----|-------|
| POWER SUPPLY | max 12W - max 350mA | | | | | | | | | | | | |
| CODE | AV01575GN | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K | | | | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> <td>Diff.</td> </tr> </table> | N | M | W | D | | | | | 15° | 25° | 40° | Diff. |
| N | M | W | D | | | | | | | | | | |
| | | | | | | | | | | | | | |
| 15° | 25° | 40° | Diff. | | | | | | | | | | |
| FINISHES | I - Inox AISI 316L | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 1730lm (3000°K, 350mA) | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 1290lm (3000°K, 350mA, 40°) | | | | | | | | | | | | |
| LED NUMBER | 1 power LED multichip | | | | | | | | | | | | |
| MATERIAL | body in anodized aluminium, flange in Inox AISI 316L | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0.50 cable | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | |
| MOUNTING | recessed (ceiling, wall) | | | | | | | | | | | | |
| NOTES | hex louver on request | | | | | | | | | | | | |



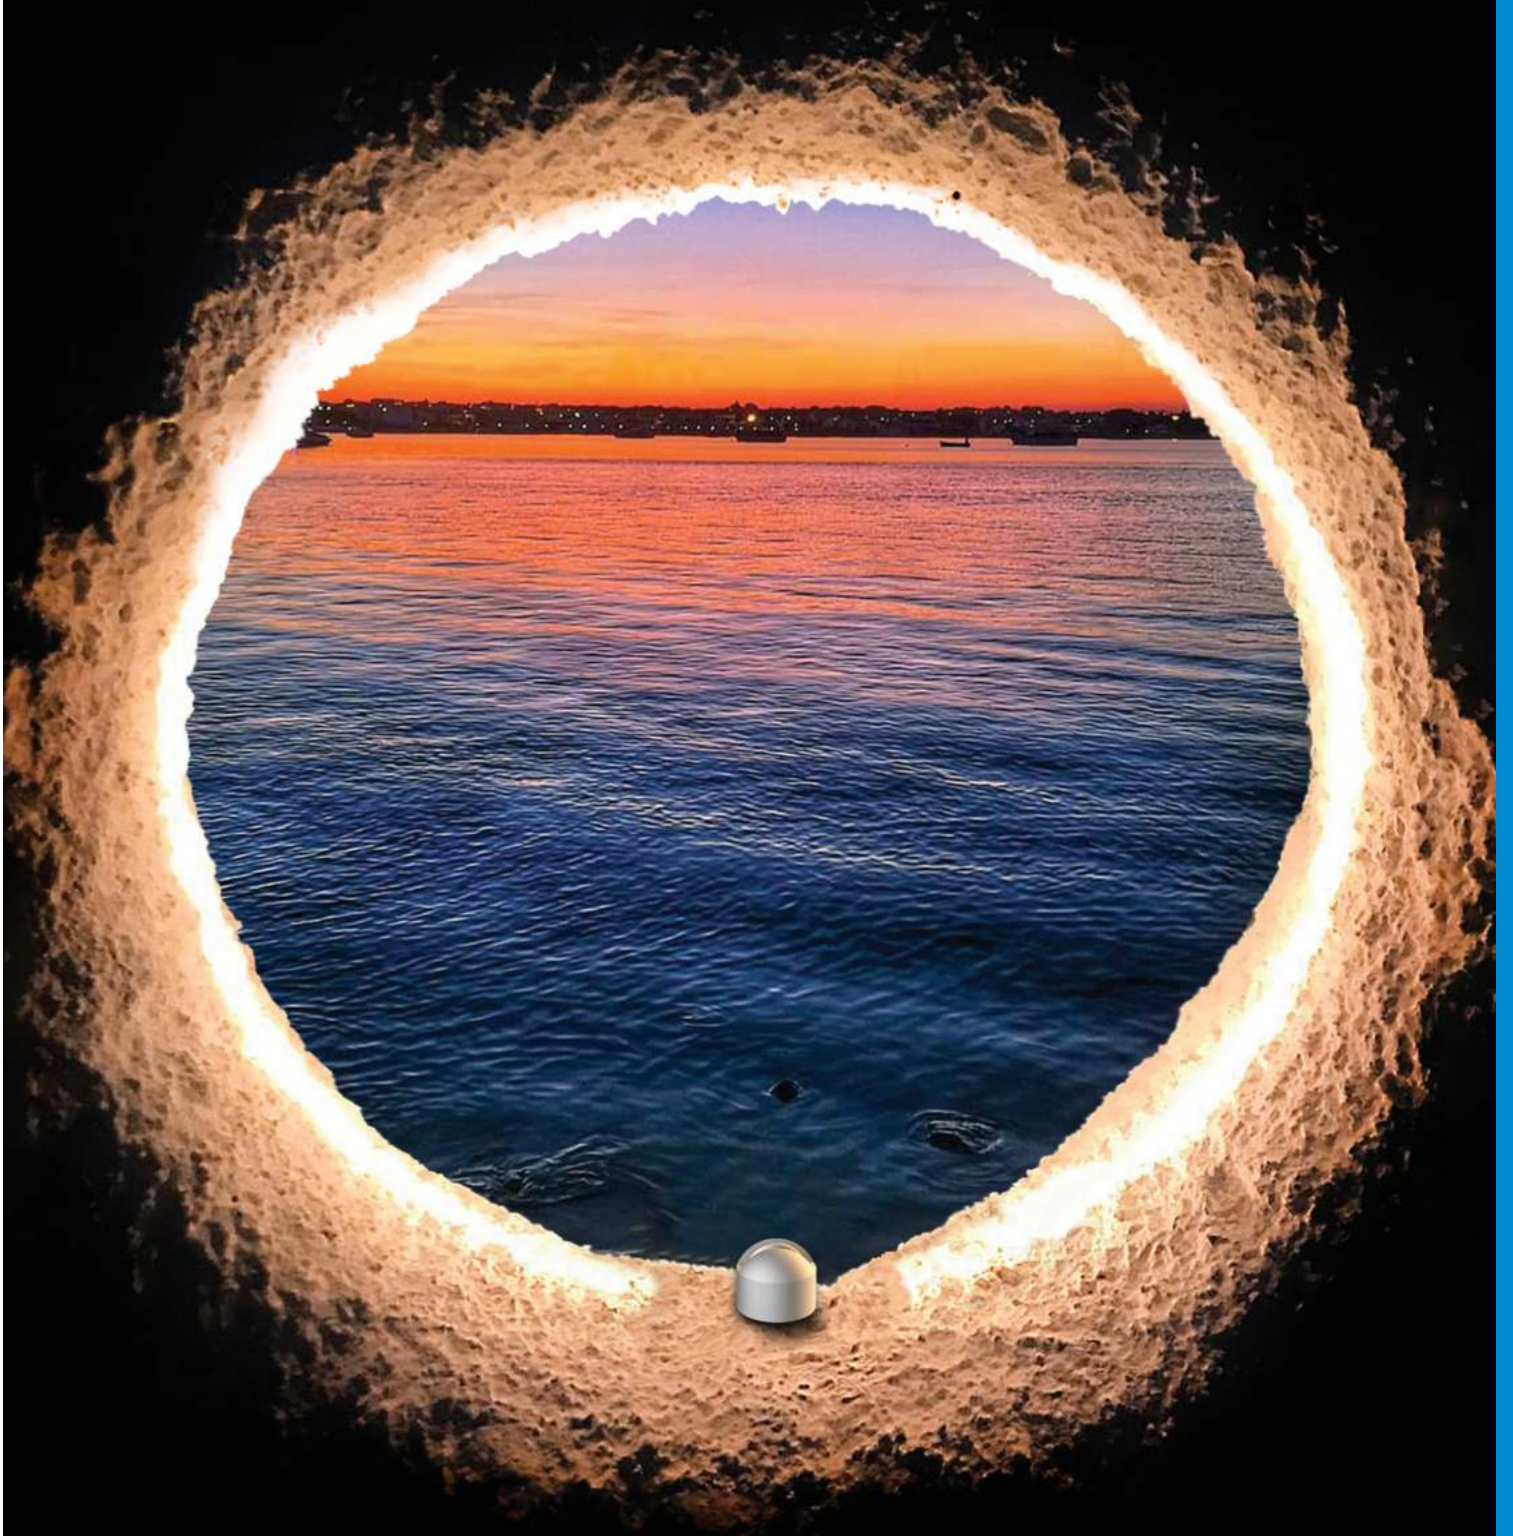


Outdoor - Ceiling recessed

Wall recessed


Outdoor - Wall recessed

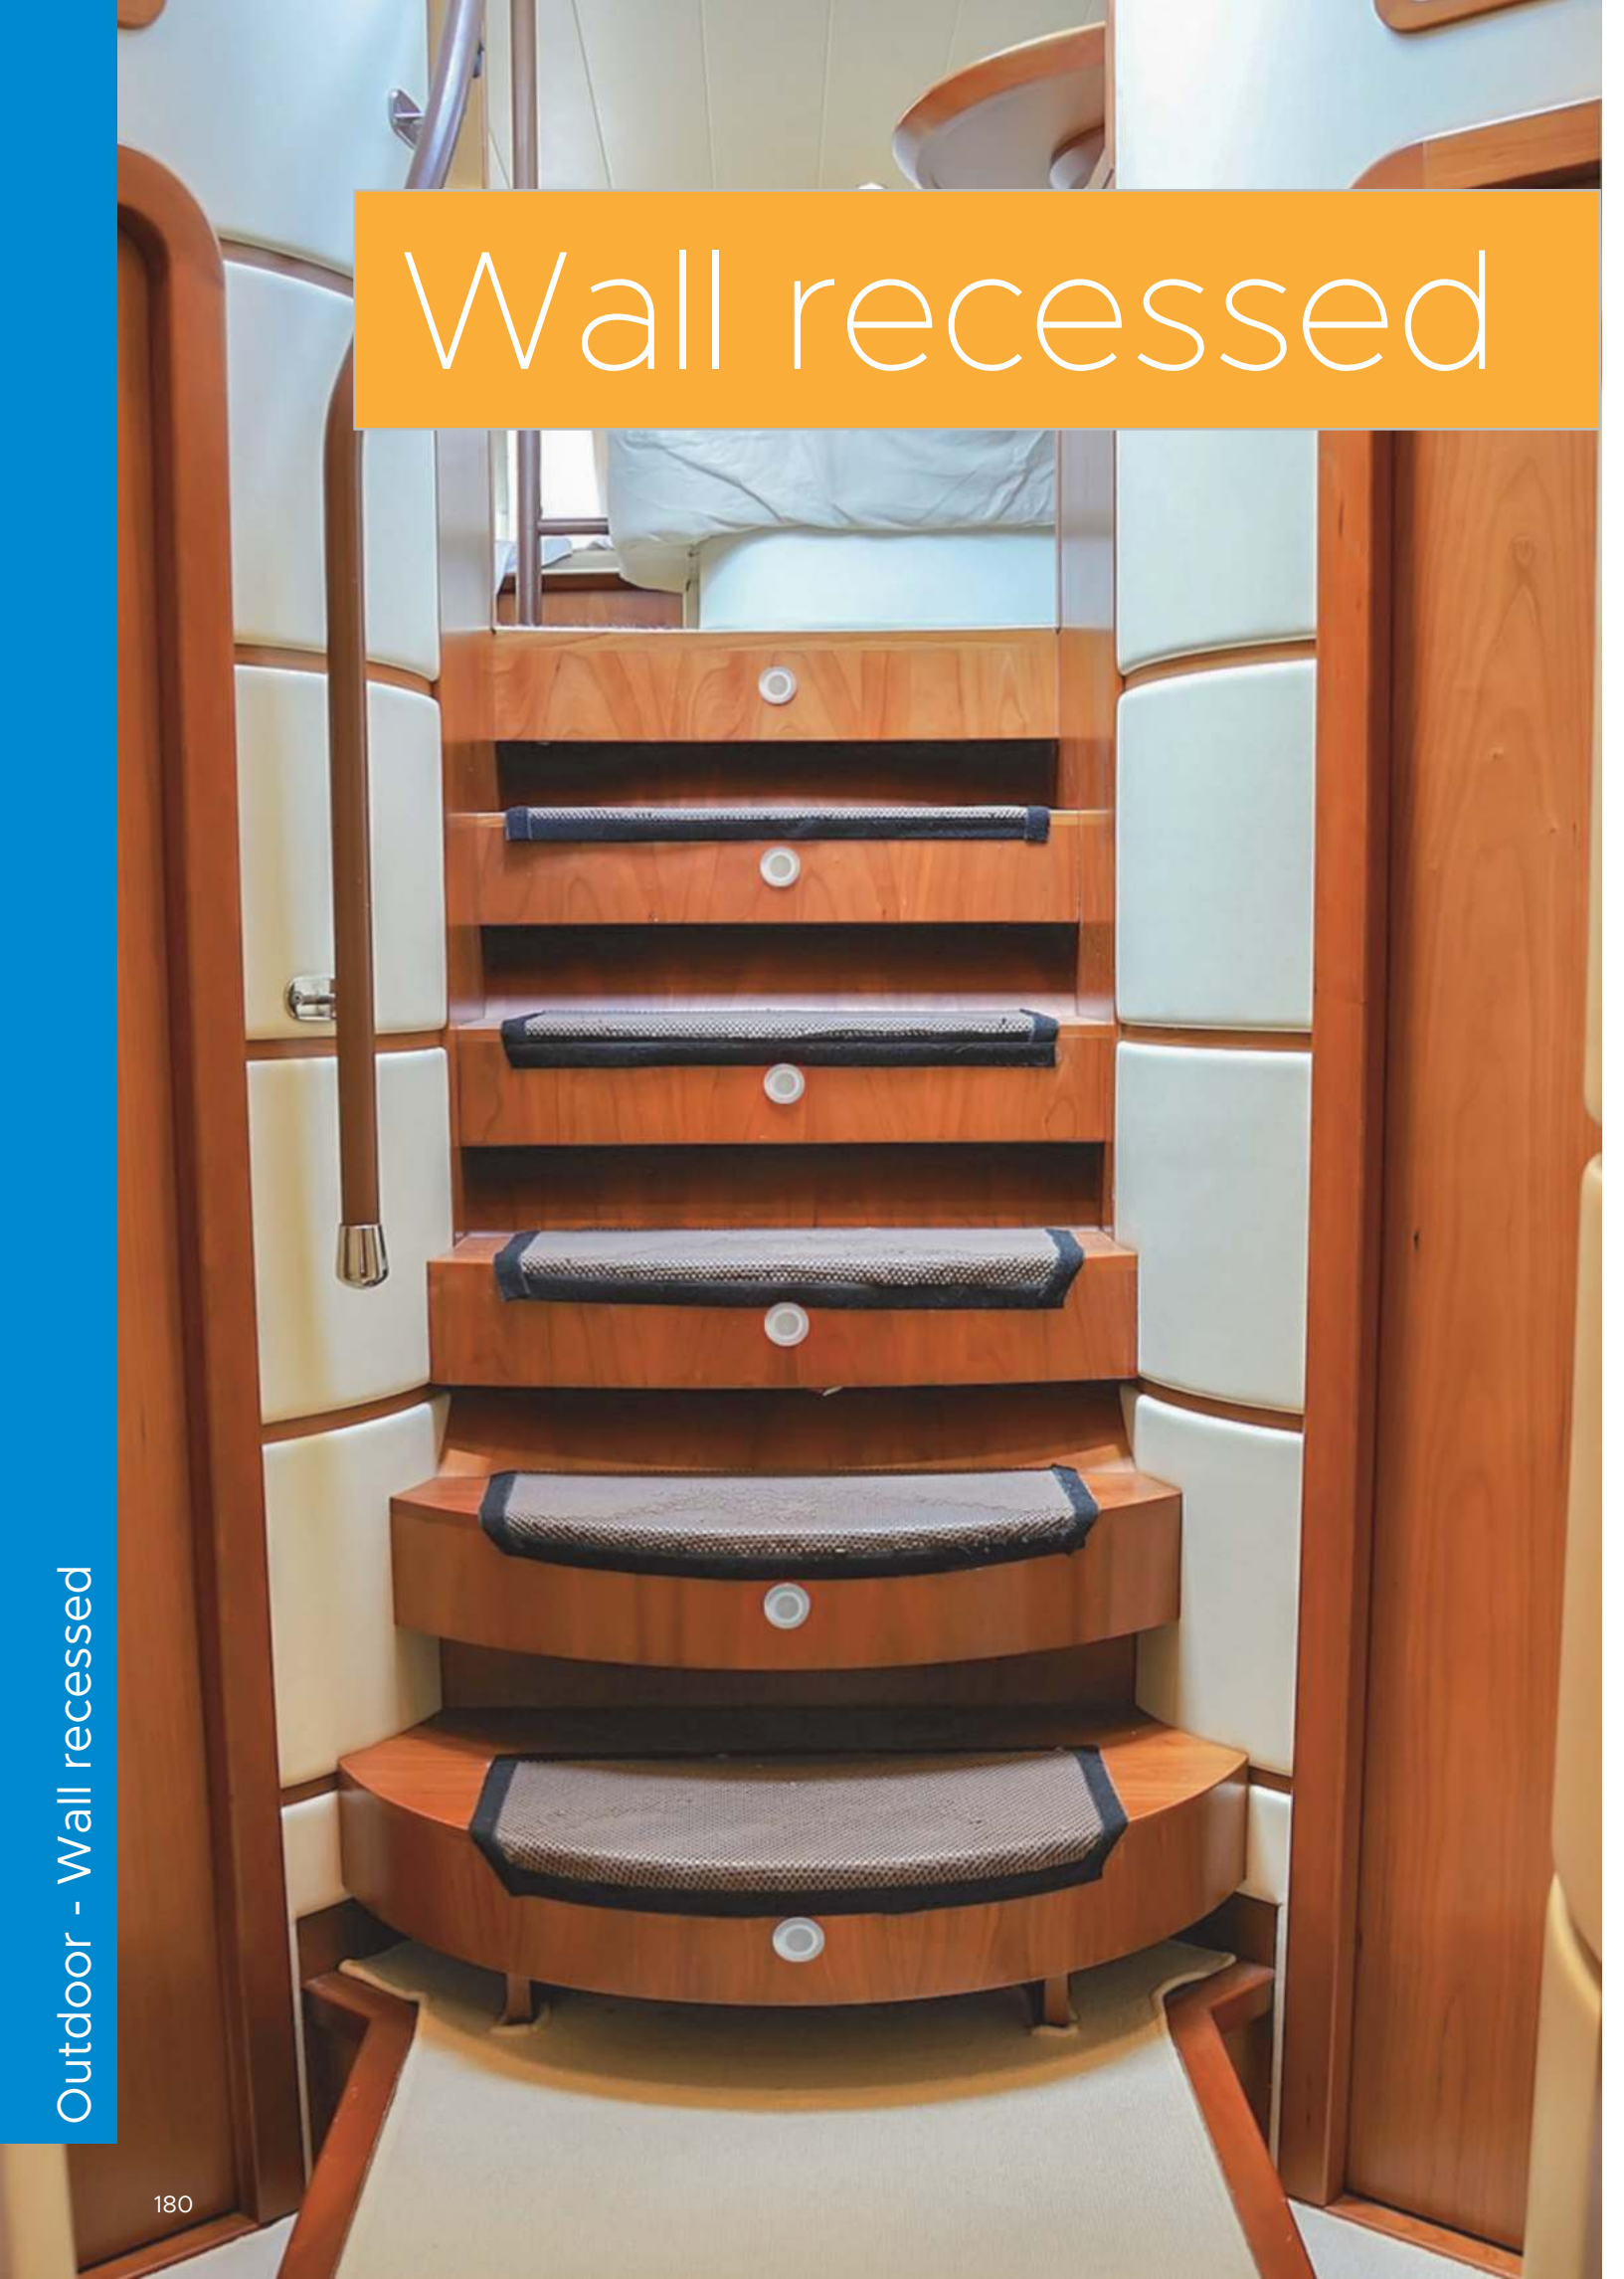

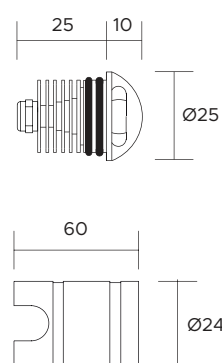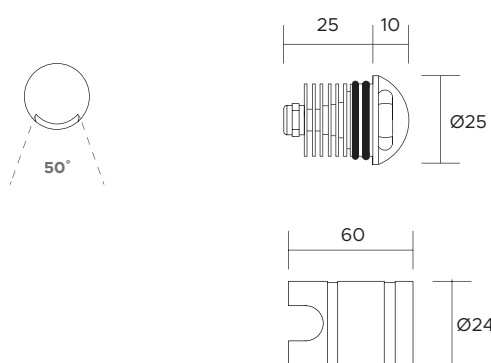


| | |
|-------------------------------|---|
| POWER SUPPLY | max 2W - max 500mA |
| CODE | AV01202GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue |
| FINISHES | G - Grey B - Black |
| LUMEN OUTPUT SOURCE | 150lm (3000°K, 500mA) |
| DELIVERED LUMEN OUTPUT | 90lm (3000°K, 500mA) |
| LED NUMBER | 1 power LED |
| MATERIAL | body and head in anodized aluminium |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable |
| WIRING | in series |
| MOUNTING | recessed (wall) |
| ACCESSORIES | outer case code: AV01203GN |
| NOTES | |




| | |
|-------------------------------|---|
| POWER SUPPLY | max 2W - max 500mA |
| CODE | AV01204GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue |
| FINISHES | G - Grey B - Black |
| LUMEN OUTPUT SOURCE | 150lm (3000°K, 500mA) |
| DELIVERED LUMEN OUTPUT | 90lm (3000°K, 500mA) |
| LED NUMBER | 1 power LED |
| MATERIAL | body and head in anodized aluminium |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable |
| WIRING | in series |
| MOUNTING | recessed (wall) |
| ACCESSORIES | outer case code: AV01203GN |
| NOTES | |

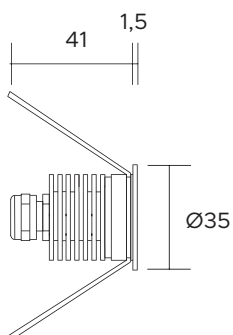



Ø 31mm



| | |
|-------------------------------|---|
| POWER SUPPLY | max 2W - max 500mA |
| CODE | AV01280GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue |
| OPTICS |  Asymmetric |
| FINISHES | G - Grey B - Black |
| LUMEN OUTPUT SOURCE | 150lm (3000°K, 500mA) |
| DELIVERED LUMEN OUTPUT | 120lm (3000°K, 500mA, 45° Asy.) |
| LED NUMBER | 1 power LED |
| MATERIAL | body and flange in anodized aluminium |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2x 0,50 cable |
| WIRING | in series |
| MOUNTING | recessed (wall) |
| ACCESSORIES | |
| NOTES | 24V version on request |

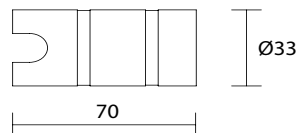




| | |
|-------------------------------|---|
| POWER SUPPLY | max 2W - max 500mA |
| CODE | AV01279GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue |
| OPTICS |  Asymmetric |
| FINISHES | G - Grey B - Black |
| LUMEN OUTPUT SOURCE | 150lm (3000°K, 500mA) |
| DELIVERED LUMEN OUTPUT | 120lm (3000°K, 500mA, 45° Asy.) |
| LED NUMBER | 1 power LED |
| MATERIAL | body and flange in anodized aluminium |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable |
| WIRING | in series |
| MOUNTING | recessed (wall) |
| ACCESSORIES | outer case code: AV01214GN |
| NOTES | 24V version on request |

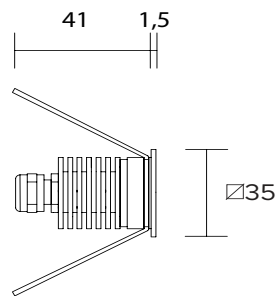




Ø 31mm







| | |
|-------------------------------|---|
| POWER SUPPLY | max 2W - max 500mA |
| CODE | AV01305GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue |
| OPTICS |  Asymmetric |
| FINISHES | G - Grey B - Black |
| LUMEN OUTPUT SOURCE | 150lm (3000°K, 500mA) |
| DELIVERED LUMEN OUTPUT | 120lm (3000°K, 500mA, 45° Asy.) |
| LED NUMBER | 1 power LED |
| MATERIAL | body and flange in anodized aluminium |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable |
| WIRING | in series |
| MOUNTING | recessed (wall) |
| ACCESSORIES | |
| NOTES | 24V version on request |

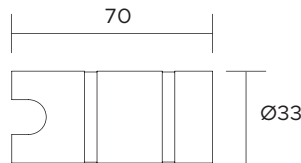

| | |
|-------------------------------|---|
| POWER SUPPLY | max 2W - max 500mA |
| CODE | AV01304GN |
| LED COLOUR | <ul style="list-style-type: none"> C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue |
| OPTICS | <p style="text-align: center;">A</p>  <p style="text-align: center;">Asymmetric</p> |
| FINISHES | <ul style="list-style-type: none"> G - Grey B - Black |
| LUMEN OUTPUT SOURCE | 150lm (3000°K, 500mA) |
| DELIVERED LUMEN OUTPUT | 120lm (3000°K, 500mA, 45° Asy.) |
| LED NUMBER | 1 power LED |
| MATERIAL | body and flange in anodized aluminium |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable |
| WIRING | in series |
| MOUNTING | recessed (wall) |
| ACCESSORIES | outer case code: AV01214GN |
| NOTES | 24V version on request |



Ø 17,5mm

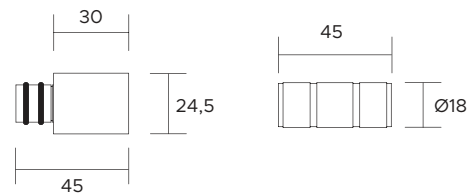

| | |
|-------------------------------|---|
| POWER SUPPLY | max 2W - max 500mA |
| CODE | AV01315GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue |
| OPTICS | N 10° M 25° W 40° X 60° T 110° D Diff. |
| FINISHES | G - Grey B - Black |
| LUMEN OUTPUT SOURCE | 150lm (3000°K, 500mA) |
| DELIVERED LUMEN OUTPUT | 120lm (3000°K, 500mA, 40°) |
| LED NUMBER | 1 power LED |
| MATERIAL | body and flange in anodized aluminium |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable |
| WIRING | in series |
| MOUNTING | recessed (wall) |
| ACCESSORIES | |
| NOTES | |




| | |
|-------------------------------|---|
| POWER SUPPLY | max 2W - max 500mA |
| CODE | AV01314GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue |
| OPTICS | N 10° M 25° W 40° X 60° T 110° D Diff. |
| FINISHES | G - Grey B - Black |
| LUMEN OUTPUT SOURCE | 150lm (3000°K, 500mA) |
| DELIVERED LUMEN OUTPUT | 120lm (3000°K, 500mA, 40°) |
| LED NUMBER | 1 power LED |
| MATERIAL | body and flange in anodized aluminium |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable |
| WIRING | in series |
| MOUNTING | recessed (wall) |
| ACCESSORIES | outer case code: AV01316GN |
| NOTES | |



Linear Lights




Outdoor - Linear Lights



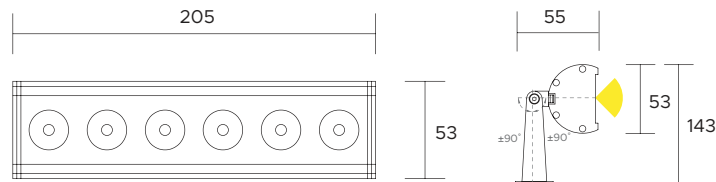




| | |
|-------------------------------|---|
| POWER SUPPLY | max 6W - max 350mA |
| CODE | AV01428GN, AV01336GN (110°) |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue |
| OPTICS | N 10° M 25° W 40° X 60° E 30°x65° T 110° |
| FINISHES | G - Grey |
| LUMEN OUTPUT SOURCE | 660lm (3000°K, 350mA) |
| DELIVERED LUMEN OUTPUT | 640lm (3000°K, 350mA, 40°) |
| LED NUMBER | 6 power LEDs |
| MATERIAL | body in anodized aluminium |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable |
| WIRING | in series |
| MOUNTING | surface (ceiling, wall, floor) |
| NOTES | 24V version on request |


| | |
|-------------------------------|--|
| POWER SUPPLY | max 18W - max 700mA |
| CODE | AV01428GN, AV01336GN (110°) |
| LED COLOUR | 1 - RGB 2 - AWB 3 - A WW W |
| OPTICS | N 10° M 25° W 40° X 60° E 30°x65° T 110° |
| FINISHES | G - Grey |
| LUMEN OUTPUT SOURCE | 780lm (RGB, 700mA) |
| DELIVERED LUMEN OUTPUT | 720lm (RGB, 700mA, 40°) |
| LED NUMBER | 6 power LEDs |
| MATERIAL | body in anodized aluminium |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Liyy AD8 6 x 0,35 cable |
| WIRING | in series |
| MOUNTING | surface (ceiling, wall, floor) |

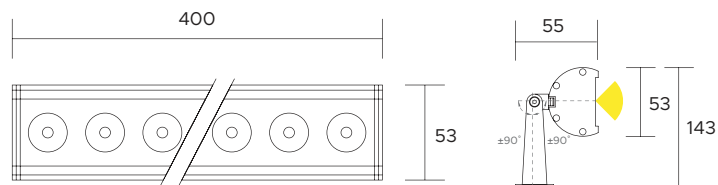





| | | | | | | | | | | | | | | | | | | | |
|-------------------------------|---|-----|-----|---------|------|---|---|--|--|--|--|--|--|-----|-----|-----|-----|---------|------|
| POWER SUPPLY | max 12W - max 350mA | | | | | | | | | | | | | | | | | | |
| CODE | AV01432GN, AV01340GN (110°) | | | | | | | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue | | | | | | | | | | | | | | | | | | |
| OPTICS | <table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> <td>T</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>30°x65°</td> <td>110°</td> </tr> </table> | N | M | W | X | E | T | | | | | | | 10° | 25° | 40° | 60° | 30°x65° | 110° |
| N | M | W | X | E | T | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | 30°x65° | 110° | | | | | | | | | | | | | | |
| FINISHES | G - Grey | | | | | | | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 1320lm (3000°K, 350mA) | | | | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 1280lm (3000°K, 350mA, 40°) | | | | | | | | | | | | | | | | | | |
| LED NUMBER | 12 power LEDs | | | | | | | | | | | | | | | | | | |
| MATERIAL | body in anodized aluminium | | | | | | | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | | | | | | | |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable | | | | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | | | | |
| MOUNTING | surface (ceiling, wall, floor) | | | | | | | | | | | | | | | | | | |
| NOTES | 24V version on request | | | | | | | | | | | | | | | | | | |

| | | | | | | | | | | | | | | | | | | | |
|-------------------------------|---|-----|-----|---------|------|---|---|--|--|--|--|--|--|-----|-----|-----|-----|---------|------|
| POWER SUPPLY | max 36W - max 700mA | | | | | | | | | | | | | | | | | | |
| CODE | AV01432GN, AV01340GN (110°) | | | | | | | | | | | | | | | | | | |
| LED COLOUR | 1 - RGB 2 - AWB 3 - A WW W | | | | | | | | | | | | | | | | | | |
| OPTICS | <table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> <td>T</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>30°x65°</td> <td>110°</td> </tr> </table> | N | M | W | X | E | T | | | | | | | 10° | 25° | 40° | 60° | 30°x65° | 110° |
| N | M | W | X | E | T | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | 30°x65° | 110° | | | | | | | | | | | | | | |
| FINISHES | G - Grey | | | | | | | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 1560lm (RGB, 700mA) | | | | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 1440lm (RGB, 700mA, 40°) | | | | | | | | | | | | | | | | | | |
| LED NUMBER | 12 power LEDs | | | | | | | | | | | | | | | | | | |
| MATERIAL | body in anodized aluminium | | | | | | | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | | | | | | | |
| POWER CABLE | includes 1,5 mt Liyy AD8 6 x 0,35 cable | | | | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | | | | |
| MOUNTING | surface (ceiling, wall, floor) | | | | | | | | | | | | | | | | | | |

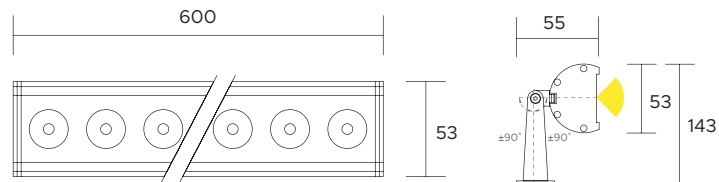




| | |
|-------------------------------|--|
| POWER SUPPLY | max 18W - max 350mA |
| CODE | AV01434GN, AV01342GN (110°) |
| LED COLOUR | <p>C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue</p> |
| OPTICS | <p>N M W X E T </p> |
| FINISHES | G - Grey |
| LUMEN OUTPUT SOURCE | 1980lm (3000°K, 350mA) |
| DELIVERED LUMEN OUTPUT | 1400lm (3000°K, 350mA, 40°) |
| LED NUMBER | 18 power LEDs |
| MATERIAL | body in anodized aluminium |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable |
| WIRING | in series |
| MOUNTING | surface (ceiling, wall, floor) |
| NOTES | 24V version on request |

| | |
|-------------------------------|---|
| POWER SUPPLY | max 54W - max 700mA |
| CODE | AV01434GN, AV01342GN (110°) |
| LED COLOUR | <p>1 - RGB 2 - AWB 3 - A WW W</p> |
| OPTICS | <p>N M W X E T </p> |
| FINISHES | G - Grey |
| LUMEN OUTPUT SOURCE | 2340lm (RGB, 700mA) |
| DELIVERED LUMEN OUTPUT | 2160lm (RGB, 700mA, 40°) |
| LED NUMBER | 18 power LEDs |
| MATERIAL | body in anodized aluminium |
| DRIVER | not included |
| POWER CABLE | includes 1,5 mt Liyy AD8 6 x 0,35 cable |
| WIRING | in series |
| MOUNTING | surface (ceiling, wall, floor) |
| NOTES | |

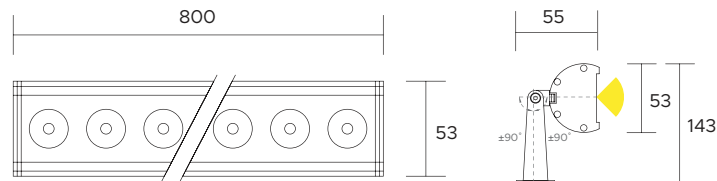

| | | | | | | | | | | | | | | | | | | | |
|-------------------------------|---|-----|-----|---------|------|---|---|--|--|--|--|--|--|-----|-----|-----|-----|---------|------|
| POWER SUPPLY | max 24W - max 350mA | | | | | | | | | | | | | | | | | | |
| CODE | AV01436GN, AV01344GN (110°) | | | | | | | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue | | | | | | | | | | | | | | | | | | |
| OPTICS | <table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> <td>T</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>30°x65°</td> <td>110°</td> </tr> </table> | N | M | W | X | E | T | | | | | | | 10° | 25° | 40° | 60° | 30°x65° | 110° |
| N | M | W | X | E | T | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | 30°x65° | 110° | | | | | | | | | | | | | | |
| FINISHES | G - Grey | | | | | | | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 2640lm (3000°K, 350mA) | | | | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 2260lm (3000°K, 350mA, 40°) | | | | | | | | | | | | | | | | | | |
| LED NUMBER | 24 power LEDs | | | | | | | | | | | | | | | | | | |
| MATERIAL | body in anodized aluminium | | | | | | | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | | | | | | | |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable | | | | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | | | | |
| MOUNTING | surface (ceiling, wall, floor) | | | | | | | | | | | | | | | | | | |
| NOTES | 24V version on request | | | | | | | | | | | | | | | | | | |

| | | | | | | | | | | | | | | | | | | | |
|-------------------------------|---|-----|-----|---------|------|---|---|--|--|--|--|--|--|-----|-----|-----|-----|---------|------|
| POWER SUPPLY | max 72W - max 700mA | | | | | | | | | | | | | | | | | | |
| CODE | AV01436GN, AV01344GN (110°) | | | | | | | | | | | | | | | | | | |
| LED COLOUR | 1 - RGB 2 - AWB 3 - A WW W | | | | | | | | | | | | | | | | | | |
| OPTICS | <table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> <td>T</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>30°x65°</td> <td>110°</td> </tr> </table> | N | M | W | X | E | T | | | | | | | 10° | 25° | 40° | 60° | 30°x65° | 110° |
| N | M | W | X | E | T | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | 30°x65° | 110° | | | | | | | | | | | | | | |
| FINISHES | G - Grey | | | | | | | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 3120lm (RGB, 700mA) | | | | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 2880lm (RGB, 700mA, 40°) | | | | | | | | | | | | | | | | | | |
| LED NUMBER | 24 power LEDs | | | | | | | | | | | | | | | | | | |
| MATERIAL | body in anodized aluminium | | | | | | | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | | | | | | | |
| POWER CABLE | includes 1,5 mt Liyy AD8 6 x 0,35 cable | | | | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | | | | |
| MOUNTING | surface (ceiling, wall, floor) | | | | | | | | | | | | | | | | | | |
| NOTES | | | | | | | | | | | | | | | | | | | |

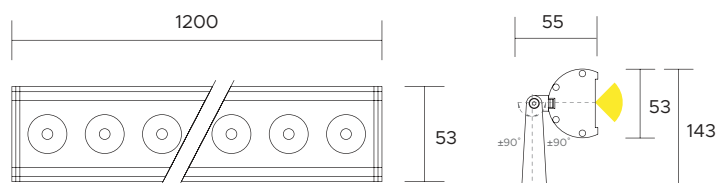

| | | | | | | | | | | | | | | | | | | | |
|-------------------------------|--|-----|-----|---------|------|---|---|--|--|--|--|--|--|-----|-----|-----|-----|---------|------|
| POWER SUPPLY | max 36W - max 350mA | | | | | | | | | | | | | | | | | | |
| CODE | ST036 ■ ■ ■ ■ | | | | | | | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue | | | | | | | | | | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td><td>M</td><td>W</td><td>X</td><td>E</td><td>T</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>10°</td><td>25°</td><td>40°</td><td>60°</td><td>30°x65°</td><td>110°</td> </tr> </table> | N | M | W | X | E | T | | | | | | | 10° | 25° | 40° | 60° | 30°x65° | 110° |
| N | M | W | X | E | T | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | 30°x65° | 110° | | | | | | | | | | | | | | |
| FINISHES | G - Grey | | | | | | | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 3960lm (3000°K, 350mA) | | | | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 2800lm (3000°K, 350mA, 40°) | | | | | | | | | | | | | | | | | | |
| LED NUMBER | 36 power LEDs | | | | | | | | | | | | | | | | | | |
| MATERIAL | body in anodized aluminium | | | | | | | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | | | | | | | |
| POWER CABLE | includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable | | | | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | | | | |
| MOUNTING | surface (ceiling, wall, floor) | | | | | | | | | | | | | | | | | | |
| NOTES | 24V version on request | | | | | | | | | | | | | | | | | | |

| | | | | | | | | | | | | | | | | | | | |
|-------------------------------|--|-----|-----|---------|------|---|---|--|--|--|--|--|--|-----|-----|-----|-----|---------|------|
| POWER SUPPLY | max 108W - max 700mA | | | | | | | | | | | | | | | | | | |
| CODE | ST036 ■ ■ ■ ■ | | | | | | | | | | | | | | | | | | |
| LED COLOUR | 1 - RGB 2 - AWB 3 - A WW W | | | | | | | | | | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td><td>M</td><td>W</td><td>X</td><td>E</td><td>T</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>10°</td><td>25°</td><td>40°</td><td>60°</td><td>30°x65°</td><td>110°</td> </tr> </table> | N | M | W | X | E | T | | | | | | | 10° | 25° | 40° | 60° | 30°x65° | 110° |
| N | M | W | X | E | T | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | 30°x65° | 110° | | | | | | | | | | | | | | |
| FINISHES | G - Grey | | | | | | | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 4680lm (RGB, 700mA) | | | | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 4320lm (RGB, 700mA, 40°) | | | | | | | | | | | | | | | | | | |
| LED NUMBER | 36 power LEDs | | | | | | | | | | | | | | | | | | |
| MATERIAL | body in anodized aluminium | | | | | | | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | | | | | | | |
| POWER CABLE | includes 1,5 mt Liyy AD8 6 x 0,35 cable | | | | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | | | | |
| MOUNTING | surface (ceiling, wall, floor) | | | | | | | | | | | | | | | | | | |



Garden Lights







Garden lights
pag. 199



Garden lights
pag. 201



Garden lights
pag. 203



Garden lights
pag. 205



Garden lights
pag. 207



Garden lights
pag. 209




Garden lights
pag. 211



Garden lights
pag. 213



Garden lights
pag. 215



Garden lights
pag. 217



Garden lights
pag. 219



Garden lights
pag. 221



Garden lights
pag. 223



Garden lights
pag. 225



Garden lights
pag. 227



Garden lights
pag. 229




Garden lights
pag. 231




Garden lights
pag. 233



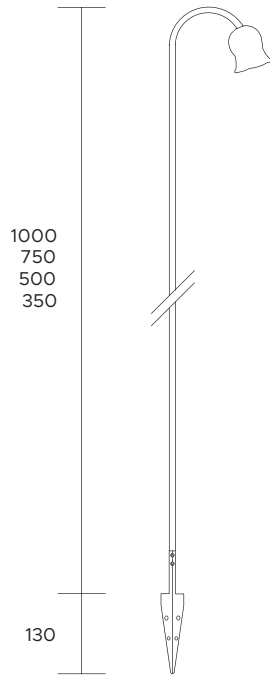


| | | | | | | | | | | | | | | | | |
|-------------------------------|---|-----|-----|------|---|---|--|--|--|--|--|-----|-----|-----|-----|------|
| POWER SUPPLY | max 3W - max 700mA | | | | | | | | | | | | | | | |
| CODE | AV01442GN, AV01449GN | | | | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K | | | | | | | | | | | | | | | |
| OPTICS | <table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>T</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> </tr> </table> | N | M | W | X | T | | | | | | 10° | 25° | 40° | 60° | 110° |
| N | M | W | X | T | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | 110° | | | | | | | | | | | | |
| FINISHES (SPOTLIGHT) | W - White P - Pink V - Violet | | | | | | | | | | | | | | | |
| FINISHES (STEM) | M - Marble Green B - Black | | | | | | | | | | | | | | | |
| STEM LENGHT | 1 - 350mm - AV01442GN 2 - 500mm - AV01442GN 3 - 750mm - AV01449GN 4 - 1000mm - AV01449GN | | | | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 190lm (3000°K, 700mA) | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 160lm (3000°K, 700mA, 40°) | | | | | | | | | | | | | | | |
| LED NUMBER | 1 power LED | | | | | | | | | | | | | | | |
| MATERIAL | head in painted aluminium stem in painted brass | | | | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | | | | |
| POWER CABLE | includes 2 mt Sub4 FROST- UV 2 x 0,50 cable | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | |
| MOUNTING | fixing (floor) | | | | | | | | | | | | | | | |
| NOTES | other RAL on request other heights on request 24V version on request | | | | | | | | | | | | | | | |



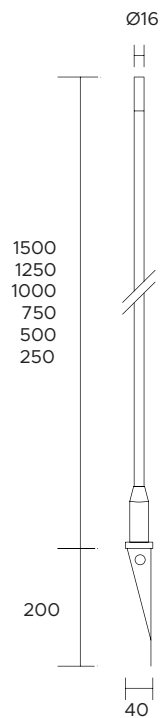


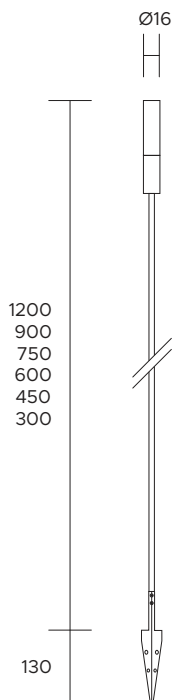
| | |
|-------------------------------|---|
| POWER SUPPLY CODE | max 3W - max 700mA AV01351GN, AV01356GN, AV01357GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CR190 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue |
| OPTICS | D 360° Diffused |
| FINISHES | I - Inox AISI 316L |
| STEM LENGHT | 1 - 250mm - AV01351GN 2 - 500mm - AV01351GN 3 - 750mm - AV01356GN 4 - 1000mm - AV01356GN 5 - 1250mm - AV01357GN 6 - 1500mm - AV01357GN |
| LUMEN OUTPUT SOURCE | 190lm (3000°K, 700mA) |
| DELIVERED LUMEN OUTPUT | 110lm (3000°K, 700mA, 360° Diff.) |
| LED NUMBER | 1 power LED |
| MATERIAL | body in Inox AISI 316L |
| DRIVER | not included |
| POWER CABLE | includes 2 mt Sub4 FROST- UV 2 x 0,50 cable |
| WIRING | in series |
| MOUNTING | fixing (floor) |
| NOTES | other heights on request 24V version on request RGB version on request |



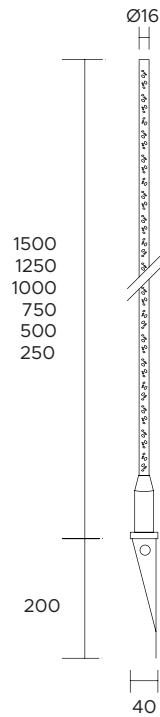


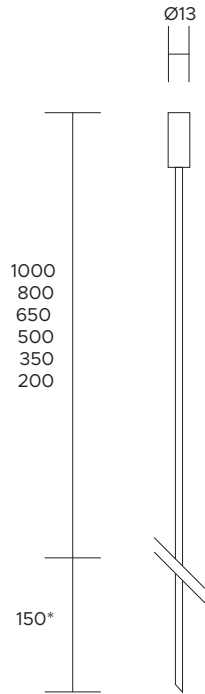
| | |
|-------------------------------|---|
| POWER SUPPLY | max 3W - max 700mA |
| CODE | AV01529GN, AV01530GN, AV01531GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue |
| OPTICS | D  360° Diffused |
| FINISHES | I - Inox AISI 316L |
| STEM LENGHT | 1 - 250mm - AV01529GN 2 - 500mm - AV01529GN 3 - 750mm - AV01530GN 4 - 1000mm - AV01530GN 5 - 1250mm - AV01531GN 6 - 1500mm - AV01531GN |
| LUMEN OUTPUT SOURCE | 190lm (3000°K, 700mA) |
| DELIVERED LUMEN OUTPUT | 110lm (3000°K, 700mA, 360° Diff.) |
| LED NUMBER | 1 power LED |
| MATERIAL | body in Inox AISI 316L |
| DRIVER | not included |
| POWER CABLE | includes 2 mt Sub4 FROST- UV 2 x 0,50 cable |
| WIRING | in series |
| MOUNTING | fixing (floor) |
| NOTES | other heights on request 24V version on request RGB version on request |






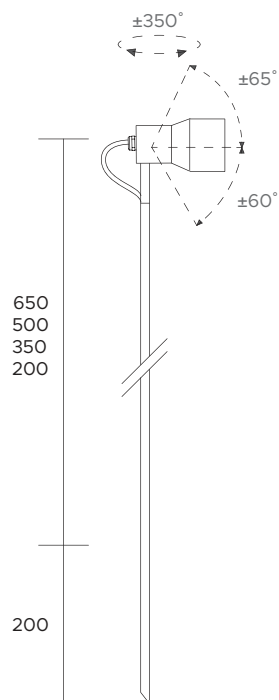
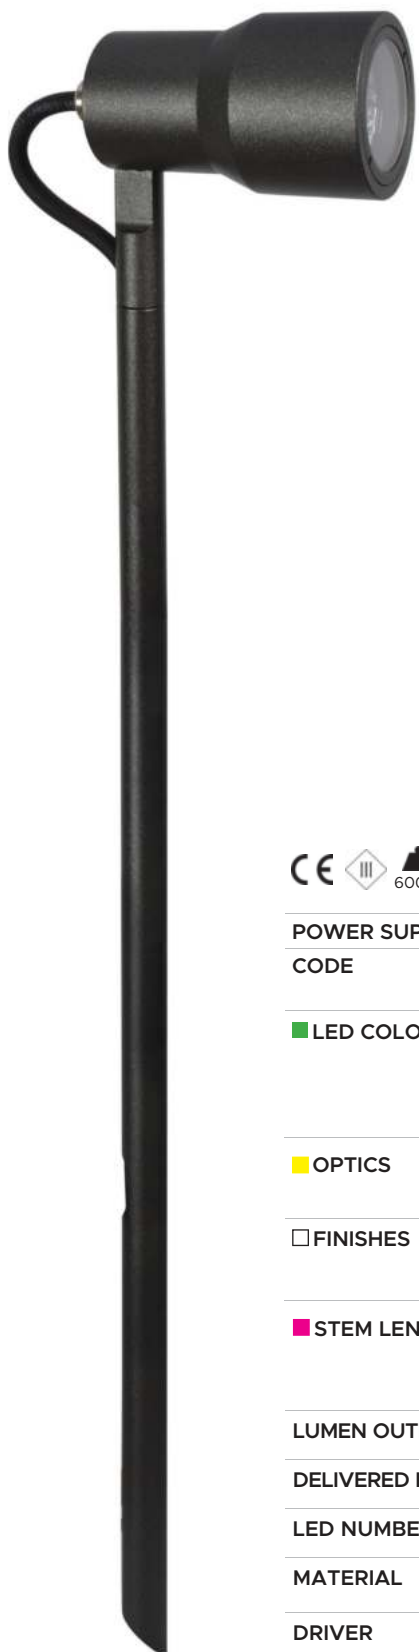
| | |
|-------------------------------|---|
| POWER SUPPLY | max 3W - max 700mA |
| CODE | AV01440GN, AV01447GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue |
| OPTICS | D  360° Diffused |
| FINISHES | G - Grey M - Marble Green B - Black |
| STEM LENGHT | 1 - 300mm - AV01440GN 2 - 450mm - AV01440GN 3 - 600mm - AV01440GN 4 - 750mm - AV01447GN 5 - 900mm - AV01447GN 6 - 1200mm - AV01447GN |
| LUMEN OUTPUT SOURCE | 190lm (3000°K, 700mA) |
| DELIVERED LUMEN OUTPUT | 110lm (3000°K, 700mA, 360° Diff.) |
| LED NUMBER | 1 power LED |
| MATERIAL | head in painted aluminium stem in painted brass |
| DRIVER | not included |
| POWER CABLE | includes 2 mt Sub4 FROST- UV 2 x 0,50 cable |
| WIRING | in series |
| MOUNTING | fixing (floor) |
| NOTES | other RAL on request other heights on request 24V version on request |






| | |
|-------------------------------|---|
| POWER SUPPLY | max 2W - max 500mA |
| CODE | AV01453GN, AV01456GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue |
| OPTICS |  360° Diffused |
| FINISHES | G - Grey M - Marble Green B - Black |
| STEM LENGHT | 1 - 200mm - AV01453GN 2 - 350mm - AV01453GN 3 - 500mm - AV01453GN 4 - 650mm - AV01456GN 5 - 800mm - AV01456GN 6 - 1000mm - AV01456GN |
| LUMEN OUTPUT SOURCE | 150lm (3000°K, 500mA) |
| DELIVERED LUMEN OUTPUT | 90lm (3000°K, 500mA, 360° Diff.) |
| LED NUMBER | 1 power LED |
| MATERIAL | head in painted aluminium stem in painted brass |
| DRIVER | not included |
| POWER CABLE | includes 2 mt Sub4 FROST- UV 2 x 0,25 cable |
| WIRING | in series |
| MOUNTING | fixing (floor) |
| NOTES | *the recessed part changes according to the height other RAL on request other heights on request 24V version on request |






| | | | | | | | | | | | |
|-------------------------------|--|-------------------------|---|---|---|--|--|--|-----|-----|-----|
| POWER SUPPLY | max 9W - max 500mA | | | | | | | | | | |
| CODE | AV01365GN, AV01460GN AV01355GN, AV01364GN | with spike with base | | | | | | | | | |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K | | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>M</td> <td>W</td> <td>X</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>24°</td> <td>36°</td> <td>60°</td> </tr> </table> | | M | W | X | | | | 24° | 36° | 60° |
| M | W | X | | | | | | | | | |
| | | | | | | | | | | | |
| 24° | 36° | 60° | | | | | | | | | |
| FINISHES | M - Marble green K - Corten G - Grey | | | | | | | | | | |
| STEM LENGHT | 1 - 200mm - AV01365GN, AV01355GN 2 - 350mm - AV01365GN, AV01355GN 3 - 500mm - AV01460GN, AV01365GN 4 - 650mm - AV01460GN, AV01365GN | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 1200lm (3000°K, 500mA) | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 1010lm (3000°K, 500mA, 36°) | | | | | | | | | | |
| LED NUMBER | 1 power LED multichip | | | | | | | | | | |
| MATERIAL | head in painted aluminium stem in painted inox AISI 316L | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | |
| POWER CABLE | includes 1,5 mt Sub4 FROST- UV 2 x 0,50 | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | |
| MOUNTING | fixing (floor) | | | | | | | | | | |
| NOTES | other RAL on request 24V version on request | | | | | | | | | | |



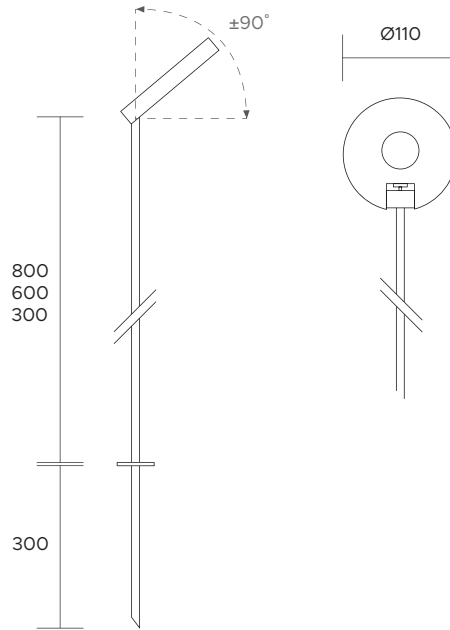


| | |
|-------------------------------|--|
| POWER SUPPLY | max 6W - max 350mA |
| CODE | AV01477GN, AV01576GN, AV01577GN |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CR190 Y - Warm white 2700°K |
| OPTICS | D Diffused |
| FINISHES SPOTLIGHT | M - Marble green K - Corten G - Grey |
| STEM LENGHT | 1 - 300mm - AV01477GN 2 - 600mm - AV01576GN 3 - 800mm - AV01577GN |
| LUMEN OUTPUT SOURCE | 890lm (3000°K, 350mA) |
| DELIVERED LUMEN OUTPUT | 460lm (3000°K, 350mA) |
| LED NUMBER | 1 power LED multichip |
| MATERIAL | head in painted aluminium stem in painted inox AISI 316L |
| DRIVER | not included |
| POWER CABLE | includes 2 mt Sub4 FROST- UV 2 x 0,50 cable |
| WIRING | in series |
| MOUNTING | fixing (floor) |
| NOTES | 24V version on request |



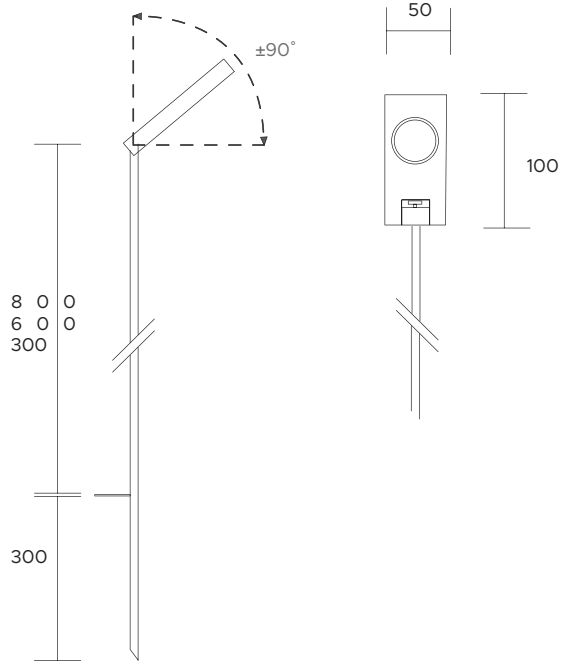


| | | | | | | | | | | |
|-------------------------------|--|-----|---|---|--|--|--|-----|-----|-----|
| POWER SUPPLY | max 6W - max 700mA | | | | | | | | | |
| CODE | AV01493GN, AV01494GN, AV01495GN | | | | | | | | | |
| LED COLOUR | C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K | | | | | | | | | |
| FINISHES SPOTLIGHT | M - Marble green K - Corten G - Grey | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> </tr> </table> | N | M | W | | | | 15° | 25° | 40° |
| N | M | W | | | | | | | | |
| | | | | | | | | | | |
| 15° | 25° | 40° | | | | | | | | |
| STEM LENGHT | 1 - 300mm - AV01493GN 2 - 600mm - AV01494GN 3 - 800mm - AV01495GN | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 800lm (3000°K, 700mA) | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 430lm (3000°K, 700mA, 25°) | | | | | | | | | |
| LED NUMBER | 1 power LED multichip | | | | | | | | | |
| MATERIAL | head in painted aluminium stem in painted inox AISI 316L | | | | | | | | | |
| DRIVER | not included | | | | | | | | | |
| POWER CABLE | includes 2 mt Sub4 FROST- UV 2 x 0,50 cable | | | | | | | | | |
| WIRING | in series | | | | | | | | | |
| MOUNTING | fixing (floor) | | | | | | | | | |
| NOTES | 24V version on request | | | | | | | | | |



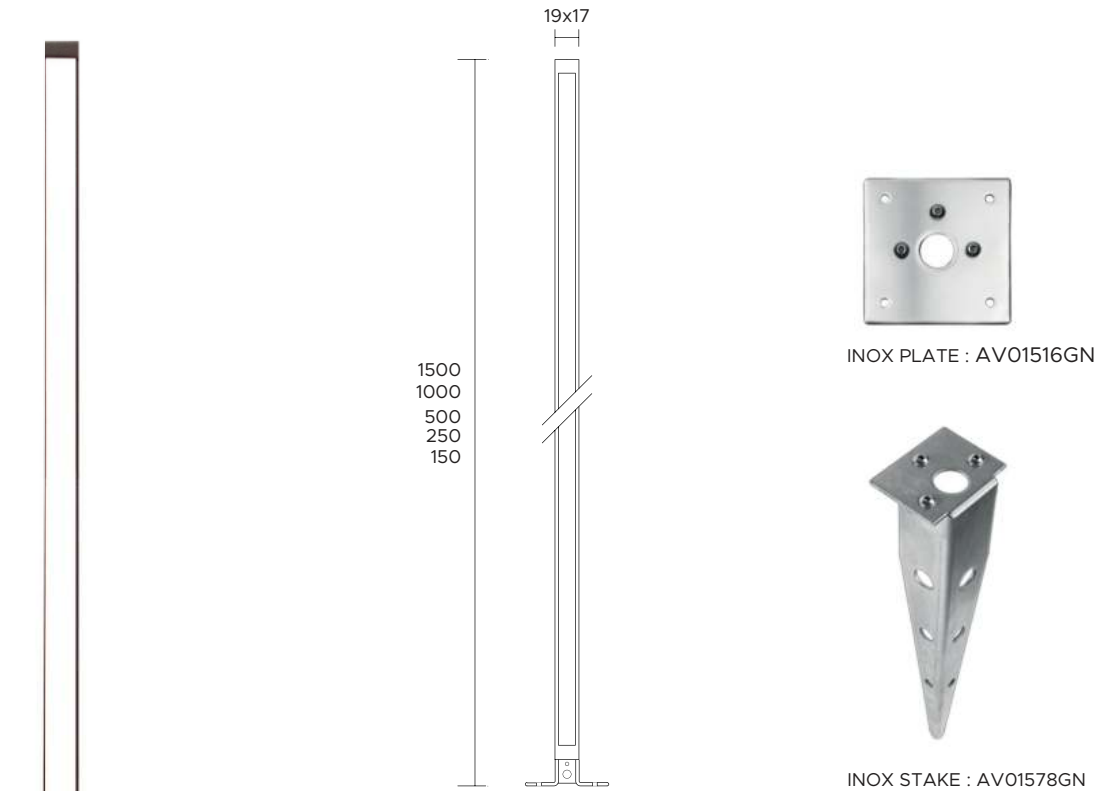


| | |
|-------------------------------|---|
| POWER SUPPLY | 15W/mt - 24V |
| CODE | AV01501GN, AV01508GN, AV01509GN, AV01510GN, AV01511GN |
| LED COLOUR | N - Natural white 4000°K W - Warm white 3000°K |
| OPTICS | D 160° Diffused |
| FINISHES | M - Marble green K - Corten G - Grey B - Black |
| STEM LENGHT | 1 - 150mm - AV01501GN 2 - 250mm - AV01508GN 3 - 500mm - AV01509GN 4 - 1000mm - AV01510GN 5 - 1500mm - AV01511GN |
| LUMEN OUTPUT SOURCE | 1000lm/mt (3000°K) |
| DELIVERED LUMEN OUTPUT | 1000lm/mt (3000°K, 160° Diff.) |
| MATERIAL | body in painted inox AISI 316L |
| DRIVER | not included |
| POWER CABLE | includes 2 mt Sub4 FROST- UV 2 x 0,50 cable |
| WIRING | in parallel |
| MOUNTING | fixing (floor) |
| NOTES | other RAL on request |
| ACCESSORIES | INOX PLATE : AV01516GN INOX STAKE : AV01578GN |



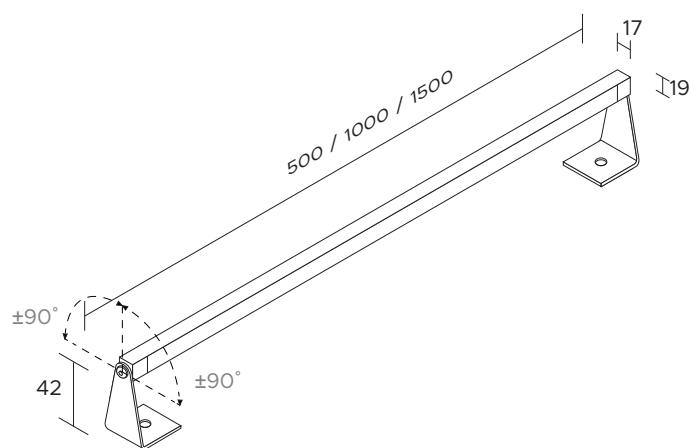


with brackets

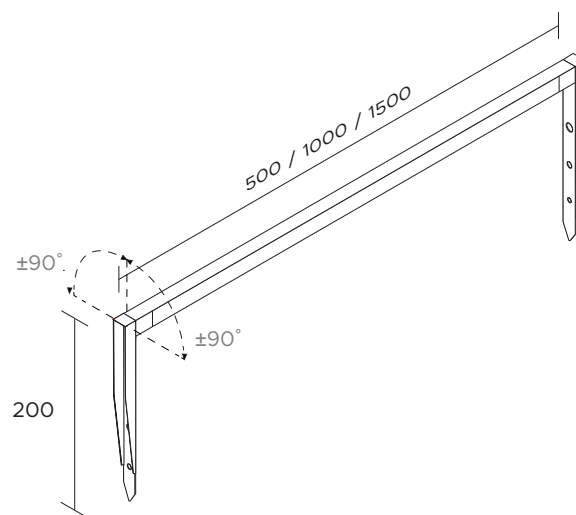


with spikes




| | | |
|-------------------------------|--|----------------------|
| POWER SUPPLY | 15W/mt - 24V | with brackets |
| CODE | AV01499GN, AV01504GN, AV01505GN | |
| LED COLOUR | N - Natural white 4000°K W - Warm white 3000°K | |
| OPTICS |  160° Diffused | |
| FINISHES | M - Marble green K - Corten G - Grey B - Black | |
| BODY LENGHT | 1 - 500mm - AV01499GN 2 - 1000mm - AV01504GN 3 - 1500mm - AV01505GN | |
| LUMEN OUTPUT SOURCE | 1000lm/mt (3000°K) | |
| DELIVERED LUMEN OUTPUT | 1000lm/mt (3000°K, 160° Diff.) | |
| MATERIAL | body in painted inox AISI 316L | |
| DRIVER | not included | |
| POWER CABLE | includes 2 mt Sub4 Frost- UV 2 x 0,50 cable | |
| WIRING | in parallel | |
| MOUNTING | surface (wall, floor) | |
| NOTES | other RAL on request | |


| | | |
|-------------------------------|--|--------------------|
| POWER SUPPLY | 15W/mt - 24V | with spikes |
| CODE | AV01500GN, AV01506GN, AV01507GN | |
| LED COLOUR | N - Natural white 4000°K W - Warm white 3000°K | |
| OPTICS |  160° Diffused | |
| FINISHES | M - Marble green K - Corten G - Grey B - Black | |
| BODY LENGHT | 1 - 500mm - AV01500GN 2 - 1000mm - AV01506GN 3 - 1500mm - AV01507GN | |
| LUMEN OUTPUT SOURCE | 1000lm/mt (3000°K) | |
| DELIVERED LUMEN OUTPUT | 1000lm/mt (3000°K, 160° Diff.) | |
| MATERIAL | body in anodized aluminium | |
| DRIVER | not included | |
| POWER CABLE | includes 2 mt Sub4 Frost- UV 2 x 0,50 cable | |
| WIRING | in parallel | |
| MOUNTING | fixing (floor) | |
| NOTES | other RAL on request | |



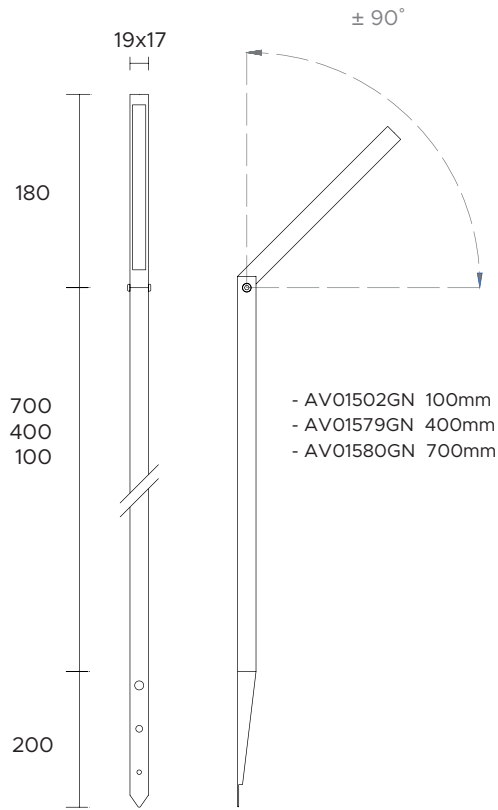


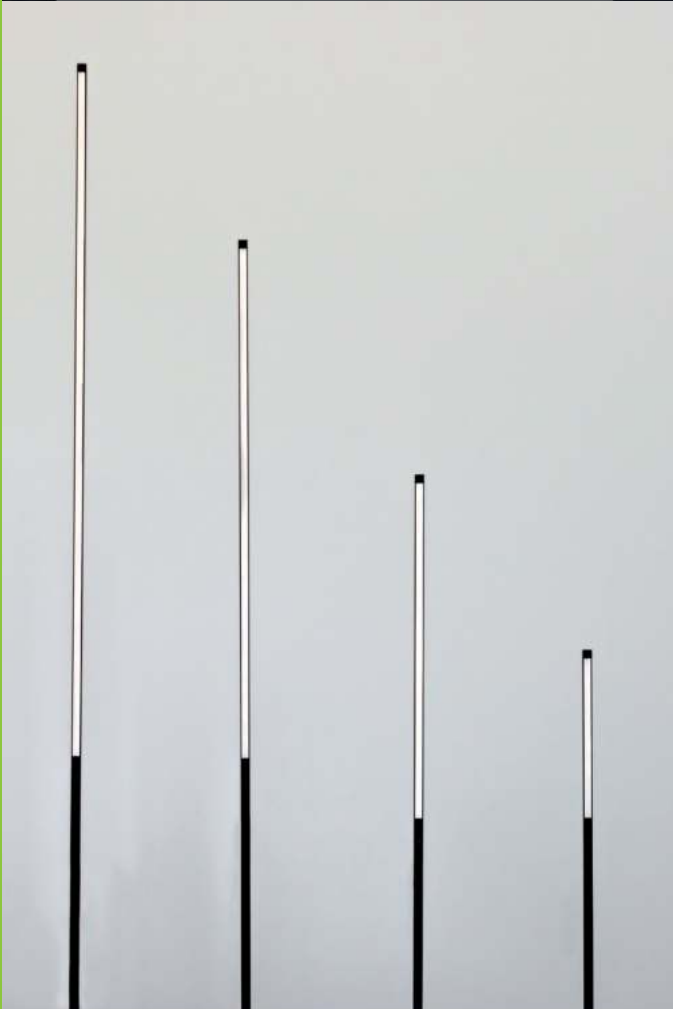
| | |
|-------------------------------|---|
| POWER SUPPLY | 15W/mt - 24V |
| CODE | AV01502GN, AV01579GN, AV01580GN |
| LED COLOUR | N - Natural white 4000°K W - Warm white 3000°K |
| OPTICS | D  160° Diffused |
| FINISHES | M - Marble green K - Corten G - Grey B - Black |
| LUMEN OUTPUT SOURCE | 1000lm/mt (3000°K) |
| DELIVERED LUMEN OUTPUT | 1000lm/mt (3000°K, 160° Diff.) |
| MATERIAL | body in painted inox AISI 316L |
| DRIVER | not included |
| POWER CABLE | includes 2 mt Sub4 FROST-UV 2 x 0,50 cable |
| WIRING | in parallel |
| MOUNTING | fixing (floor) |
| NOTES | other RAL on request |




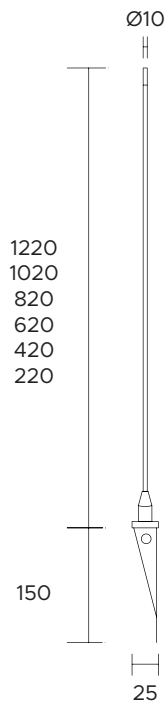


| | |
|-------------------------------|---|
| POWER SUPPLY | max 2W - max 500mA |
| CODE | AV01532GN, AV01533GN, AV01534GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue |
| OPTICS | D  360° |
| FINISHES | I - Inox AISI 316L |
| STEM LENGHT | 1 - 220mm - AV01532GN 2 - 420mm - AV01532GN 3 - 620mm - AV01533GN 4 - 820mm - AV01533GN 5 - 1020mm - AV01534GN 6 - 1220mm - AV01534GN |
| LUMEN OUTPUT SOURCE | 150lm (3000°K, 500mA) |
| DELIVERED LUMEN OUTPUT | 90lm (3000°K, 500mA, 360° Diff.) |
| LED NUMBER | 1 power LED |
| MATERIAL | body in Inox AISI 316L |
| DRIVER | not included |
| POWER CABLE | includes 2 mt Sub4 FROST- UV 2 x 0,50 cable |
| WIRING | in series |
| MOUNTING | fixing (floor) |
| NOTES | other heights on request 24V version on request |


Garden lights



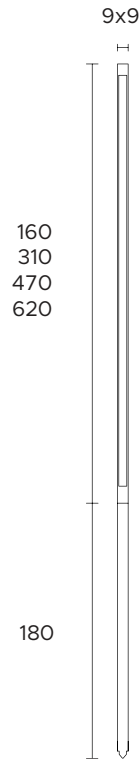


| | |
|-------------------------------|--|
| POWER SUPPLY | 9W/mt - 24V |
| CODE | AV01535GN, AV01536GN, AV01537GN, AV01538GN |
| LED COLOUR | N - Natural white 4000°K W - Warm white 3000°K |
| OPTICS |  160° |
| FINISHES | M - Marble green K - Corten G - Grey B - Black |
| STEM LENGHT | 1 - 160mm - AV01535GN 2 - 310mm - AV01536GN 3 - 470mm - AV01537GN 4 - 620mm - AV01538GN |
| LUMEN OUTPUT SOURCE | 610lm/mt (3000°K) |
| DELIVERED LUMEN OUTPUT | 610lm/mt (3000°K, 160° Diff.) |
| MATERIAL | body in painted inox AISI 316L |
| DRIVER | not included |
| POWER CABLE | includes 2 mt Sub4 FROST- UV 2 x 0,25 cable |
| WIRING | in parallel |
| MOUNTING | fixing (floor) |
| NOTES | other RAL on request |





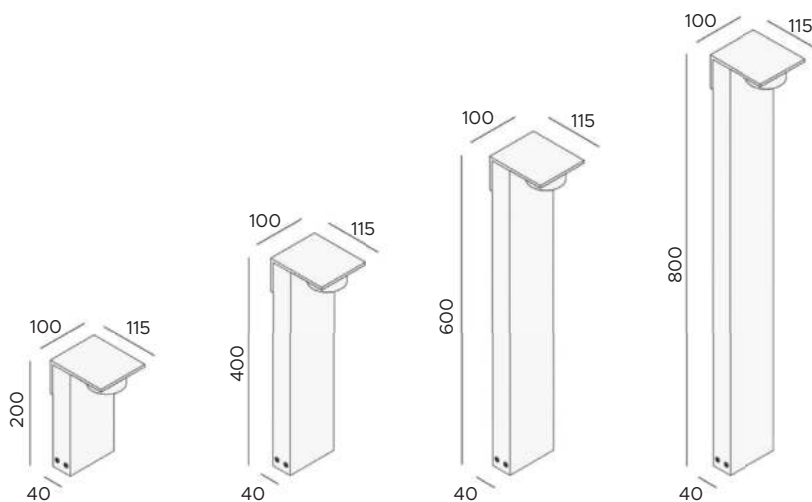

| | | |
|-------------------------------|--|------------------------|
| POWER SUPPLY | max 12W - 220V/240V | |
| CODE | AV01539GN, AV01540GN, AV01541GN, AV01542GN AV01543GN, AV01544GN, AV01545GN, AV01546GN | |
| LED COLOUR | N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K | |
| OPTICS | <input type="checkbox"/> A <input type="checkbox"/> D | Asymmetric Diffused |
| FINISHES | M - Marble green K - Corten G - Grey B - Black | |
| BODY LENGHT | 1 - 200mm - AV01539GN (A) - AV01543GN (D) 2 - 400mm - AV01540GN (A) - AV01544GN (D) 3 - 600mm - AV01541GN (A) - AV01545GN (D) 4 - 800mm - AV01542GN (A) - AV01546GN (D) | |
| LUMEN OUTPUT SOURCE | 1730lm/mt (3000°K) | |
| DELIVERED LUMEN OUTPUT | 1560lm/mt (3000°K, 350mA, Asymmetric) | |
| LED NUMBER | 1 power LED multichip | |
| MATERIAL | body and head in painted aluminium, base in Inox AISI 316L | |
| DRIVER | included | |
| POWER CABLE | | |
| WIRING | | |
| MOUNTING | fixing (floor) | |
| ACCESSORIES | inox plate for ground installation in concrete; inox stake | |
| NOTES | other RAL on request | |







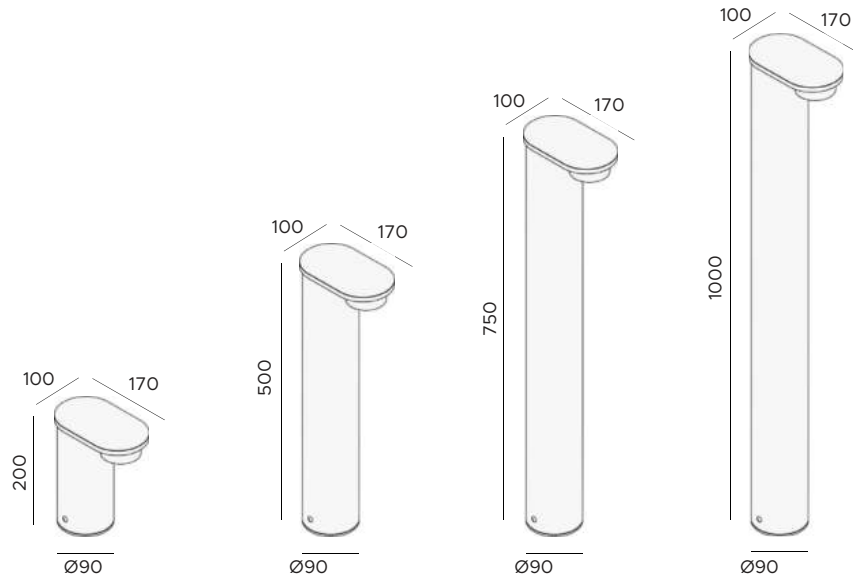






| | | | | | | | | | | | | | |
|-------------------------------|--|-----------------|-----------------|-----------------|-----------|-----------------|-----------------|-----------|-----------------|-----------------|------------|-----------------|-----------------|
| POWER SUPPLY | max 12W - 220V/240V | | | | | | | | | | | | |
| CODE | AV01547GN, AV01548GN, AV01549GN, AV01550GN AV01552GN, AV01553GN, AV01554GN, AV01551GN | | | | | | | | | | | | |
| LED COLOUR | N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K | | | | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td style="text-align: center;">A</td> <td style="text-align: center;">D</td> </tr> <tr> <td style="text-align: center;"></td> <td style="text-align: center;"></td> </tr> <tr> <td style="text-align: center;">Asymmetric</td> <td style="text-align: center;">Diffused</td> </tr> </table> | A | D | | | Asymmetric | Diffused | | | | | | |
| A | D | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| Asymmetric | Diffused | | | | | | | | | | | | |
| FINISHES | M - Marble green K - Corten G - Grey B - Black | | | | | | | | | | | | |
| BODY LENGHT | <table border="0"> <tr> <td>1 - 200mm</td> <td>- AV01547GN (A)</td> <td>- AV01552GN (D)</td> </tr> <tr> <td>2 - 500mm</td> <td>- AV01548GN (A)</td> <td>- AV01553GN (D)</td> </tr> <tr> <td>3 - 750mm</td> <td>- AV01549GN (A)</td> <td>- AV01554GN (D)</td> </tr> <tr> <td>4 - 1000mm</td> <td>- AV01550GN (A)</td> <td>- AV01551GN (D)</td> </tr> </table> | 1 - 200mm | - AV01547GN (A) | - AV01552GN (D) | 2 - 500mm | - AV01548GN (A) | - AV01553GN (D) | 3 - 750mm | - AV01549GN (A) | - AV01554GN (D) | 4 - 1000mm | - AV01550GN (A) | - AV01551GN (D) |
| 1 - 200mm | - AV01547GN (A) | - AV01552GN (D) | | | | | | | | | | | |
| 2 - 500mm | - AV01548GN (A) | - AV01553GN (D) | | | | | | | | | | | |
| 3 - 750mm | - AV01549GN (A) | - AV01554GN (D) | | | | | | | | | | | |
| 4 - 1000mm | - AV01550GN (A) | - AV01551GN (D) | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 1730lm/mt (3000°K) | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 1560lm/mt (3000°K, 350mA, Asymmetric) | | | | | | | | | | | | |
| LED NUMBER | 1 power LED multichip | | | | | | | | | | | | |
| MATERIAL | body and base in painted AISI 316L, head in anodized and painted aluminium | | | | | | | | | | | | |
| DRIVER | included | | | | | | | | | | | | |
| POWER CABLE | | | | | | | | | | | | | |
| WIRING | | | | | | | | | | | | | |
| MOUNTING | fixing (floor) | | | | | | | | | | | | |
| ACCESSORIES | | | | | | | | | | | | | |
| NOTES | other RAL on request | | | | | | | | | | | | |

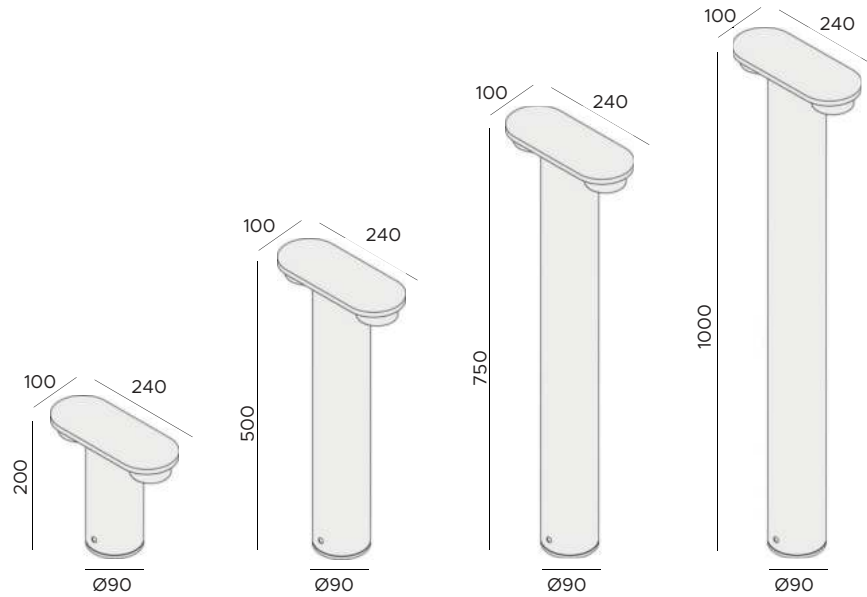



| | | |
|-------------------------------|--|--|
| POWER SUPPLY | max 12W x2 - 220V/240V | |
| CODE | AV01555GN, AV01556GN, AV01557GN, AV015589GN AV01559GN, AV01560GN, AV01561GN, AV01562GN | |
| LED COLOUR | N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K | |
| OPTICS | A  Asymmetric D  Diffused | |
| FINISHES | M - Marble green K - Corten G - Grey B - Black | |
| BODY LENGHT | 1 - 200mm - AV01555GN (A) - AV01559GN (D) 2 - 500mm - AV01556GN (A) - AV01560GN (D) 3 - 750mm - AV01557GN (A) - AV01561GN (D) 4 - 1000mm - AV01558GN (A) - AV01562GN (D) | |
| LUMEN OUTPUT SOURCE | 1730lm/mt (3000°K) x2 | |
| DELIVERED LUMEN OUTPUT | 1560lm/mt (3000°K, 350mA, Asymmetric) x2 | |
| LED NUMBER | 2 power LEDs multichip | |
| MATERIAL | body and base in painted AISI 316L, head in anodized and painted aluminium | |
| DRIVER | included | |
| POWER CABLE | | |
| WIRING | | |
| MOUNTING | fixing (floor) | |
| ACCESSORIES | | |
| NOTES | other RAL on request | |

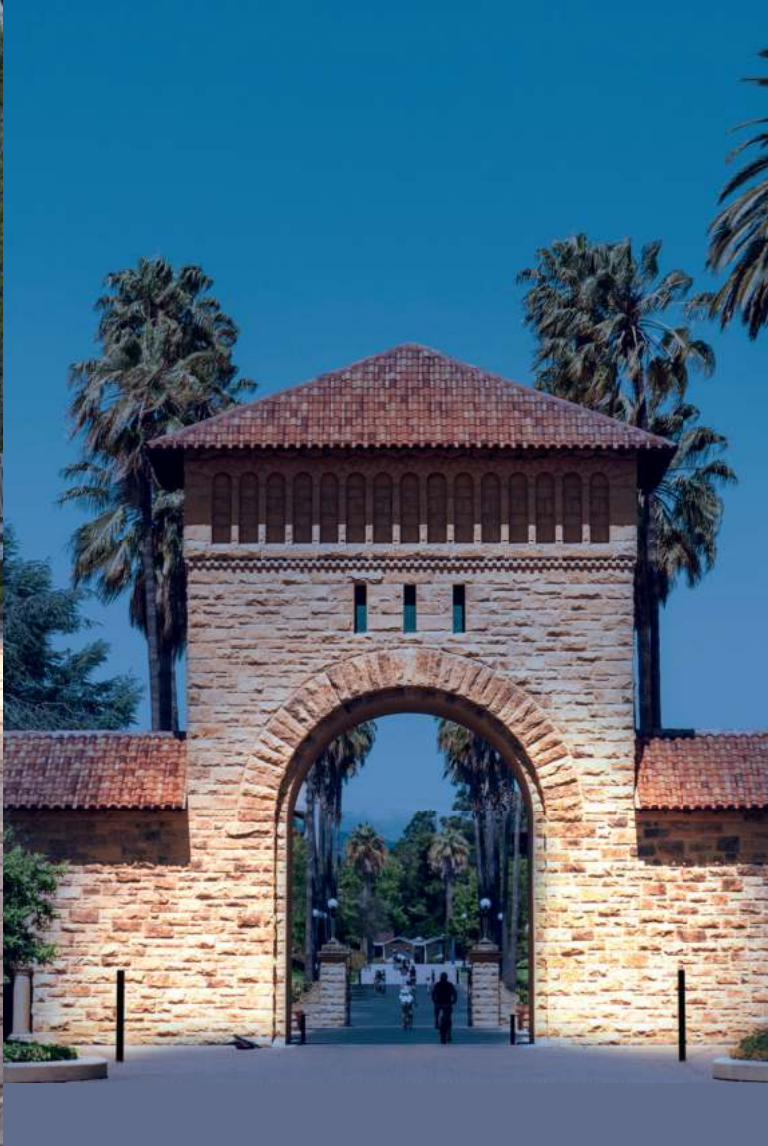

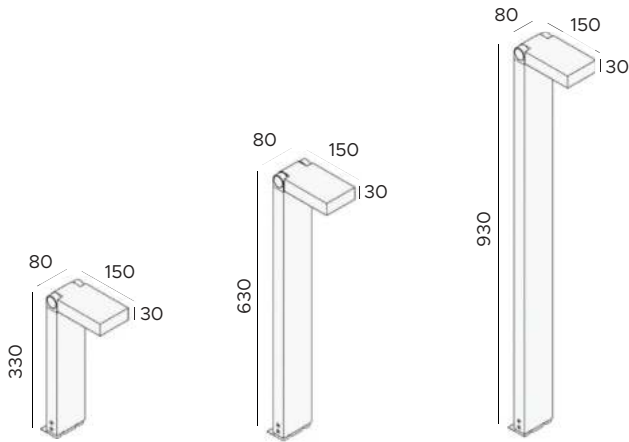

| | | | | | | | | | | | | | |
|-------------------------------|---|-----|----------|---|---|--|--|--|--|-----|-----|-----|----------|
| POWER SUPPLY | max 12W - 220V/240V | | | | | | | | | | | | |
| CODE | AV01563GN, AV01564GN, AV01565GN AV01566GN, AV01567GN, AV01568GN | | | | | | | | | | | | |
| LED COLOUR | N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K | | | | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>M</td> <td>W</td> <td>X</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>30°</td> <td>45°</td> <td>60°</td> <td>Diffused</td> </tr> </table> | M | W | X | D | | | | | 30° | 45° | 60° | Diffused |
| M | W | X | D | | | | | | | | | | |
| | | | | | | | | | | | | | |
| 30° | 45° | 60° | Diffused | | | | | | | | | | |
| FINISHES | M - Marble green K - Corten G - Grey B - Black | | | | | | | | | | | | |
| BODY LENGHT | 1 - 330mm - AV01563GN - AV01566GN (D) 2 - 630mm - AV01564GN - AV01567GN (D) 3 - 930mm - AV01565GN - AV01568GN (D) | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 1730lm/mt (3000°K) | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 1540lm/mt (3000°K, 350mA, 60°) | | | | | | | | | | | | |
| LED NUMBER | 1 power LED multichip | | | | | | | | | | | | |
| MATERIAL | body and head in painted aluminium, base in Inox AISI 316L | | | | | | | | | | | | |
| DRIVER | included | | | | | | | | | | | | |
| POWER CABLE | | | | | | | | | | | | | |
| WIRING | | | | | | | | | | | | | |
| MOUNTING | fixing (floor) | | | | | | | | | | | | |
| ACCESSORIES | | | | | | | | | | | | | |
| NOTES | other RAL on request | | | | | | | | | | | | |



Modello X



Modello Y



Modello X




Modello Y

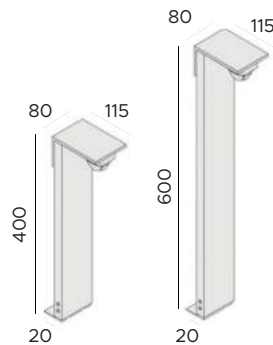


X




Y

| | |
|-------------------------------|---|
| POWER SUPPLY | max 6W - 220V/240V |
| CODE | AV01569GN, AV01570GN Modello X AV01571GN, AV01572GN Modello Y |
| LED COLOUR | N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K |
| OPTICS |  180° x 8° |
| FINISHES | M - Marble green K - Corten G - Grey B - Black |
| BODY LENGHT | 1 - 400mm - AV01569GN (X), AV01571GN (Y) 2 - 600mm - AV01570GN (X), AV01572GN (Y) |
| LUMEN OUTPUT SOURCE | 730lm/mt (3000°K) |
| DELIVERED LUMEN OUTPUT | 650lm/mt (3000°K, 500mA, 180° x 8°) |
| LED NUMBER | 1 power LED multichip |
| MATERIAL | body and head in painted aluminium, base in Inox AISI 316L |
| DRIVER | included |
| POWER CABLE | |
| WIRING | |
| MOUNTING | fixing (floor) |
| ACCESSORIES | |
| NOTES | other RAL on request |

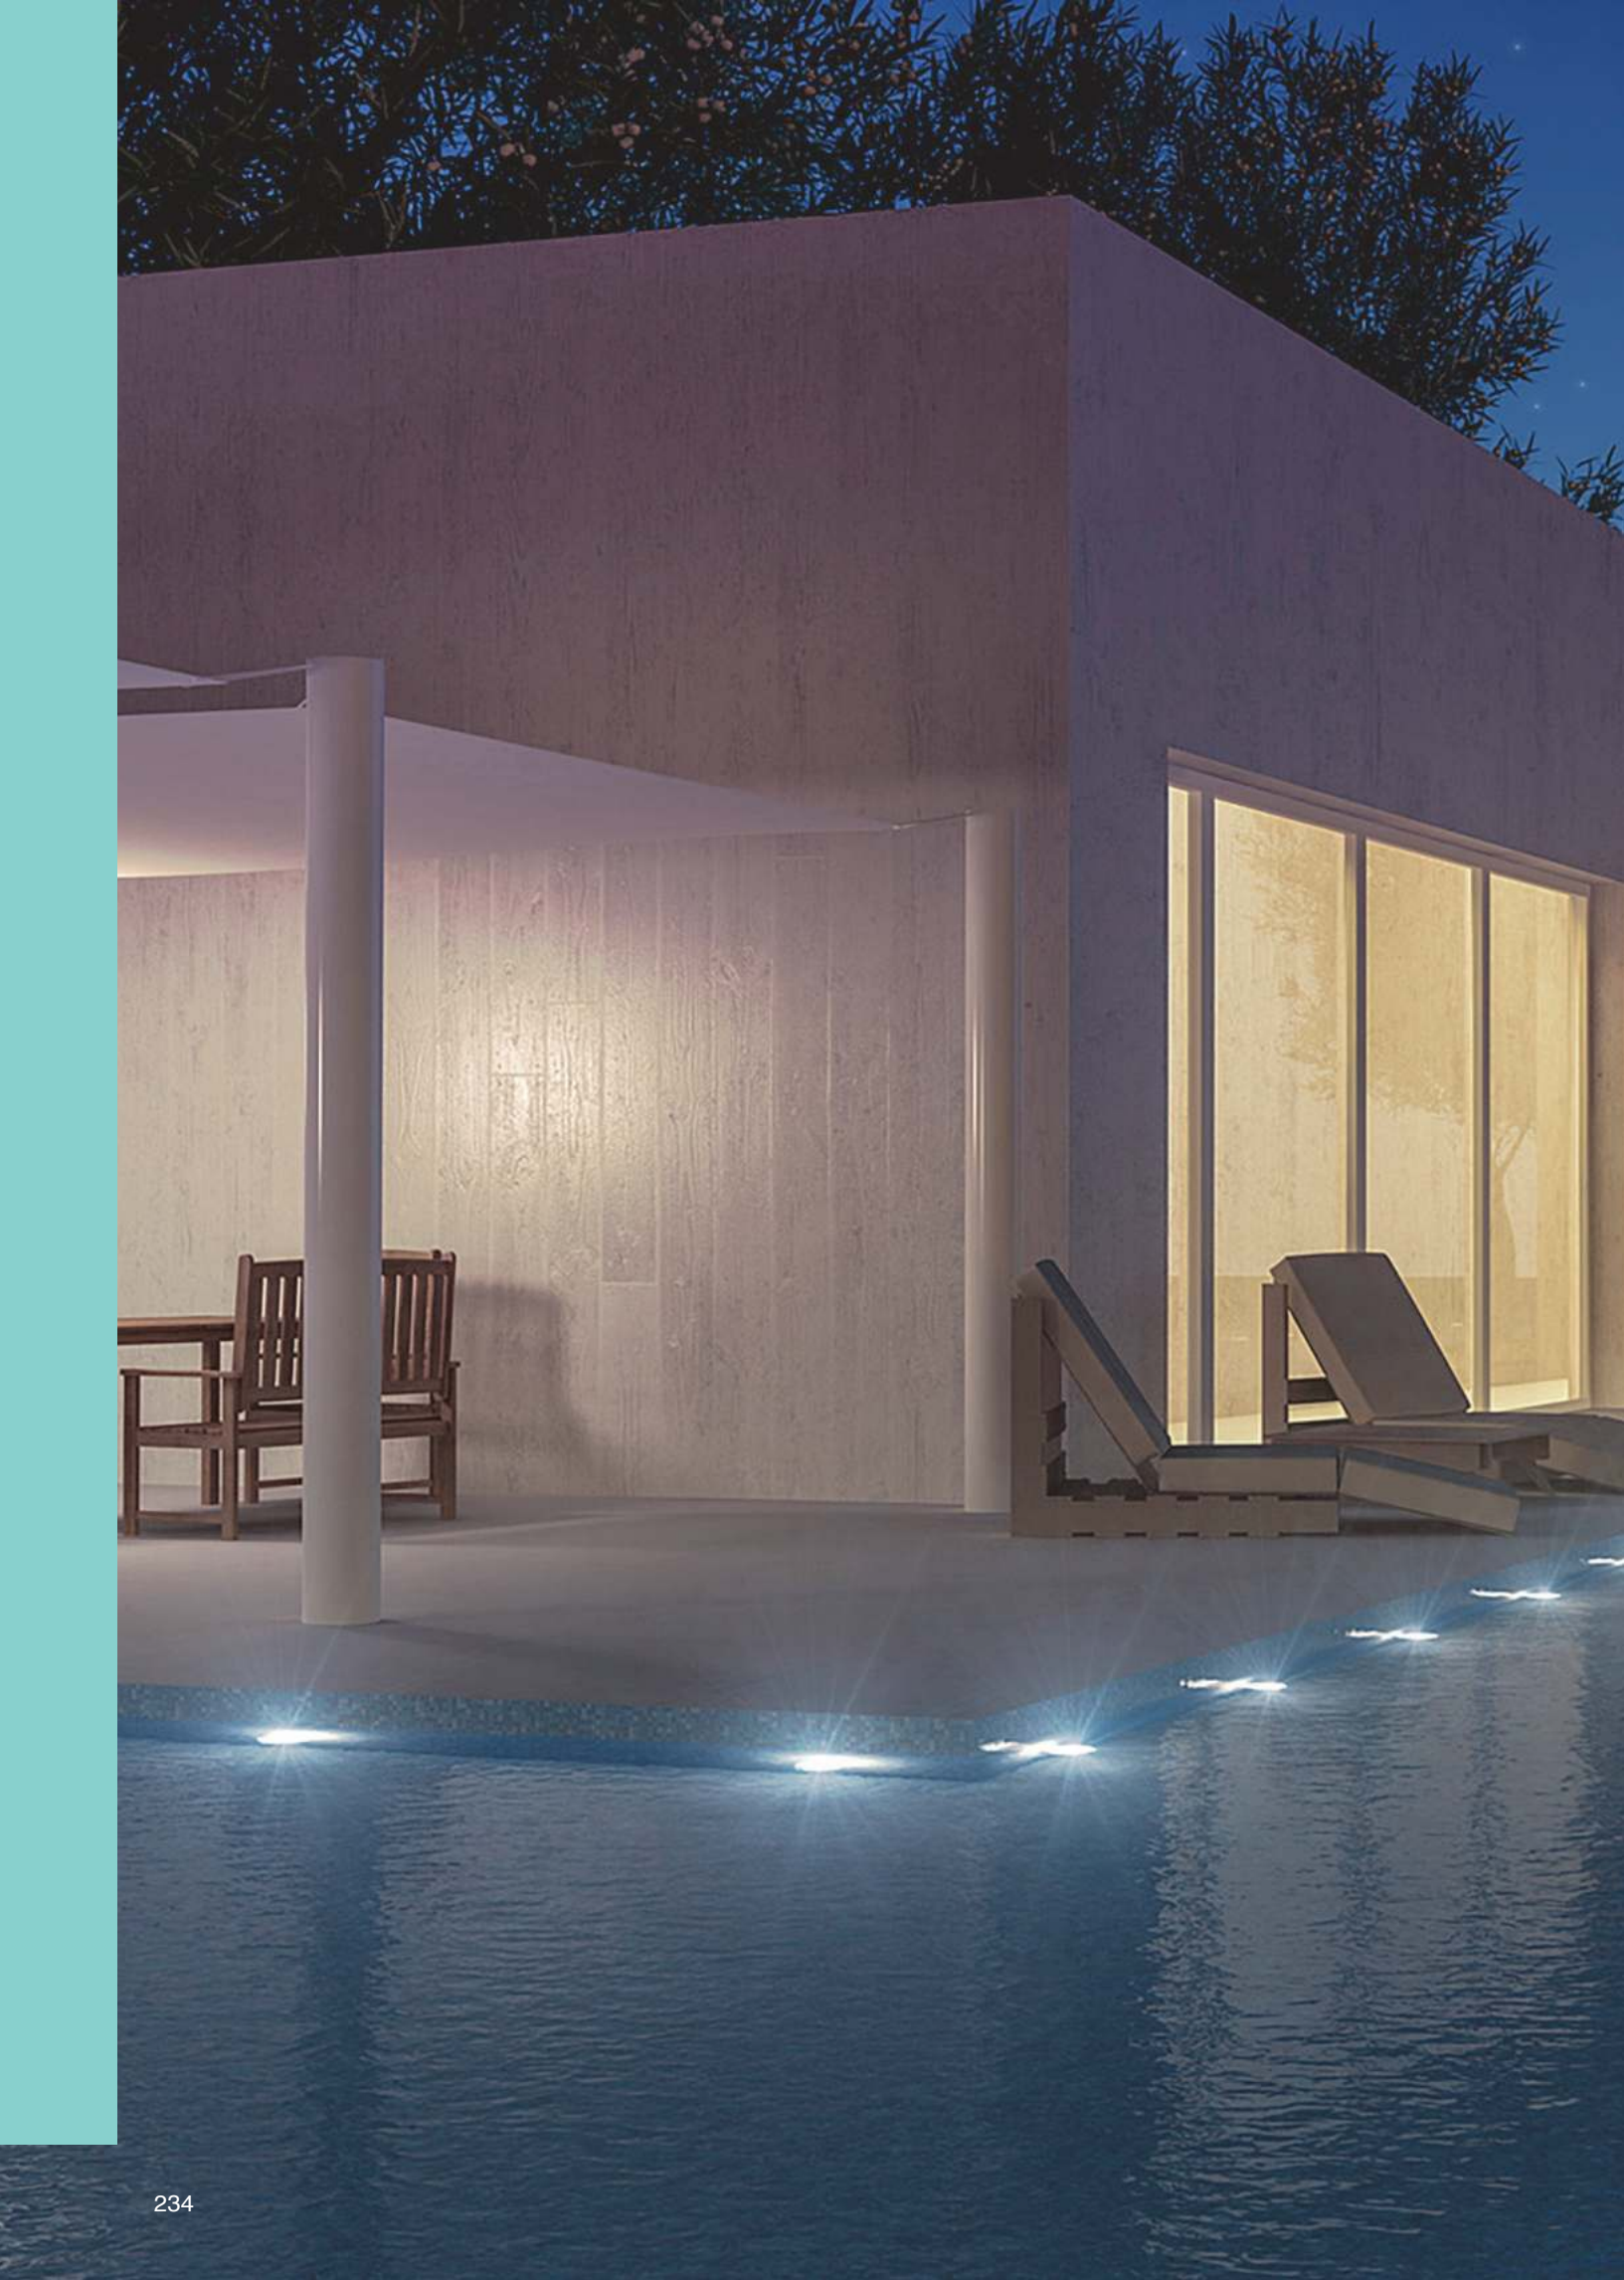

Underwater

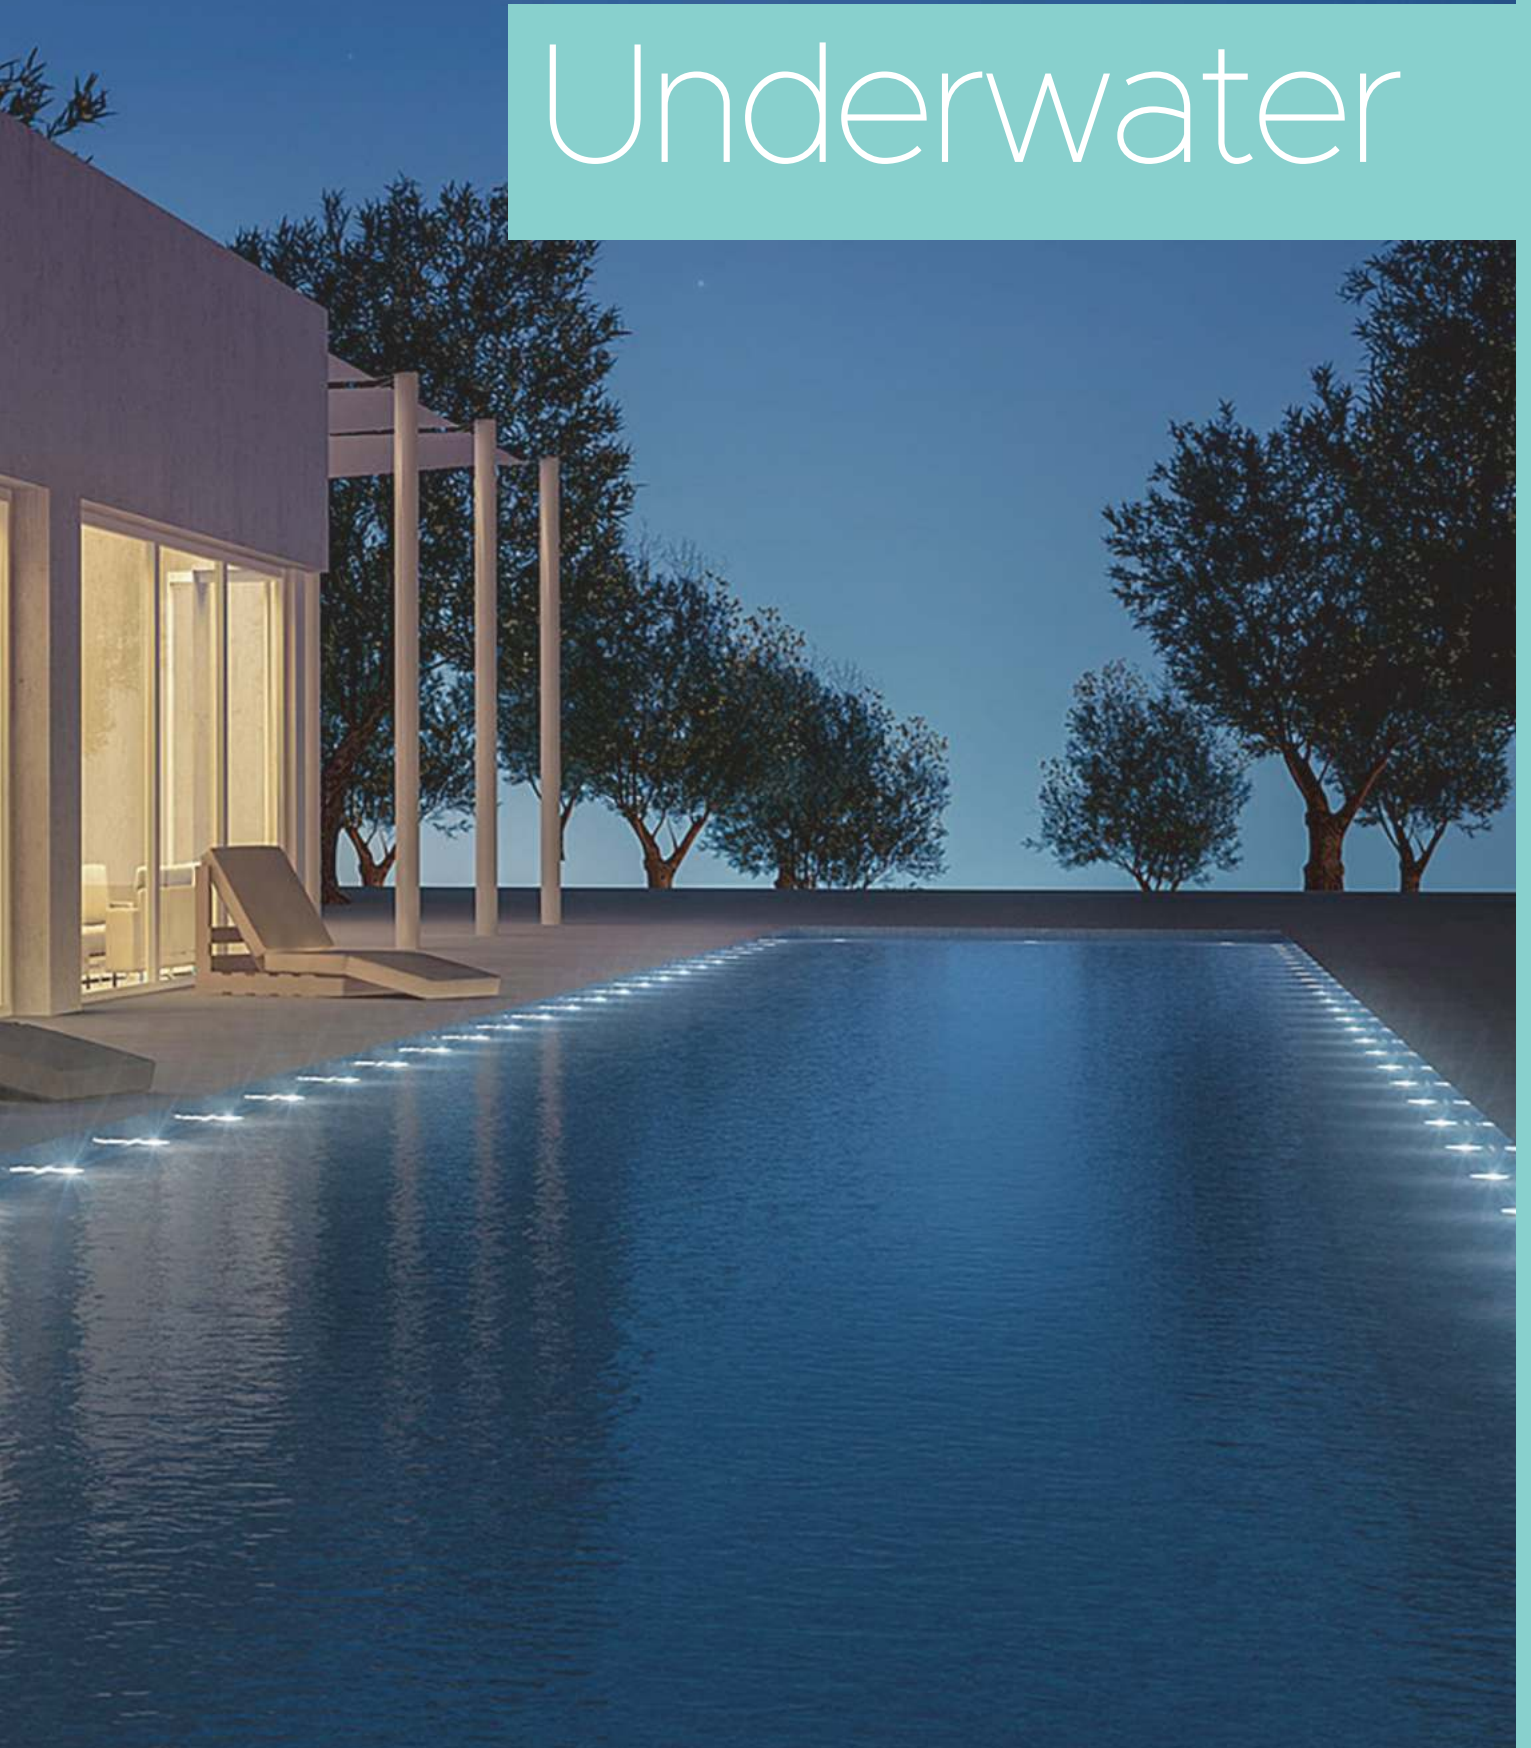





Adjustable spotlights
pag. 239



Adjustable spotlights
pag. 240



Adjustable spotlights
pag. 241



Static spotlights
pag. 242



Static spotlights
pag. 243



Static spotlights
pag. 244



Recessed spotlights
pag. 247




Recessed spotlights
pag. 248




Recessed spotlights
pag. 249

Underwater



Underwater - Adjustable and Static spotlights

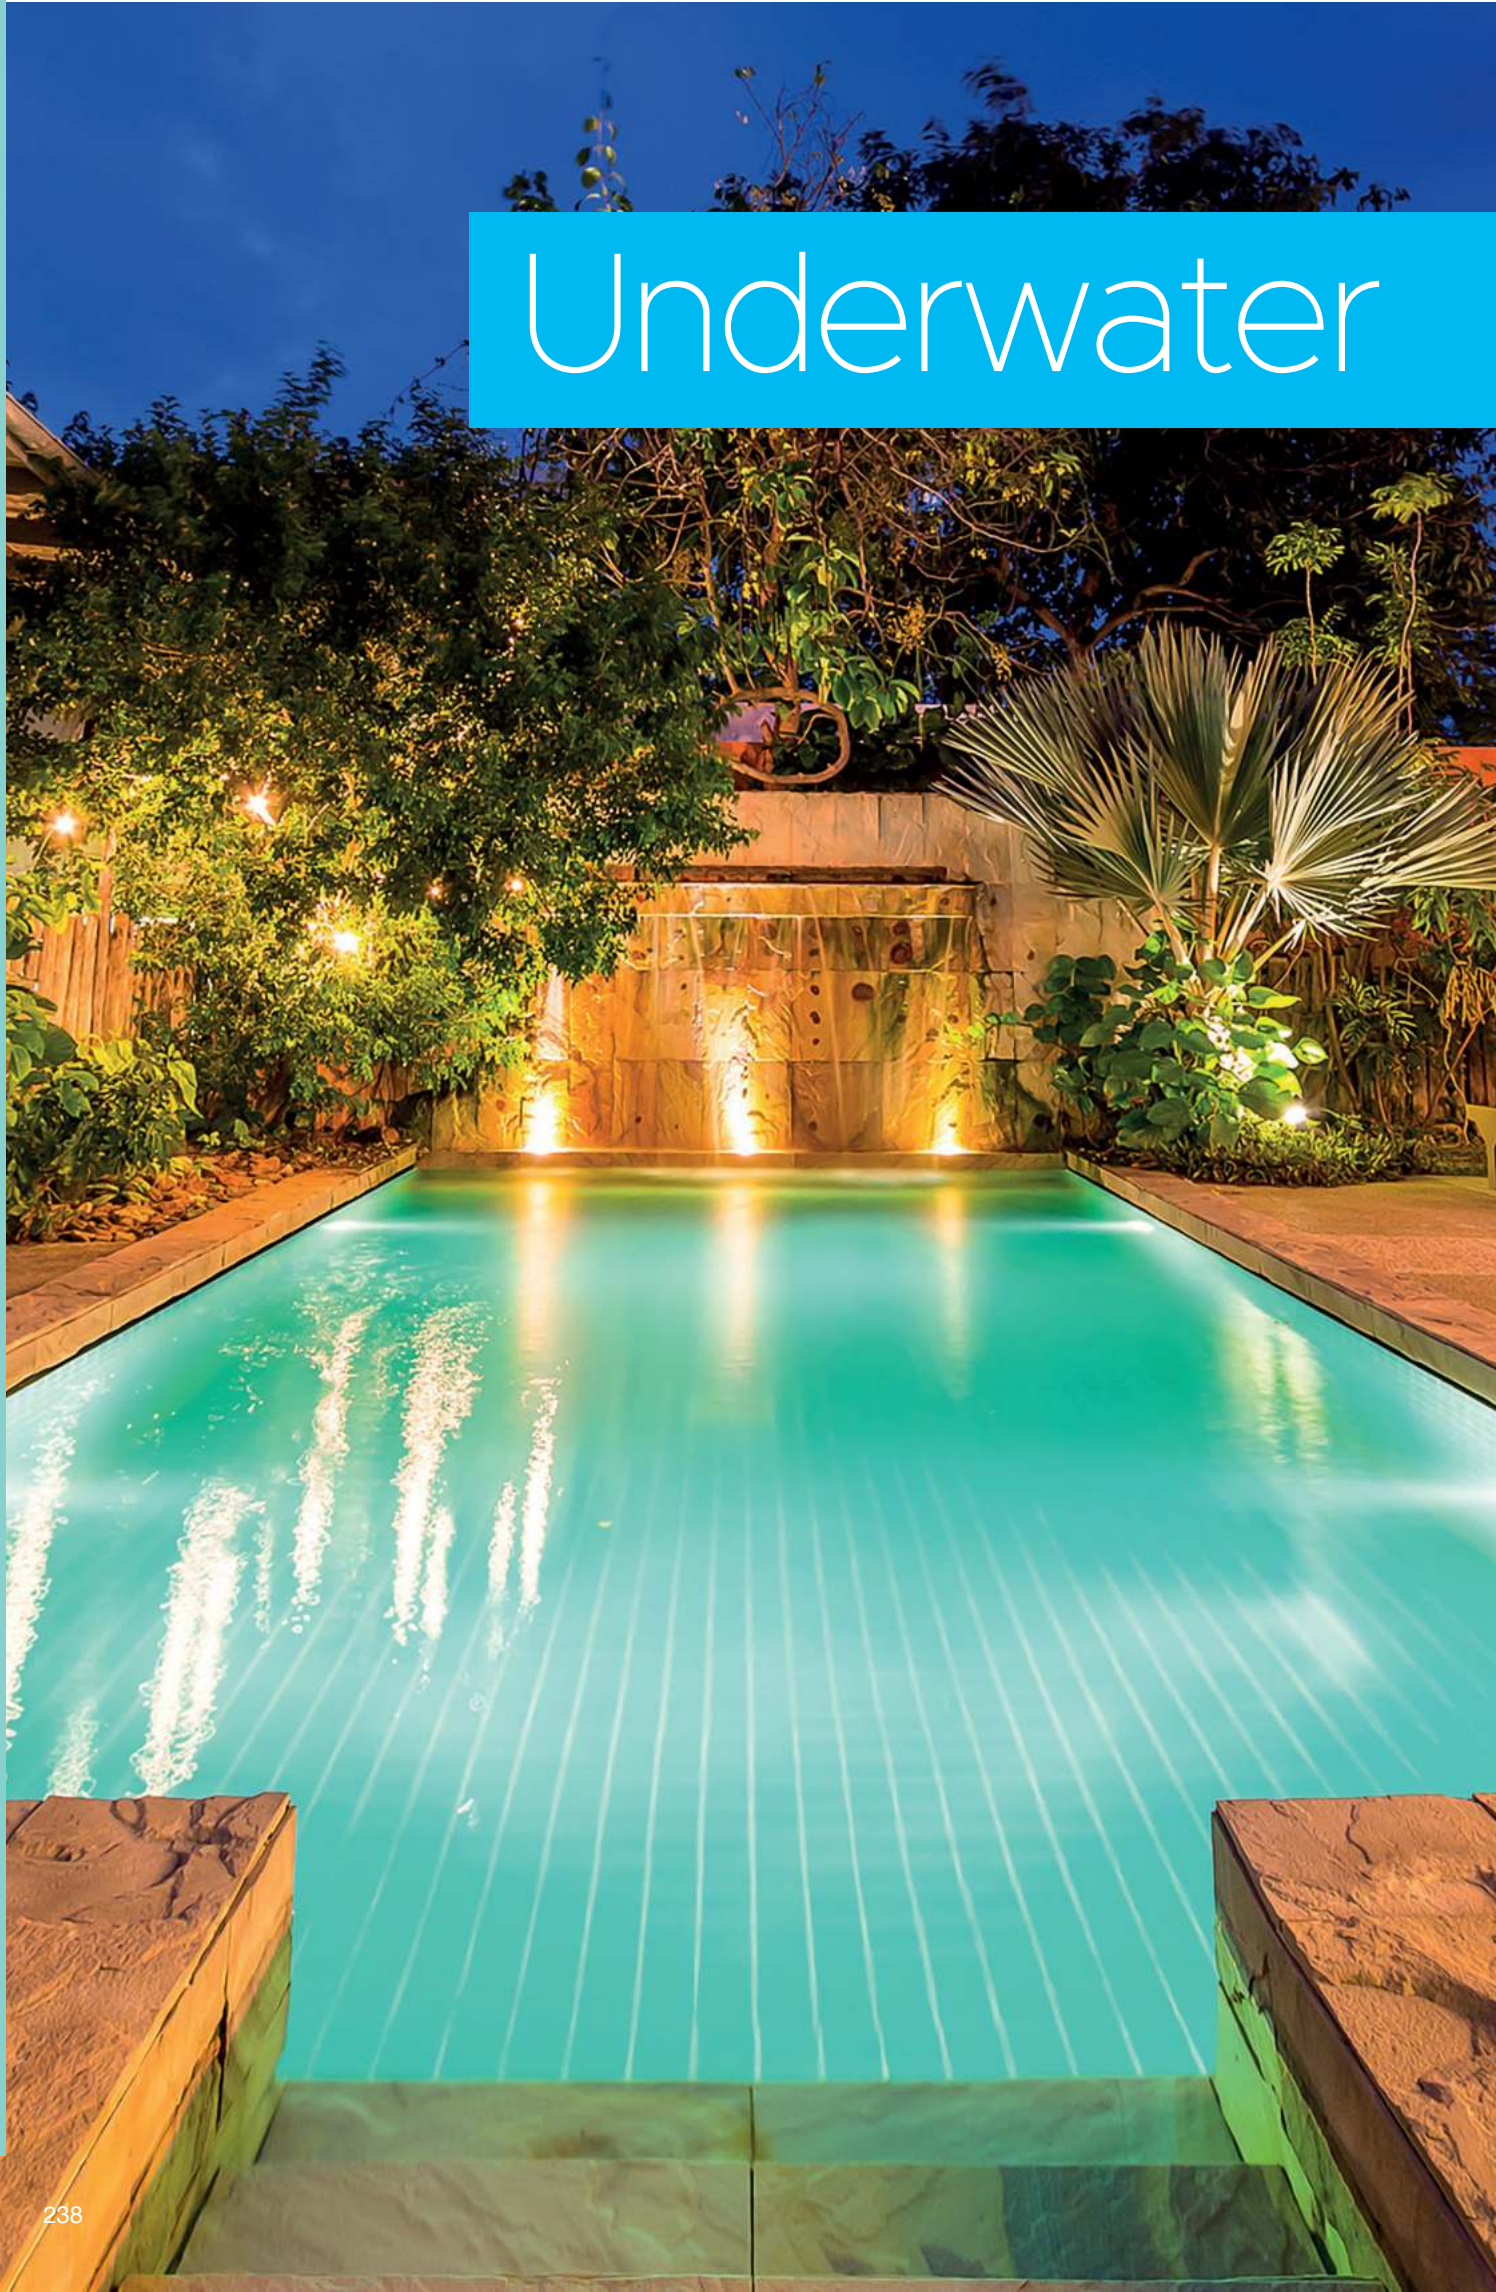




| | | | | | | | | | | | | | | | | |
|-------------------------------|---|-----|-----|------|---|---|--|--|--|--|--|-----|-----|-----|-----|------|
| POWER SUPPLY | max 6W - max 500mA | | | | | | | | | | | | | | | |
| CODE | AV01368GN | | | | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue | | | | | | | | | | | | | | | |
| OPTICS | <table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>T</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> </tr> </table> | N | M | W | X | T | | | | | | 10° | 25° | 40° | 60° | 110° |
| N | M | W | X | T | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | 110° | | | | | | | | | | | | |
| FINISHES | I - Inox AISI 316L | | | | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 450lm (3000°K, 500mA) | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 420lm (3000°K, 500mA, 40°) | | | | | | | | | | | | | | | |
| LED NUMBER | 3 power LEDs | | | | | | | | | | | | | | | |
| MATERIAL | Inox AISI 316L | | | | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | | | | |
| POWER CABLE | includes 5 mt AD8 2 x 0,50 cable | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | |
| MOUNTING | surface (wall, floor) | | | | | | | | | | | | | | | |
| ACCESSORIES | tripod base not included | | | | | | | | | | | | | | | |
| NOTES | | | | | | | | | | | | | | | | |

| | | | | | | | | | | | | | | | | |
|-------------------------------|---|-----|-----|------|---|---|--|--|--|--|--|-----|-----|-----|-----|------|
| POWER SUPPLY | max 9W - max 700mA | | | | | | | | | | | | | | | |
| CODE | AV01368GN | | | | | | | | | | | | | | | |
| LED COLOUR | 1 - RGB 2 - AWB 3 - A WW W | | | | | | | | | | | | | | | |
| OPTICS | <table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>T</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> </tr> </table> | N | M | W | X | T | | | | | | 10° | 25° | 40° | 60° | 110° |
| N | M | W | X | T | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | 110° | | | | | | | | | | | | |
| FINISHES | I - Inox AISI 316L | | | | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 390lm (RGB, 700mA) | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 360lm (RGB, 700mA, 40°) | | | | | | | | | | | | | | | |
| LED NUMBER | 3 power LEDs | | | | | | | | | | | | | | | |
| MATERIAL | Inox AISI 316L | | | | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | | | | |
| POWER CABLE | includes 5 mt AD8 6 x 0,35 cable | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | |
| MOUNTING | surface (wall, floor) | | | | | | | | | | | | | | | |
| ACCESSORIES | tripod base not included | | | | | | | | | | | | | | | |
| NOTES | | | | | | | | | | | | | | | | |

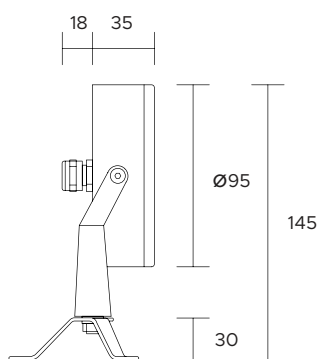


| | | | | | | | | | | | | | | | | |
|-------------------------------|---|-----|-----|------|---|---|--|--|--|--|--|-----|-----|-----|-----|------|
| POWER SUPPLY | max 12W - max 500mA | | | | | | | | | | | | | | | |
| CODE | AV01370GN | | | | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue | | | | | | | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>T</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> </tr> </table> | N | M | W | X | T | | | | | | 10° | 25° | 40° | 60° | 110° |
| N | M | W | X | T | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | 110° | | | | | | | | | | | | |
| FINISHES | I - Inox AISI 316L | | | | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 900lm (3000°K, 500mA) | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 860lm (3000°K, 500mA, 40°) | | | | | | | | | | | | | | | |
| LED NUMBER | 6 power LEDs | | | | | | | | | | | | | | | |
| MATERIAL | Inox AISI 316L | | | | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | | | | |
| POWER CABLE | includes 5 mt AD8 2 x 0,50 cable | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | |
| MOUNTING | surface (wall, floor) | | | | | | | | | | | | | | | |
| ACCESSORIES | tripod base not included | | | | | | | | | | | | | | | |
| NOTES | | | | | | | | | | | | | | | | |

| | | | | | | | | | | | | | | | | |
|-------------------------------|---|-----|-----|------|---|---|--|--|--|--|--|-----|-----|-----|-----|------|
| POWER SUPPLY | max 18W - max 700mA | | | | | | | | | | | | | | | |
| CODE | AV01370GN | | | | | | | | | | | | | | | |
| LED COLOUR | 1 - RGB 2 - AWB 3 - A WW W | | | | | | | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>T</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> </tr> </table> | N | M | W | X | T | | | | | | 10° | 25° | 40° | 60° | 110° |
| N | M | W | X | T | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | 110° | | | | | | | | | | | | |
| FINISHES | I - Inox AISI 316L | | | | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 780lm (RGB, 700mA) | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 720lm (RGB, 700mA, 40°) | | | | | | | | | | | | | | | |
| LED NUMBER | 6 power LEDs | | | | | | | | | | | | | | | |
| MATERIAL | Inox AISI 316L | | | | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | | | | |
| POWER CABLE | includes 5 mt AD8 6 x 0,35 cable | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | |
| MOUNTING | surface (wall, floor) | | | | | | | | | | | | | | | |
| ACCESSORIES | tripod base not included | | | | | | | | | | | | | | | |
| NOTES | | | | | | | | | | | | | | | | |

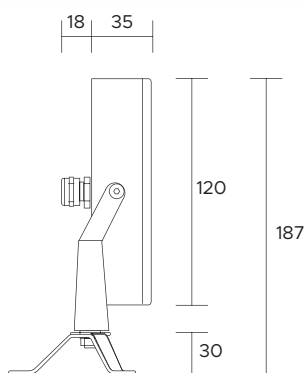


| | | | | | | | | | | | | | | | | |
|-------------------------------|---|-----|-----|------|---|---|--|--|--|--|--|-----|-----|-----|-----|------|
| POWER SUPPLY | max 24W - max 500mA | | | | | | | | | | | | | | | |
| CODE | AV01371GN | | | | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue | | | | | | | | | | | | | | | |
| OPTICS | <table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>T</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> </tr> </table> | N | M | W | X | T | | | | | | 10° | 25° | 40° | 60° | 110° |
| N | M | W | X | T | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | 110° | | | | | | | | | | | | |
| FINISHES | I - Inox AISI 316L | | | | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 1800lm (3000°K, 500mA) | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 1690lm (3000°K, 500mA, 40°) | | | | | | | | | | | | | | | |
| LED NUMBER | 12 power LEDs | | | | | | | | | | | | | | | |
| MATERIAL | Inox AISI 316L | | | | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | | | | |
| POWER CABLE | includes 5 mt AD8 2 x 0,50 cable | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | |
| MOUNTING | surface (wall, floor) | | | | | | | | | | | | | | | |
| ACCESSORIES | tripod base not included | | | | | | | | | | | | | | | |
| NOTES | | | | | | | | | | | | | | | | |

| | | | | | | | | | | | | | | | | |
|-------------------------------|---|-----|-----|------|---|---|--|--|--|--|--|-----|-----|-----|-----|------|
| POWER SUPPLY | max 36W - max 700mA | | | | | | | | | | | | | | | |
| CODE | AV01371GN | | | | | | | | | | | | | | | |
| LED COLOUR | 1 - RGB 2 - AWB 3 - A WW W | | | | | | | | | | | | | | | |
| OPTICS | <table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>T</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> </tr> </table> | N | M | W | X | T | | | | | | 10° | 25° | 40° | 60° | 110° |
| N | M | W | X | T | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | 110° | | | | | | | | | | | | |
| FINISHES | I - Inox AISI 316L | | | | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 1560lm (RGB, 700mA) | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 1440lm (RGB, 700mA, 40°) | | | | | | | | | | | | | | | |
| LED NUMBER | 12 power LEDs | | | | | | | | | | | | | | | |
| MATERIAL | Inox AISI 316L | | | | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | | | | |
| POWER CABLE | includes 5 mt AD8 6 x 0,35 cable | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | |
| MOUNTING | surface (wall, floor) | | | | | | | | | | | | | | | |
| ACCESSORIES | tripod base not included | | | | | | | | | | | | | | | |
| NOTES | | | | | | | | | | | | | | | | |

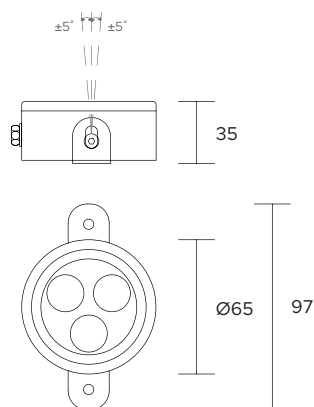

| | | | | | | | | | | | |
|-------------------------------|--|-----|-----|------|---|---|-----|-----|-----|-----|------|
| POWER SUPPLY | max 6W - max 500mA | | | | | | | | | | |
| CODE | AV01372GN | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue | | | | | | | | | | |
| OPTICS | <table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>T</td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> </tr> </table> | N | M | W | X | T | 10° | 25° | 40° | 60° | 110° |
| N | M | W | X | T | | | | | | | |
| 10° | 25° | 40° | 60° | 110° | | | | | | | |
| FINISHES | I - Inox AISI 316L | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 450lm (3000°K, 500mA) | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 420lm (3000°K, 500mA, 40°) | | | | | | | | | | |
| LED NUMBER | 3 power LEDs | | | | | | | | | | |
| MATERIAL | Inox AISI 316L | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | |
| POWER CABLE | includes 5 mt AD8 2 x 0,50 cable | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | |
| MOUNTING | surface (wall, floor) | | | | | | | | | | |
| NOTES | | | | | | | | | | | |




| | | | | | | | | | | | |
|-------------------------------|--|-----|-----|------|---|---|-----|-----|-----|-----|------|
| POWER SUPPLY | max 9W - max 700mA | | | | | | | | | | |
| CODE | AV01372GN | | | | | | | | | | |
| LED COLOUR | 1 - RGB 2 - AWB 3 - A WW W | | | | | | | | | | |
| OPTICS | <table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>T</td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> </tr> </table> | N | M | W | X | T | 10° | 25° | 40° | 60° | 110° |
| N | M | W | X | T | | | | | | | |
| 10° | 25° | 40° | 60° | 110° | | | | | | | |
| FINISHES | I - Inox AISI 316L | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 390lm (RGB, 700mA) | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 360lm (RGB, 700mA, 40°) | | | | | | | | | | |
| LED NUMBER | 3 power LEDs | | | | | | | | | | |
| MATERIAL | Inox AISI 316L | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | |
| POWER CABLE | includes 5 mt AD8 6 x 0,35 cable | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | |
| MOUNTING | surface (wall, floor) | | | | | | | | | | |
| NOTES | | | | | | | | | | | |

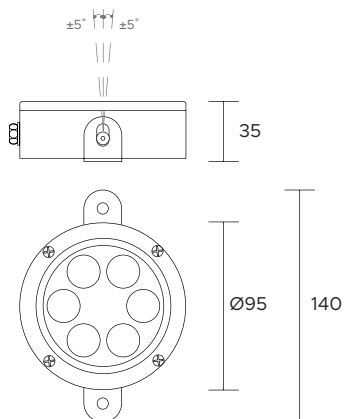

| | | | | | | | | | | | | | | | | |
|-------------------------------|---|-----|-----|------|---|---|--|--|--|--|--|-----|-----|-----|-----|------|
| POWER SUPPLY | max 12W - max 500mA | | | | | | | | | | | | | | | |
| CODE | AV01374GN | | | | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue | | | | | | | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>T</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> </tr> </table> | N | M | W | X | T | | | | | | 10° | 25° | 40° | 60° | 110° |
| N | M | W | X | T | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | 110° | | | | | | | | | | | | |
| FINISHES | I - Inox AISI 316L | | | | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 900lm (3000°K, 500mA) | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 860lm (3000°K, 500mA, 40°) | | | | | | | | | | | | | | | |
| LED NUMBER | 6 power LEDs | | | | | | | | | | | | | | | |
| MATERIAL | Inox AISI 316L | | | | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | | | | |
| POWER CABLE | includes 5 mt AD8 2 x 0,50 cable | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | |
| MOUNTING | surface (wall, floor) | | | | | | | | | | | | | | | |
| NOTES | | | | | | | | | | | | | | | | |



| | | | | | | | | | | | | | | | | |
|-------------------------------|---|-----|-----|------|---|---|--|--|--|--|--|-----|-----|-----|-----|------|
| POWER SUPPLY | max 18W - max 700mA | | | | | | | | | | | | | | | |
| CODE | AV01374GN | | | | | | | | | | | | | | | |
| LED COLOUR | 1 - RGB 2 - AWB 3 - A WW W | | | | | | | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>T</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> </tr> </table> | N | M | W | X | T | | | | | | 10° | 25° | 40° | 60° | 110° |
| N | M | W | X | T | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | 110° | | | | | | | | | | | | |
| FINISHES | I - Inox AISI 316L | | | | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 780lm (RGB, 700mA) | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 720lm (RGB, 700mA, 40°) | | | | | | | | | | | | | | | |
| LED NUMBER | 6 power LEDs | | | | | | | | | | | | | | | |
| MATERIAL | Inox AISI 316L | | | | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | | | | |
| POWER CABLE | includes 5 mt AD8 6 x 0,35 cable | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | |
| MOUNTING | surface (wall, floor) | | | | | | | | | | | | | | | |
| NOTES | | | | | | | | | | | | | | | | |

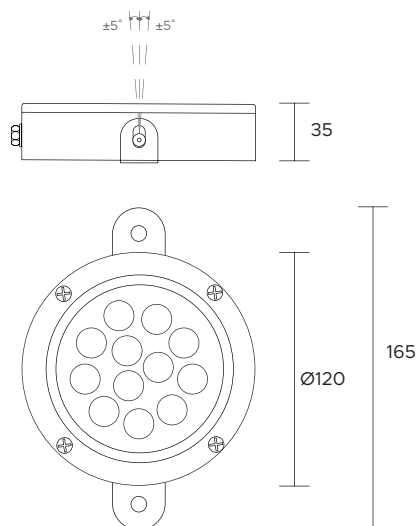


| | | | | | | | | | | | | | | | | |
|-------------------------------|---|-----|-----|------|---|---|--|--|--|--|--|-----|-----|-----|-----|------|
| POWER SUPPLY | max 24W - max 500mA | | | | | | | | | | | | | | | |
| CODE | AV01375GN | | | | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue | | | | | | | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>T</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> </tr> </table> | N | M | W | X | T | | | | | | 10° | 25° | 40° | 60° | 110° |
| N | M | W | X | T | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | 110° | | | | | | | | | | | | |
| FINISHES | I - Inox AISI 316L | | | | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 1800lm (3000°K, 500mA) | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 1690lm (3000°K, 500mA, 40°) | | | | | | | | | | | | | | | |
| LED NUMBER | 12 power LEDs | | | | | | | | | | | | | | | |
| MATERIAL | Inox AISI 316L | | | | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | | | | |
| POWER CABLE | includes 5 mt AD8 2 x 0,50 cable | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | |
| MOUNTING | surface (wall, floor) | | | | | | | | | | | | | | | |
| NOTES | | | | | | | | | | | | | | | | |

| | | | | | | | | | | | | | | | | |
|-------------------------------|---|-----|-----|------|---|---|--|--|--|--|--|-----|-----|-----|-----|------|
| POWER SUPPLY | max 36W - max 700mA | | | | | | | | | | | | | | | |
| CODE | AV01375GN | | | | | | | | | | | | | | | |
| LED COLOUR | 1 - RGB 2 - AWB 3 - A WW W | | | | | | | | | | | | | | | |
| OPTICS | <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>T</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> </tr> </table> | N | M | W | X | T | | | | | | 10° | 25° | 40° | 60° | 110° |
| N | M | W | X | T | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | 110° | | | | | | | | | | | | |
| FINISHES | I - Inox AISI 316L | | | | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 1560lm (RGB, 700mA) | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 1440lm (RGB, 700mA, 40°) | | | | | | | | | | | | | | | |
| LED NUMBER | 12 power LEDs | | | | | | | | | | | | | | | |
| MATERIAL | Inox AISI 316L | | | | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | | | | |
| POWER CABLE | includes 5 mt AD8 6 x 0,35 cable | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | |
| MOUNTING | surface (wall, floor) | | | | | | | | | | | | | | | |
| NOTES | | | | | | | | | | | | | | | | |






Underwater - Static spotlights



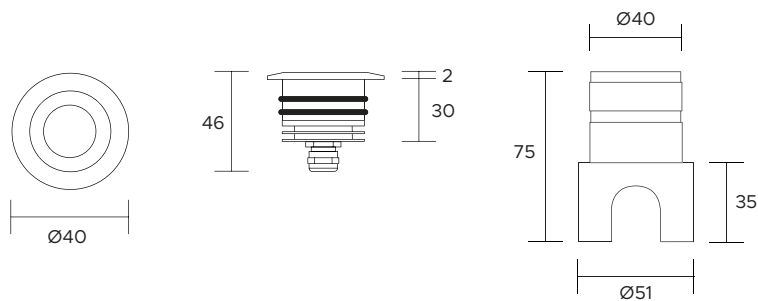


| | | | | | | | | | | | | | | | | |
|-------------------------------|--|-----|-----|------|---|---|--|--|--|--|--|-----|-----|-----|-----|------|
| POWER SUPPLY | max 2W - max 500mA | | | | | | | | | | | | | | | |
| CODE | AV01376GN | | | | | | | | | | | | | | | |
| LED COLOUR | <ul style="list-style-type: none"> C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue | | | | | | | | | | | | | | | |
| OPTICS | <table border="0" style="width: 100%; text-align: center;"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>T</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> </tr> </table> | N | M | W | X | T | | | | | | 10° | 25° | 40° | 60° | 110° |
| N | M | W | X | T | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| 10° | 25° | 40° | 60° | 110° | | | | | | | | | | | | |
| FINISHES | I - Inox AISI 316L | | | | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 150lm (3000°K, 500mA) | | | | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 120lm (3000°K, 500mA, 40°) | | | | | | | | | | | | | | | |
| LED NUMBER | 1 power LED | | | | | | | | | | | | | | | |
| MATERIAL | Inox AISI 316L | | | | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | | | | |
| POWER CABLE | includes 5 mt AD8 2 x 0,50 cable | | | | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | | | | |
| MOUNTING | recessed (wall, floor) | | | | | | | | | | | | | | | |
| ACCESSORIES | PVC outer case code AV01377GN | | | | | | | | | | | | | | | |
| NOTES | 24V version on request | | | | | | | | | | | | | | | |

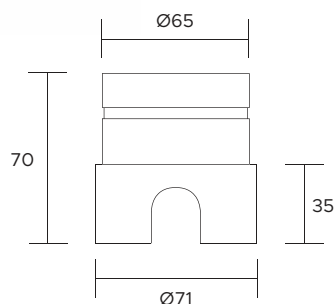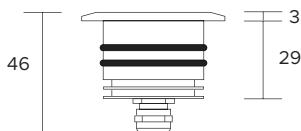

| | | | | | | | | | | | | | |
|-------------------------------|---|-----|------|---|---|--|--|--|--|-----|-----|-----|------|
| POWER SUPPLY | max 6W - max 500mA | | | | | | | | | | | | |
| CODE | AV01380GN | | | | | | | | | | | | |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue | | | | | | | | | | | | |
| OPTICS | <table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>T</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>110°</td> </tr> </table> | N | M | W | T | | | | | 10° | 25° | 40° | 110° |
| N | M | W | T | | | | | | | | | | |
| | | | | | | | | | | | | | |
| 10° | 25° | 40° | 110° | | | | | | | | | | |
| FINISHES | I - Inox AISI 316L | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 450lm (3000°K, 500mA) | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 350lm (3000°K, 500mA, 40°) | | | | | | | | | | | | |
| LED NUMBER | 3 power LEDs | | | | | | | | | | | | |
| MATERIAL | Inox AISI 316L | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | |
| POWER CABLE | includes 5 mt AD8 2 x 0,50 cable | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | |
| MOUNTING | recessed (wall, floor) | | | | | | | | | | | | |
| ACCESSORIES | PVC outer case code AV01381GN | | | | | | | | | | | | |
| NOTES | 24V version on request | | | | | | | | | | | | |

| | | | | | | | | | | | | | |
|-------------------------------|---|-----|------|---|---|--|--|--|--|-----|-----|-----|------|
| POWER SUPPLY | max 9W - max 700mA | | | | | | | | | | | | |
| CODE | AV01380GN | | | | | | | | | | | | |
| LED COLOUR | 1 - RGB 2 - AWB 3 - A WW W | | | | | | | | | | | | |
| OPTICS | <table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>T</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>110°</td> </tr> </table> | N | M | W | T | | | | | 10° | 25° | 40° | 110° |
| N | M | W | T | | | | | | | | | | |
| | | | | | | | | | | | | | |
| 10° | 25° | 40° | 110° | | | | | | | | | | |
| FINISHES | I - Inox AISI 316L | | | | | | | | | | | | |
| LUMEN OUTPUT SOURCE | 390lm (RGB, 700mA) | | | | | | | | | | | | |
| DELIVERED LUMEN OUTPUT | 360lm (RGB, 700mA, 40°) | | | | | | | | | | | | |
| LED NUMBER | 3 power LEDs | | | | | | | | | | | | |
| MATERIAL | Inox AISI 316L | | | | | | | | | | | | |
| DRIVER | not included | | | | | | | | | | | | |
| POWER CABLE | includes 5 mt AD8 6 x 0,35 cable | | | | | | | | | | | | |
| WIRING | in series | | | | | | | | | | | | |
| MOUNTING | recessed (wall, floor) | | | | | | | | | | | | |
| ACCESSORIES | PVC outer case code AV01381GN | | | | | | | | | | | | |
| NOTES | 24V version on request | | | | | | | | | | | | |

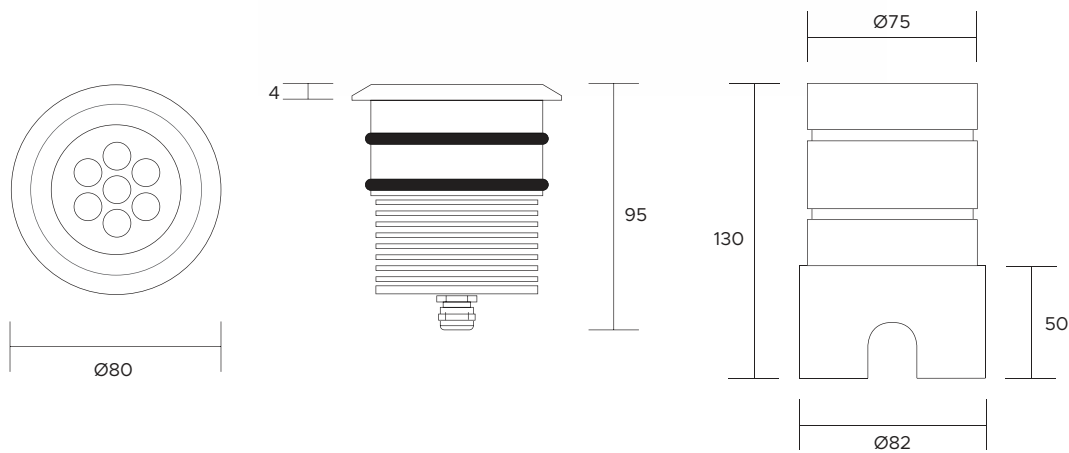

| | |
|-------------------------------|--|
| POWER SUPPLY | max 14W - max 500mA |
| CODE | AV01384GN |
| LED COLOUR | C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue |
| OPTICS | N 10° M 25° P 35° |
| FINISHES | I - Inox AISI 316L |
| LUMEN OUTPUT SOURCE | 1050lm (3000°K, 500mA) |
| DELIVERED LUMEN OUTPUT | 900lm (3000°K, 500mA, 35°) |
| LED NUMBER | 7 power LEDs |
| MATERIAL | Inox AISI 316L |
| DRIVER | not included |
| POWER CABLE | includes 5 mt AD8 2 x 0,50 cable |
| WIRING | in series |
| MOUNTING | recessed (wall, floor) |
| ACCESSORIES | PVC outer case code AV01385GN |
| NOTES | 24V version on request |

